

RESILIENT OS&Y GATE VALVE

Mod. XZ41X | RXZ31X

SPECIFICATIONS

Available Sizes:

From 2" to 12"

Connection Ends:

XZ41X - Flange to ASME B16.1 CL 125

RXZ31X - Mechanical Joint

Working Pressure:

300 PSI

Temperature Range:

0°C - 100°C

Coating:

Fusion Bonded Epoxy Coating Complies with ANSI/ AWWA C550

Brand:

MECH

MATERIAL SPECIFICATIONS

1	Valve body	ASTM A536, 65-45-12
2	Resilient wedge disc	ASTM A536, 65-45-12+EPDM
3	Stem	Stainless Steel
4	Bonnet Gasket	EPDM
5	Bonnet	ASTM A536, 65-45-12
6	Stem Packing	EPDM
7	Yoke	ASTM A536, 65-45-12
8	Stem bushing	Brass Hpb59-1
9	Gland	ASTM A536, 65-45-12



10	Stem Nut	Brass Hpb59-1
11	Handwheel	ASTM A536, 65-45-12
12	Washer	Brass Hpb59-1
13	Gland Nut	Carbon Steel Zinc Plated
14	Stud	Carbon Steel Zinc Plated
15	Flat Washer	Carbon Steel Zinc Plated
16	Nut	Carbon Steel Zinc Plated
17	O-Ring	NBR
18	Plug	C89833

INTERNATIONAL APPROVAL




VEN-FI-03.01.02

SUBMITTAL INFORMATION

PROJECT:	CONTRACTOR:	DATE:
ENGINEER:	SPECIFICATION REFERENCE:	SYSTEM TYPE:
LOCATIONS:	COMMENTS:	

RESILIENT OS&Y GATE VALVE

Mod. XZ41X | RXZ31X

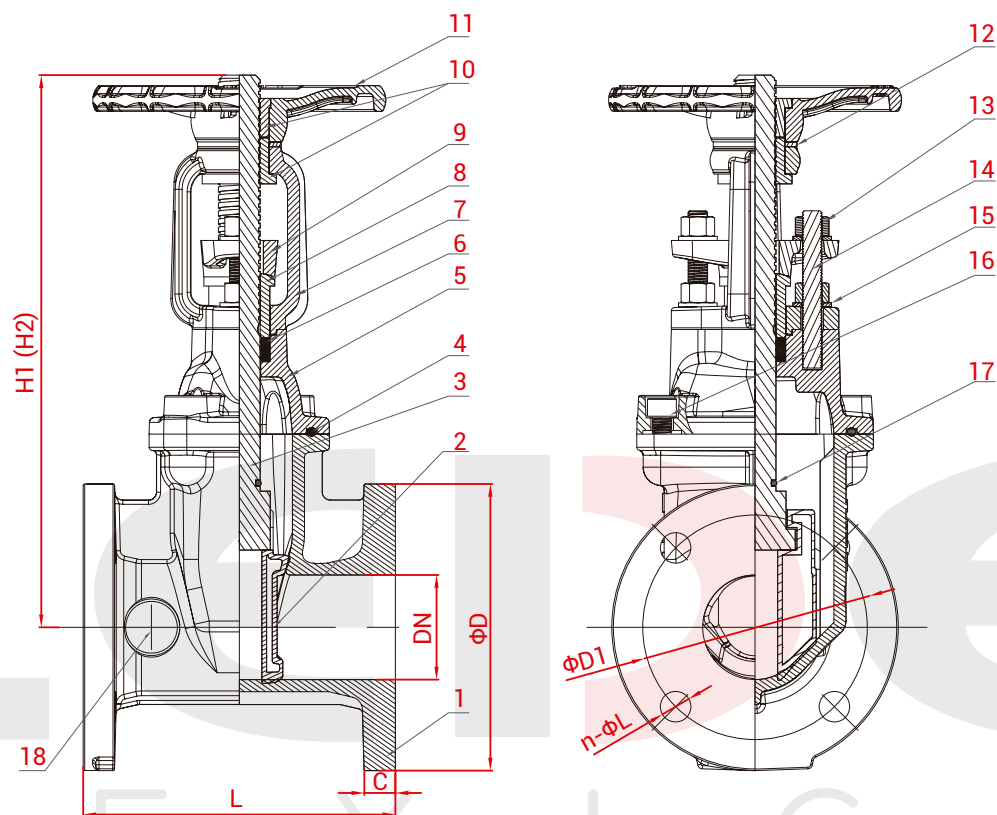

DIMENSIONS

DN		Dimensions(mm)						
Inch	mm	L	H1(Close)	H2(Open)	D	D1	C	n-Φ L
2"	50	178	348	400	152	120.7	16.0	4-Ø19.1
2.5"	65	190	373	440	178	139.7	17.5	4-Ø19.1
3"	80	203	408	490	191	152.4	19.1	4-Ø19.1
4"	100	229	471	573	229	190.5	19.1	8-Ø19.1
5"	125	254	541	665	254	215.9	19.1	8-Ø22.2
6"	150	267	601	755	279	241.3	19.1	8-Ø22.2
8"	200	292	774	975	343	298.5	22.2	8-Ø22.2
10"	250	330	939	1193	406	362.0	23.8	12-Ø25.4
12"	300	356	1065	1370	483	431.8	25.4	12-Ø25.4
14"	350	381	1403	1817	533	476.3	25.4	12-Ø28.6
16"	400	406	1403	1817	597	539.8	25.4	16-Ø28.6
18"	450	432	1788	2308	635	577.9	25.4	16-Ø31.8
20"	500	457	1809	2329	699	635	28.6	20-Ø31.8
24"	600	508	2025	2649	813	749.3	30.1	20-Ø34.9

RESILIENT OS&Y GATE VALVE

Mod. XZ41X | RXZ31X



DESIGN

We reserve the right to change or modify product designs, specifications and/or standard equipment without notice and without incurring obligation.

SALES

Prices and Terms and Conditions of Sale are subject to change without notice.

WARRANTY

From incoming inspection to finished product, quality is checked and monitored in the whole process. Each step of the manufacturing process is carefully documented, regularly reviewed for revision control and updating standard.

Quality procedures are constantly monitored and updated to assure that only the highest and most consistent quality products are supplied to our valued customers.

For more information about warranty policy, please contact us.

