

Control Valve Specification
Prepared By :

Customer : BASF
PO # :
Quote # :
Rev/By : 0.0 / ventas
Application : BUTADIENO

Project : PROYED-26-095
Proj Num :
Q. ID : ventas_WSBN9102PNXT17_77
Alternate :

Valve Tag # : PVK-2621
Page # : 1
P&ID :
Line :
Date / Ver : 31-Aug-2026 / 17,8080

Process Data For Control Valve Selection	1	Pipe Size, Up/Down	1.000 / 1.000				Actuator	51	Actuator Type	FlowAct / Multifunction yoke		
	2	Pipe Sch, Up/Down	80 / 80					52	Size/Stroke Code	503 A		
	3	Allow Noise/Add Attn/Type	90 / 0 /					53	Strk/Strk Limitation	20 mm /		
	4	Process Fluid	BUTADIENO					54	Spr Set/Range	503 A 0.2-1.0 bar		
	5	Design Press./Temp.	/ bar (a) / / °C					55	Fail/Air-To	Close / Open		
	6	Driving Cond.	Cond1	Cond2	Cond3	Cond4		56	Min./Max. Air Sup.	2,41 / 7,01 bar (a)		
	7	Temperature (°C)	10.000					57	Tubing/Fittings	/ / /		
	8	Inlet Press (bar (a))	15.000					58	Pos. Ornt./HW	HVR /		
	9	Outlet Press (bar (a))	14.000					59	Actuator/HW Matl.	Carbon Steel /		
	10	Liq Flow Rate (m³/h)	7.000					60	Spud/Thread/Yoke			
	11	Gas Flow Rate (1000 SCFH)	0					61	Act. Color	White /		
	12	Viscosity (cP)	0.160					62	Model	Logix 500 + Series		
	13	Vapor Press (bar (a))	10.000					63	Model #	522MD+14-W1D100-GM1-0000		
	14	SG-MW	0.621					64	Comm/Sig/Diag	HART / 4 - 20 mA / / Pro		
Calculated Data	15	Max Shutoff / Shutoff Class	14.504 psi / Class IV				Positioner	65	Housing/Shaft	Aluminum, White / Linear-D Shaft		
	16	Available Air Supply / Max. Allow. Supply	3.000 / 7.010 bar (a)					66	Connections	M:5/16;P:1/4N;C:1/2N;V:1/4N		
	17	Valve Function / Amb Temp Min/Max	Throttling / -18/50 °C					67	Action/Hart Version	3-way SA poppet relay / HART 6		
	18	Driving Cond.	Cond1	Cond2	Cond3	Cond4		68	Ind/Dispay/Mnt	None / None / Direct Mounted		
	19	Flow Coeff. (Cv)	6.380					69	Aux Slot 1/2	No Card / No Card		
	20	Est Stroke (% Lift)	80.000					70	Internal switches	None		
	21	Pressure Drop (bar)	1.000					71	Manifold/Pos Tag	Gauge Manifold Aluminum /		
	22	Choke Drop (bar)	5.170					72	Gauges	Nickel:Brass (psi,bar/kPa)		
	23	Noise [IEC] (dBA)	<70					73	Model			
	24	Valve Vel (ft/s)	12.598					74				
	25	Pipe Vel (ft/s)	13.755					75				
	Valve Body Assembly	26	Model / Type / Design / Valve#	FlowTop / Globe / Three-Flange / V752				Pos Ind Sw	76			
		27	Size/Pressure Rating	1.00 / CL 150					77			
		28	Trim # - Cv / Characteristic	20A Cv:11.6 / Mod =%					78			
29		Flow Direction / Stages	Flow Under /				79					
30		Body Matl / Bonnet Matl	A216-WCC (CS) / Carbon Steel				80					
31		End Connection / Sch	Integral Flange /				81					
32		Flange Facing/Face to Face	ANSI B16.5 Form RF / ISA S75.08.01				Solenoid		82	Model/Qty	/	
33		Flange Finish	125 - 250 Ra						83	Cv-Kv/Function	/	
34		Bonnet Type	Standard					84	Volt/Watt/Config	/ /		
35		Balance Type / Guiding	Unbalanced / Post Guided					85	Body/Housing Mtl	/		
36		Plug Matl / Facing	316 SS /					86	Body/Elect Conn	/		
37		Stem Material/Stem Protector	316 SS (Strain hardened level 2) /					87	Port Size/Mtg	/		
38		Seat Ring Matl / Facing	316 SS /					88	Tag/Reset-Override	/ / /		
39		Seat Design/Soft Seat Matl.	Clamped Seat /					Others	89	Air Filter/Mnting	/	
40		Rangeability	50:1				90		Filter-Reg/Mnting	/		
41		Trim Type / Seat Ret. Matl.	Contoured Plug / A351-CF8M (SS)				91		Flow Booster	/		
42		Packing Matl / Style / Vac / Cert	Braided PTFE / Single / /				92		Thr Chk Valve			
43		Packing Design/Live Loaded	External /				93		Quick Exhaust			
44		Bonnet Port Type					94		Supply Tubing			
45		Bellows Type / Material	/				95		Lockup/Mnting	/		
46		Jacket / Connections	/				96		Plate ID			
47		Body Bolting Material	B7-2H Zinc Plated				97		Plate Type			
48		Gaskets	Graphite				98		Packaging	Standard		
49		Packing Follower Material					99		Positioner Interface			
50		P/B Seal Matl.					00		Wiring Conn. Type			
Customer Spec		T1						Special Req	01	Rad. Exm/Mat Regu	/	
		T2							02	Drawings		
		T3							03	Seat Leak Test	FCI 70-2 Class IV (Air)	
		T4							04	Final test certificates		
		01	Certification/Approval Type	/					05	PMI/Weld Req	/ ASME BPVC Section IX	
		02	Class or Gas Group	No Cert Req					06	Doc. / Cleaning	/	
		03	Division or Zone	No Cert Req					07	HydroTest/App.	/	
		04	Group	No Cert Req					08	CMTR/Mat Cert.	/	
		05	Ingress / Temperature	NEMA 3 /					09	Paint	Standard /	
	06	NACE / Nuclear / Copper Restriction	NA / NA / None				10		Diagnostic Test			
	07	SIL Viv-Act / Pos					11		Cust. Insp/Witn.	No / No		
	08	Oxygen	NA				12					
							13					
							14		Flow Testing			
						S1						
						S2						

Sourcing Restrictions :
Quoted Delivery (Weeks) :
Factory Quote :

Line # : Remarks :

DB Rev - 192 : 31-Aug-2026 : ID = ventas WSBN9102PNXT17 77

Price: USD 0

Quantity: 1

Total: USD CF



Detail Information
Prepared By :


Customer : BASF
PO # :
Quote # :
Rev/By : 0.0 / ventas
Application : BUTADIENO

Project : PROYED-26-095
Proj Num :
Q. ID : ventas_WSBN9102PNXT17_77
Alternate :

Valve Tag # : PVK-2621
Page # : 1
P&ID :
Line :
Date / Ver : 31-Aug-2026 / 17,8080

1,00 in (Trim: 20A Cv:11.6) CL 150 FlowTop Contoured Plug Globe

Cond1											
Process Data											
Temp	(°C)	10.000	---	---	---	---	---	---	---	---	---
P1	(bar (a))	15.000	---	---	---	---	---	---	---	---	---
P2	(bar (a))	14.000	---	---	---	---	---	---	---	---	---
Liq Flow	(m³/h)	7.000	---	---	---	---	---	---	---	---	---
Gas Flow	(1000 SCFH)	---	---	---	---	---	---	---	---	---	---
Visc	(cP)	0.160	---	---	---	---	---	---	---	---	---
VP	(bar (a))	10.000	---	---	---	---	---	---	---	---	---
DP	(ft/s)	1.000	---	---	---	---	---	---	---	---	---
DpC	(bar)	5.170	---	---	---	---	---	---	---	---	---
Vel	(ft/s)	12.598	---	---	---	---	---	---	---	---	---
Pipe Vel	(ft/s)	13.755	---	---	---	---	---	---	---	---	---
Noise	(dBA)	< 70.0	---	---	---	---	---	---	---	---	---
Flow Cap	(Cv)	6.380	---	---	---	---	---	---	---	---	---
Stroke	(% Lift)	80	---	---	---	---	---	---	---	---	---
Info	()	---	---	---	---	---	---	---	---	---	---
Detailed Miscellaneous Information											
FP		1.000	---	---	---	---	---	---	---	---	---
FL		0.941	---	---	---	---	---	---	---	---	---
FR		1.000	---	---	---	---	---	---	---	---	---
Sg		0.621	---	---	---	---	---	---	---	---	---
K		---	---	---	---	---	---	---	---	---	---
Xt		---	---	---	---	---	---	---	---	---	---
Z		---	---	---	---	---	---	---	---	---	---
FD		---	---	---	---	---	---	---	---	---	---
MWT		---	---	---	---	---	---	---	---	---	---
Detailed Cavitation (Sigma) Information											
Sigma		5.000	---	---	---	---	---	---	---	---	---
Sigma MR		1.934	---	---	---	---	---	---	---	---	---
PSE		0.965	---	---	---	---	---	---	---	---	---
SSE		0.888	---	---	---	---	---	---	---	---	---
Sigma V		1.693	---	---	---	---	---	---	---	---	---
Sigma P		1.692	---	---	---	---	---	---	---	---	---

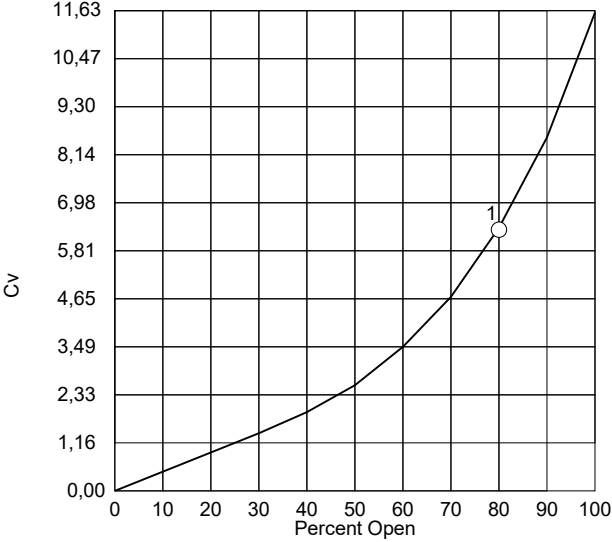

Fluid: BUTADIENO
Type: Simple
Owner: EVERYONE Fluid List: BUTADIENO

Specific Gravity:: 0.621

Flow Direction : Flow Under
Trim Characteristic : Mod =%
Balance Type: Unbalanced
Trim Type : Contoured Plug

DB Rev - 192 : 31-Aug-2026