

### AWWA C515 Resilient seated OS&Y gate valve-flange end


Model No. Z41X-03



| Name of parts | Material                            |
|---------------|-------------------------------------|
| Body          | Ductile iron                        |
| Wedg          | Ductile iron+EPDM                   |
| Stem nut      | Bronze                              |
| Stem          | SS431 or SS304, SS316, bronze       |
| Bonnet        | Ductile iron                        |
| Bonnet Gasket | EPDM                                |
| Sealing Ring  | EPDM                                |
| Yoke          | Ductile iron                        |
| Sliding disc  | Bronze                              |
| Screw         | Carbon steel with hot galvanization |
| O-rings       | EPDM                                |
| Handwheel     | Ductile iron                        |

#### Technical data >

- Sizes: 2" ~ 12"
- Working pressure: 175PSI, 300PSI
- Valve standard: AWWA C515
- Flange standard: ASME-B16.1 Class125
- Temperature range: 0 ~ 80 C

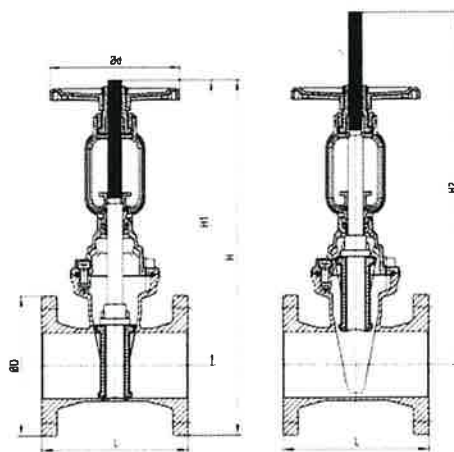

| Dimensions |      | Pressure rating | Size (mm) |     |        |       |        |     |
|------------|------|-----------------|-----------|-----|--------|-------|--------|-----|
| DN         | inch |                 | ΦD        | L   | H1     | H2    | H      | Φd  |
| 50         | 2    | 175             | 152       | 178 | 358.5  | 420.5 | 434.5  | 203 |
|            |      | 300             |           |     |        |       |        |     |
| 65         | 2.5  | 175             | 178       | 190 | 359.5  | 429.5 | 448.5  | 203 |
|            |      | 300             |           |     |        |       |        |     |
| 80         | 3    | 175             | 191       | 203 | 378    | 462   | 473.5  | 203 |
|            |      | 300             |           |     |        |       |        |     |
| 100        | 4    | 175             | 229       | 229 | 449.5  | 553   | 564    | 203 |
|            |      | 300             |           |     |        |       |        |     |
| 125        | 5    | 175             | 254       | 254 | 549.5  | 677   | 676.5  | 300 |
|            |      | 300             |           |     |        |       |        |     |
| 150        | 6    | 175             | 279       | 267 | 591.5  | 747   | 731    | 300 |
|            |      | 300             |           |     |        |       |        |     |
| 200        | 8    | 175             | 343       | 292 | 735.5  | 938   | 907    | 330 |
|            |      | 300             |           |     |        |       |        |     |
| 250        | 10   | 175             | 406       | 330 | 900.5  | 1161  | 1103.5 | 406 |
|            |      | 300             |           |     |        |       |        |     |
| 300        | 12   | 175             | 483       | 356 | 1045.5 | 1353  | 1287   | 406 |
|            |      | 300             |           |     |        |       |        |     |