Big Poppa Mining Command Center

Project showcase






A mining rig with an engineering discipline

Monitoring, bounded execution and a deliberate safety boundary

Evidence edition • 2 November 2026

Stage 1B screenshots are simulated. Later telemetry and safety evidence are identified separately.


The idea behind the interface

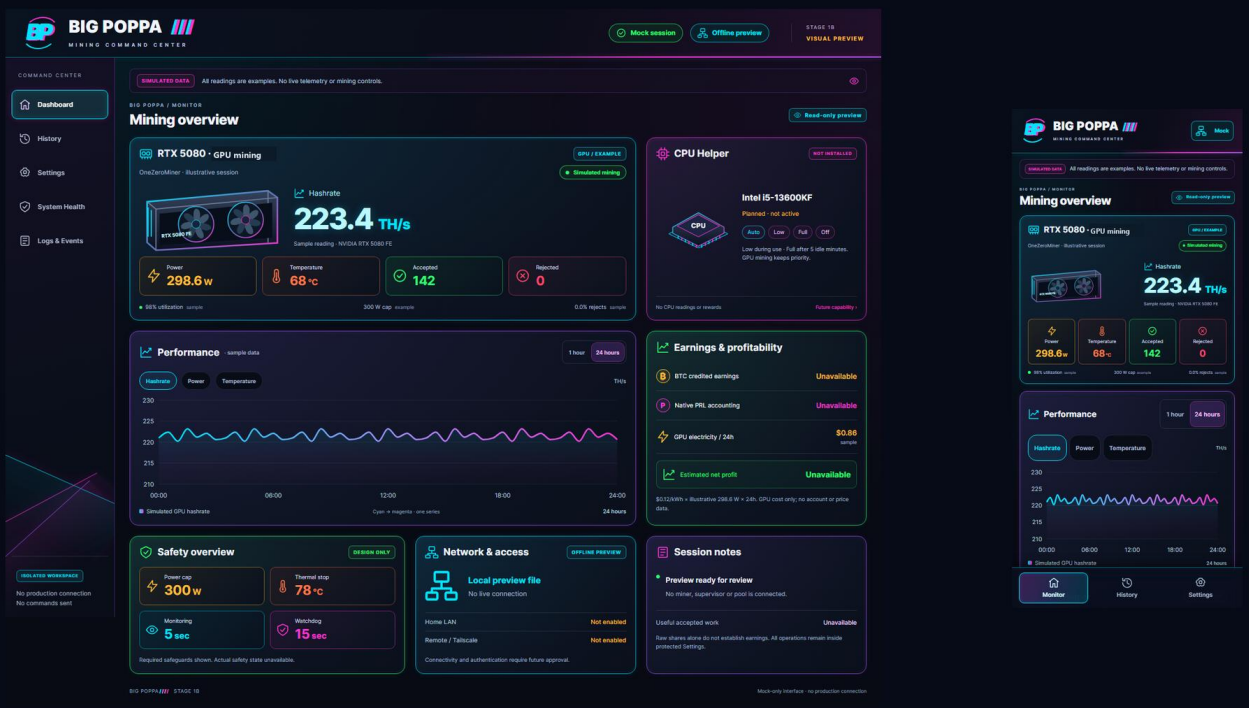

Big Poppa brings mining state, GPU readings and safety evidence into one understandable monitoring environment. It is for an owner who needs to distinguish a running process, a productive miner, a stale dashboard and a confirmed safe stop.

The strongest engineering story is the separation of responsibilities: the miner performs work, an existing supervisor owns the workload and protections, and a new read-only presentation layer interprets selected telemetry. A colorful dashboard does not receive mining authority merely because it can display a button.

The engineering underneath

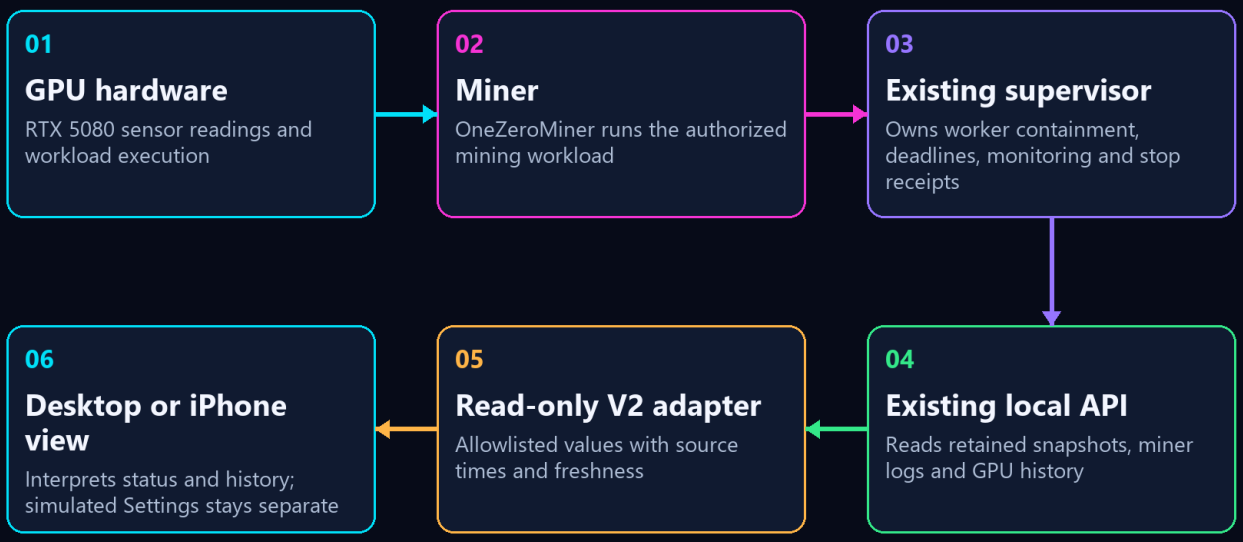

Arrow order simplifies the data path. Control and safety authority remain separate from read-only presentation.

• Recognize SIMULATED DATA in Stage 1B. For a later connected preview, inspect source times and run phase before using a value. Open the correct checkpoint

• Confirm GPU, miner identity and whether the run is mining, preparing, stopping, stopped, interrupted or unknown. Read identity and current state

• Compare hashrate, accepted/rejected counters, temperature, power draw, cap and utilization with their units and ages. Review throughput and conditions

A measured run and a better test boundary

A local owner-approved validation report records a supervised 15-minute run: 212.5 TH/s mean, 282.2 W mean GPU draw, 68 degrees C peak and 19 accepted shares. The planned stop completed, and independent readback agreed with restored power limits. These are dated results, not the mock dashboard figures or an optimization gain.

A recorder-admission correction then exposed a wrong native structure offset that synthetic tests missed. The revised check compared native layout with Windows APIs and recorded agreement across 361 processes. The lesson is to test the real boundary, not merely the fixture.

These achievements belong to the existing mining environment. The protected persistent V2 dashboard remains a separate, unfinished milestone.

Development status and next milestones

Stage 1B is the accepted visual checkpoint. Stage 2 adds read-only source data; later private preview and startup candidates exist. The Stage 4C report says the protected persistent V2 runtime is not installed and is not ready for activation. The existing GPU supervisor remains the safety authority.

• Resolve artifact/runtime provenance, positive preflight and dependency closure before protected preparation.

• Verify a bounded task-token lifecycle and telemetry continuity before boot or logoff claims.

• Reuse one existing GPU supervisor through a future authenticated control adapter.

• Qualify a CPU engine separately before coordination or profitability automation.

• Require measured hashrate, accepted work, temperature and attributable energy baselines before optimization claims.

Built with AI directed by a builder

Daniel directed the product objectives, reviewed the visual direction and refined the work through feedback. The repositories preserve AI-assisted implementation, tests, checkpoints and explicit gates. This portfolio credits product direction and technical investigation without claiming Daniel personally hand-coded every component.

Recorded owner feedback included real iPhone preview testing. The project makes a persuasive engineering case through telemetry provenance, bounded runtime work and a clear safety boundary.

• A mining rig with an engineering discipline.

• Current status: approved visual UI; later read-only telemetry; persistent V2 and real controls pending.

• Detailed technical documentation is retained privately. This portfolio presents a reviewed summary.

• Evidence edition • 2 November 2026