

AT1521

## **Outline Dimensions**

## **PCB Land Pattern**

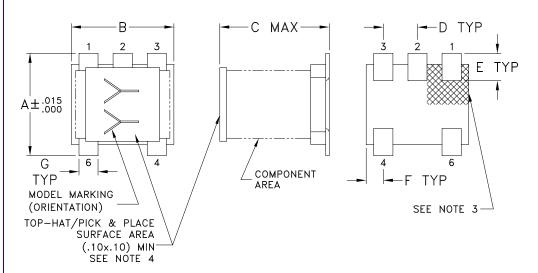



Suggested Layout, Tolerance to be within ±.002

CASE #	A	В	С	D	Е	F	G	Н	J	K	WT. GRAMS
AT1521	.150 (3.81)	.150 (3.81)	.160 (4.06)	.050 (1.27)	.040 (1.02)	.025 (.64)	.028 (.71)	.065 (1.65)	.190 (4.83)	.030 (.76)	.15

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm .01$ ; 3Pl.  $\pm .005$ 

## **Notes:**

- 1. Case material: Plastic.
- 2. Termination finish:

For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.

- 3. Lead#1 identifier shall be located in the cross-hatched area shown, on bottom view. Identifier may be either a molded or marked feature.
  - 4. Top-Hat total thickness: .013 inches MAX.



INTERNET http://www.minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified