


Processing:

Cutting	
Stripping	
Partial stripping	
Crimping	
Seal insertion	
Doubling unit	
Sleeve insertion	
Twisting and tinning	
Inkjet printing	
Hot printing	
Split cycle for close barrel	
Intermediate stripping	




Fully automatic crimping machine of the latest generation. Given its wide arrangement can accommodate up to six processing stations. Equipped with the most advanced mechanical and electronic technologies, it is versatile for multiple processes. Very simple and intuitive thanks to a user schematic interface.



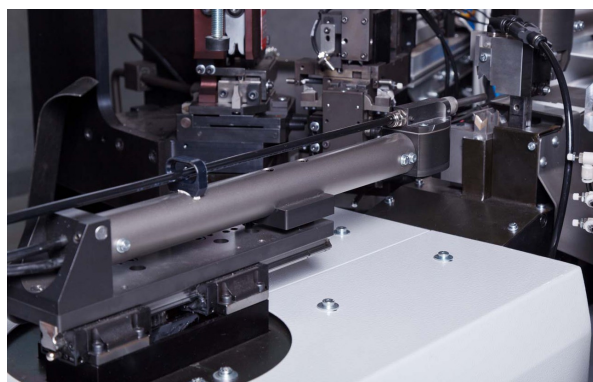

Key features:

- Equipment up to six processing stations
- Highly ergonomic and easy to maintain
- Electronic crimp height adjustment (optional)
- Crimping height measurement integrated (optional)
- Pull test device integrated (optional)
- Integrated quality control CFA (optional)
- Simple user interface and intuitive
- Ample opportunity to save parameters
- Power cable used indiscriminately roller or belt.

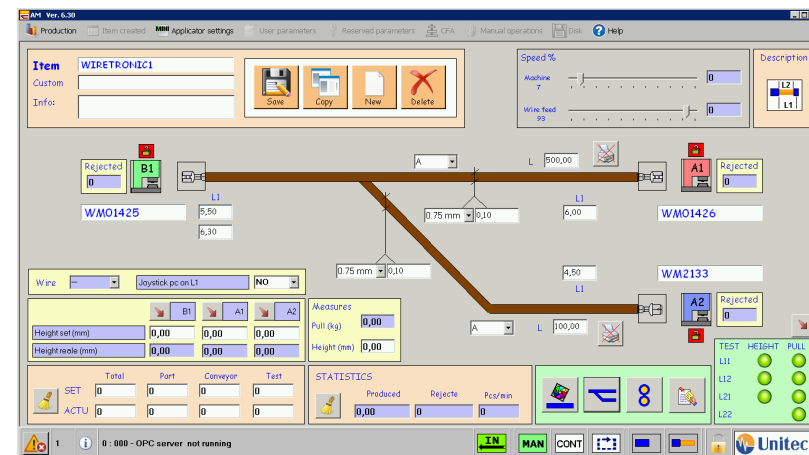

Technical data:

- Wire cross section: 013 – 6mmq (10mmq optional)
 Wire length: 42mm crimping only one side
 55mm crimping both side
 30mm (optional)
 Strip length: 0,1 – 15mm lato 1
 0,1 – 30mm lato 1 (optional)
 0,1 – 15mm lato 2
 0,1 – 30mm lato 2 (optional)
 Speed feeder: 12m/s
 Power supply: 400V 50/60Hz 10kVA
 Air supply: 6-7bar
 Weight: 1200Kg
 Noise: 75dB
 Dimensions: 3700x1800x2000mm

