


Install TSP OpenVINO Development Environment on PC with ISO Image

■ Build a Bootup Disk

1. Download and install the UltraISO tool.


The UltraISO tool download link: http://www.ezbsystems.com/ultraiso/download.htm

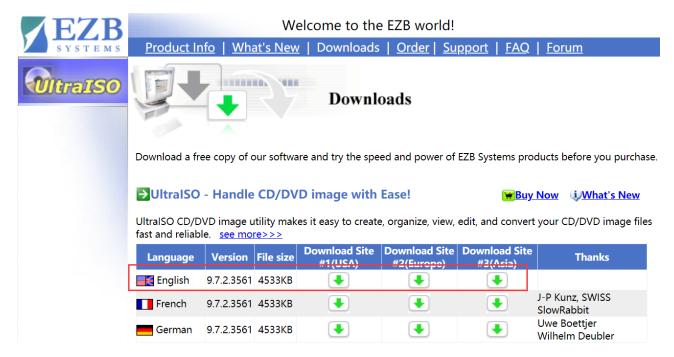


- 2. Download the .iso image. (Here is the download link: https://www.terasic.com.tw/cgi-bin/page/archive.pl?Language=English&CategoryNo=167&No=1159&PartNo=4)
- 3. Plug a USB flash drive on the PC.
- 4. Open the UltraISO tool, choose the Trial Version by clicking on the **Continue to Try...** button.





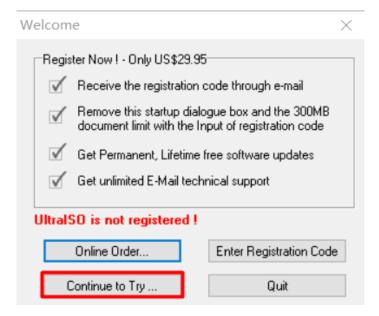


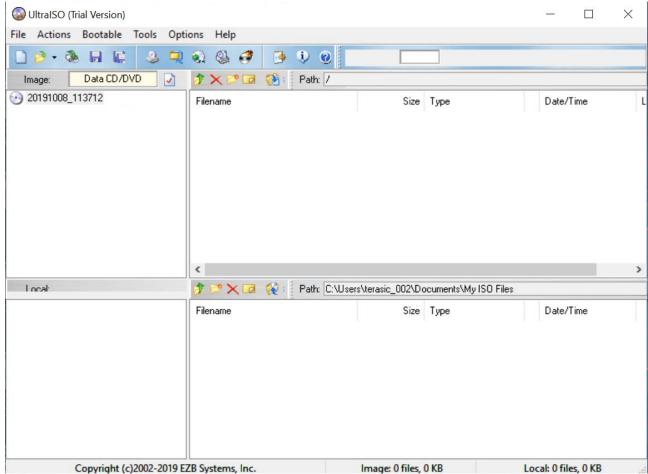

5. Choose **File→Open** to open the iso image.






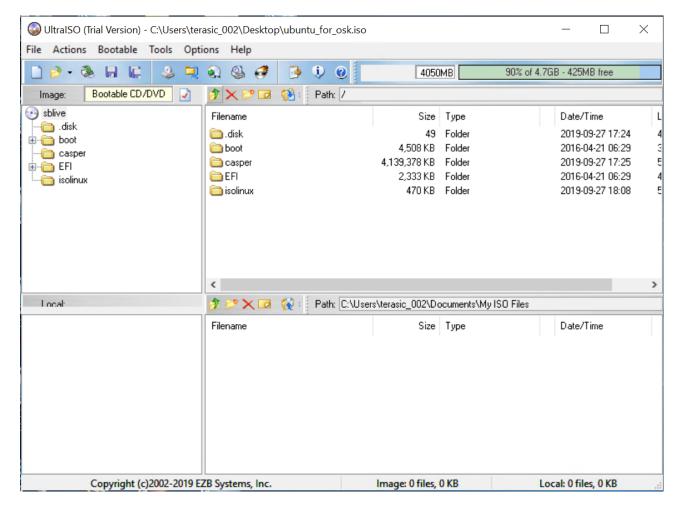


6. Build a disk image, click menu Bootable->Write Disk Image.



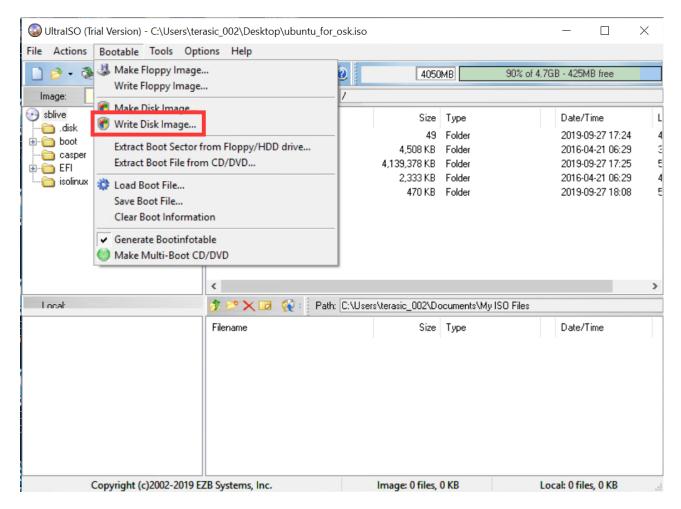

The Write Disk Image window:




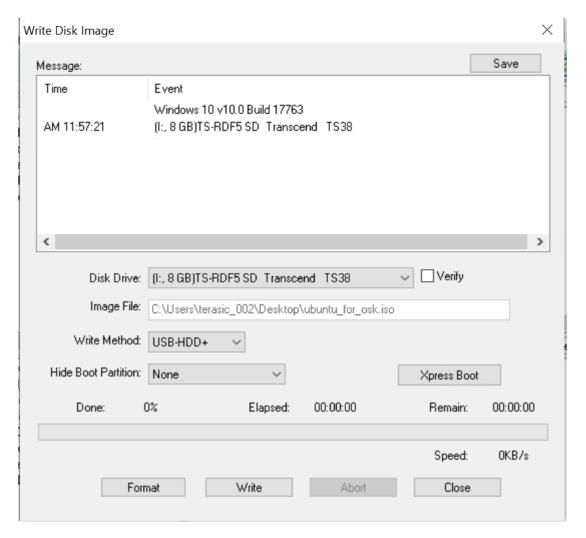


7. Choose the Disk Drive, start to write the image by clicking the **Write** button.

5



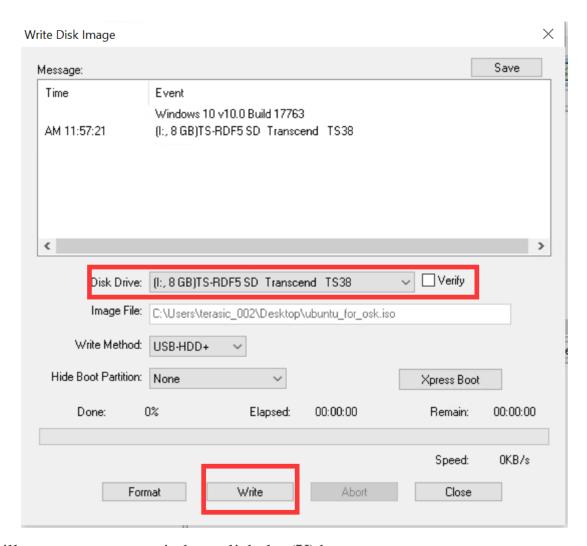


It will pop up a prompt window, click the (Y) button.

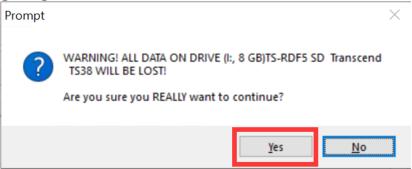


8. Start to write the image, and wait until it completes.



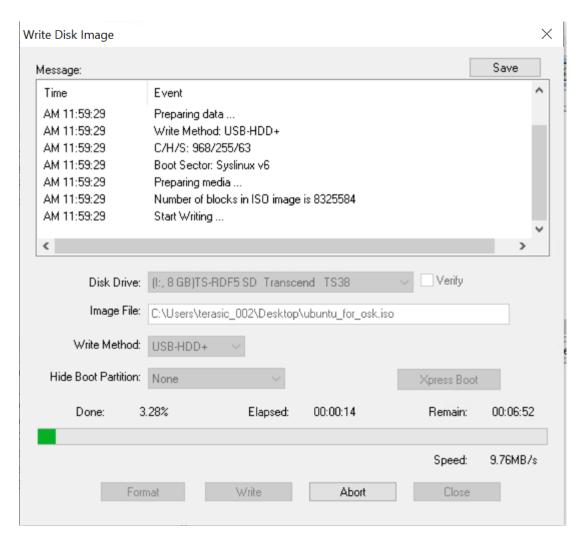

9. The write operation is completed, then, close the window.




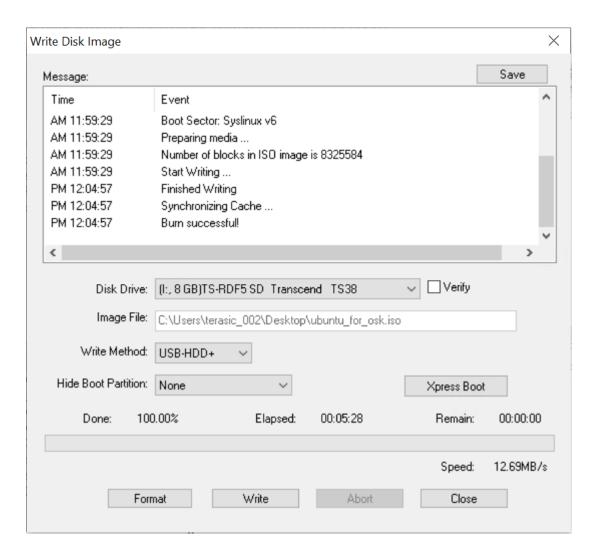


■ Install ISO Image on PC

- 1. Insert the bootup disk to the PC USB port, power up the PC.
- 2. When entering the bios interface, select the U disk for bootup option.
- 3. In the figure as shown below, choose **Boot system installer**.



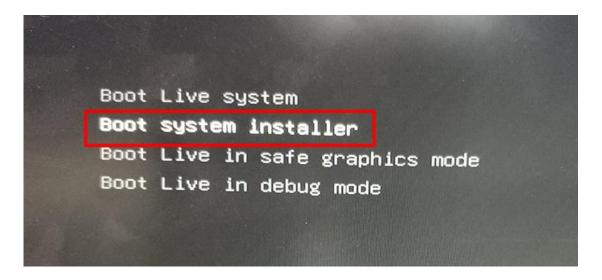


4. Type the required information in the next window (shown as below).

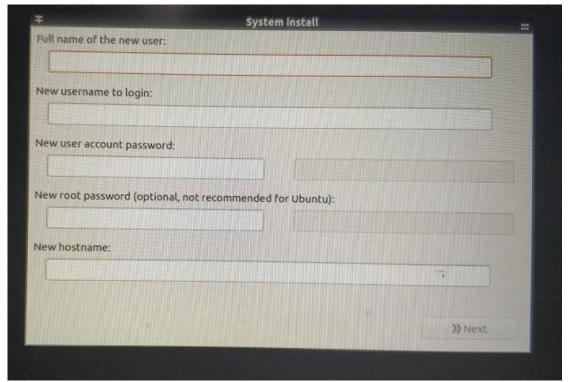


ISO for TSP



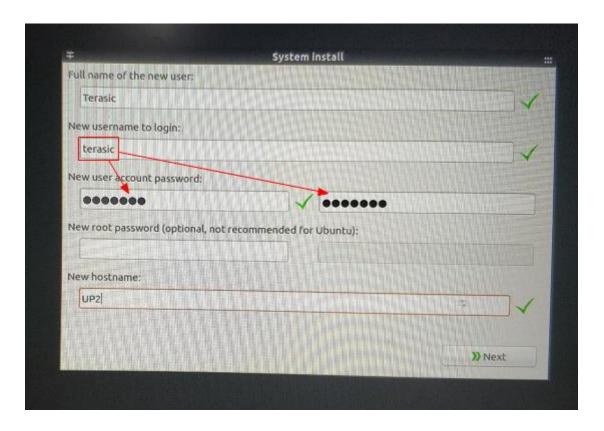


5. Click >>Next to next window, then check the /dev/mmcblk0, click Unmount button, as shown in figure below.

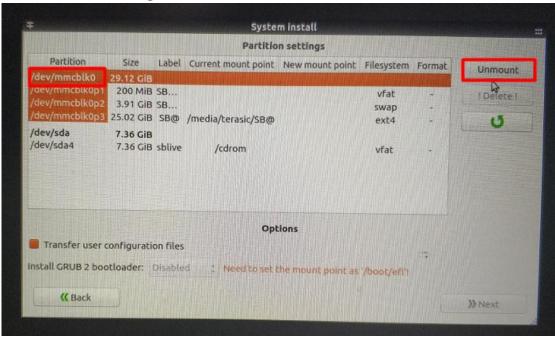

6. Choose /dev/mmcblk0, click **Delete** button, as shown in figure below.





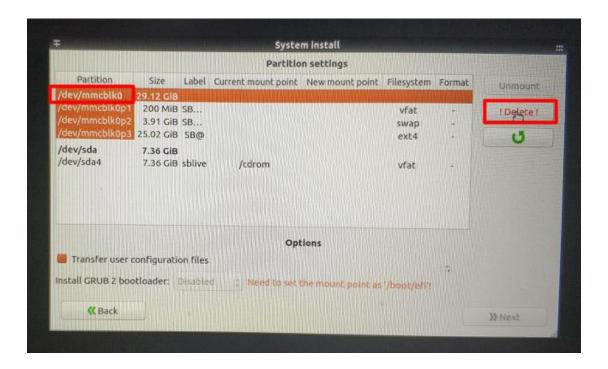

7. Then, the window looks like the figure below.




8. As shown in figure below, choose /dev/mmcblk0?, create a 200MiB partition.




ISO for TSP



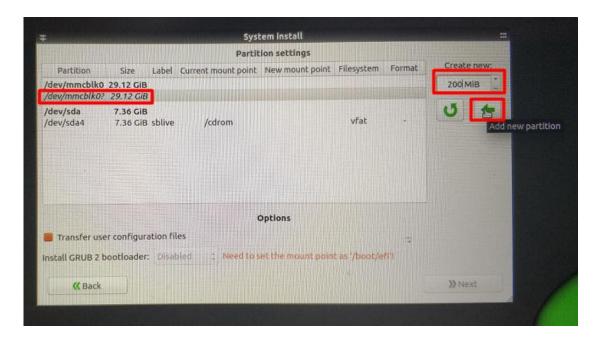



After the allocation operation, the window looks like the figure below:

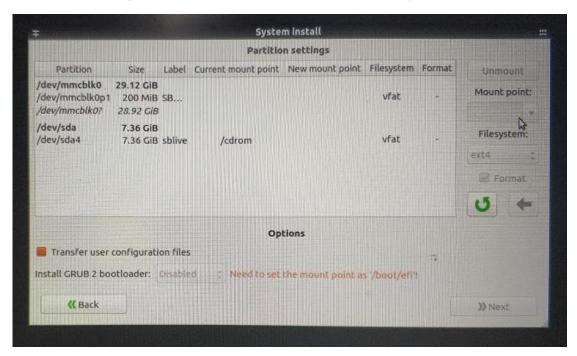

9. Allocate two more partitions with the same way, one is 4096MiB and the other is the rest of the disk place, as shown in figure below.




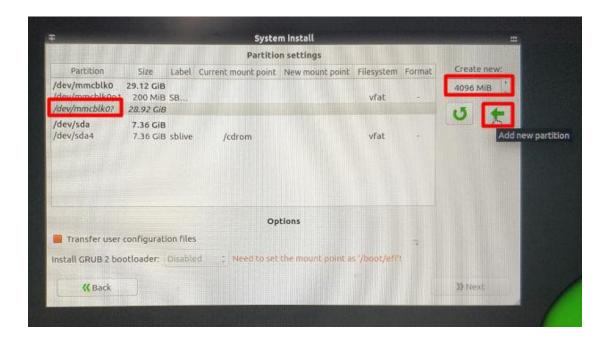

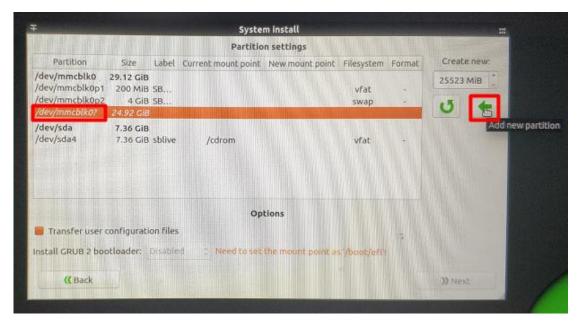


10. As shown in figure below, the partition allocation is completed.



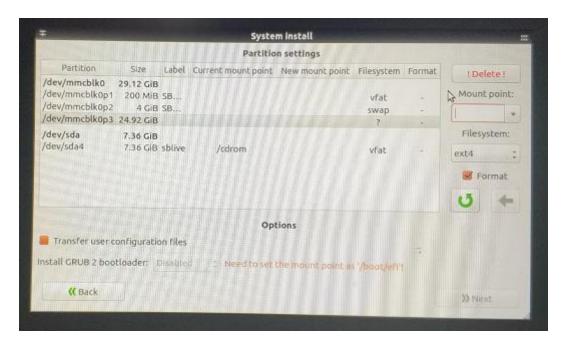


11. Format the /dev/mmcblk0p3 partition to ext4, set the Mount point as /, as shown in figure below.

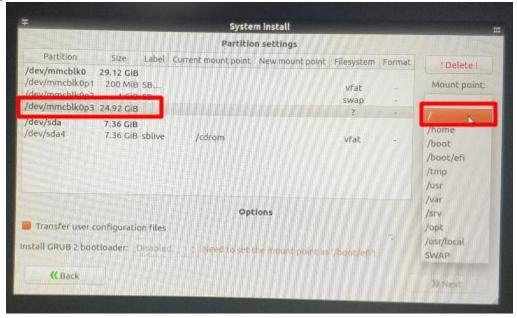


ISO for TSP



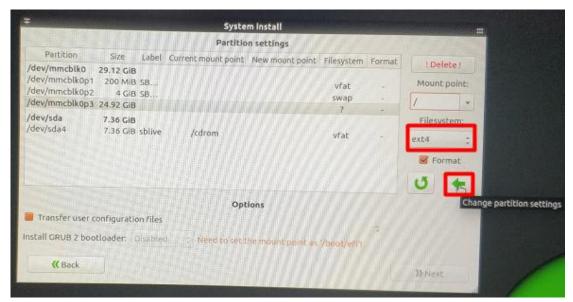


After the formatting, the window looks like as figure below:

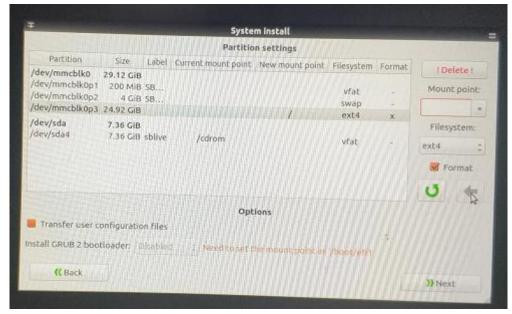


12. Set the /dev/mmcblk0p2 mount point to swap, as shown in figure below.



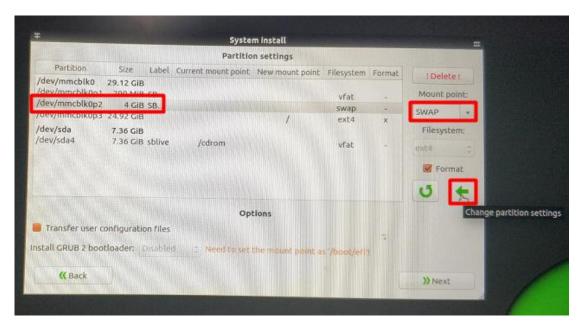


After the formatting, the window looks like as figure below:

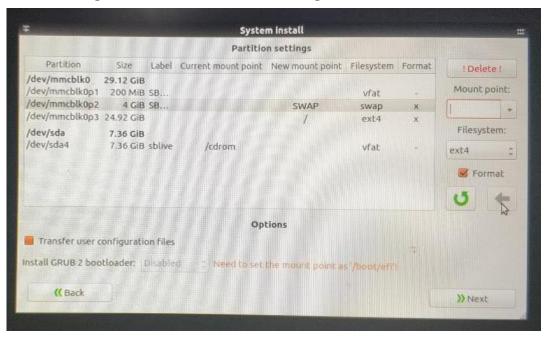


13. Set the /dev/mmcblk0p1 mount point to /boot/efi, as shown in figure below.



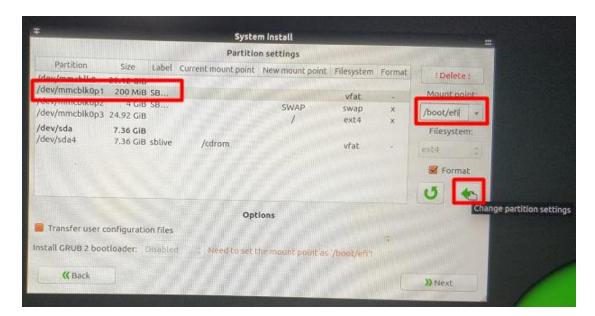


When the setting is completed, the window looks like as figure below:

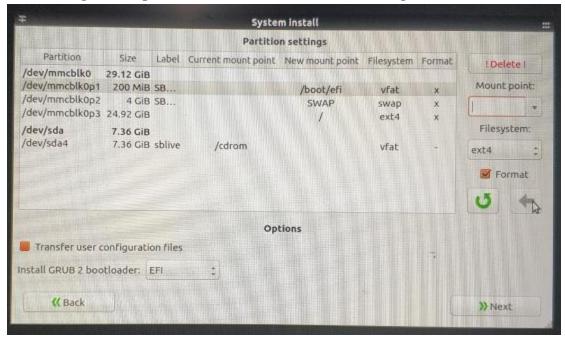


14. Check the **Transfer user configuration files** box, then click **Next** button.




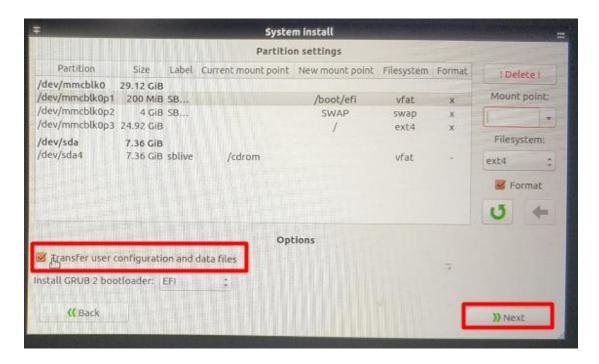


15. It popups a dialog window, click **Start** button, as shown in figure below.

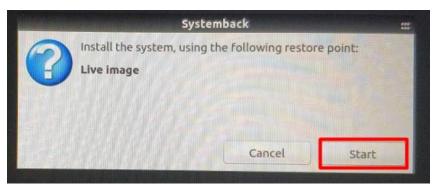


16. Wait for the installation process, then, restart the system after the installation.

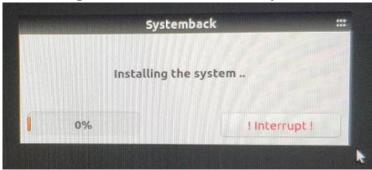



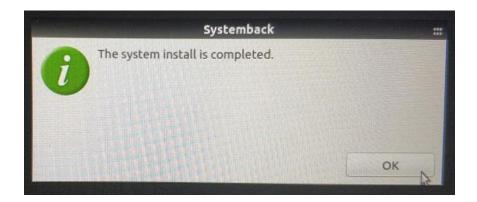

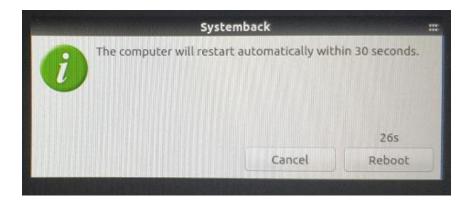

Note: after the installation, it will be a little slow for the first time to enter the system, which is a normal phenomenon.

Revision History

Version	Change Log
V1.0	Initial Version
V1.1	Add supporting GT device

Copyright Statement

Copyright © Terasic Inc. All Rights Reserved.



