hayro PR #1770: CCITT Fax Lenient Recovery Reproducer

Synthetic bitstreams from hayro-ccitt & PDFium FaxModuleTest unit tests (compare hayro main vs. PR #1770 / Chrome PDFium)

1. /EncodedByteAlign true Without Inter-Row Zero Padding

Lenient mode peeks bits before byte boundary and disables alignment if non-zero (instead of eating 1-7 bits of row 1).

1A. Unit Test G4 4x2 ([0x85])

`K=-1 EncodedByteAlign=true (lib.rs)`

1B. hayro edges_g3_1d (48x26)

`K=0 EncodedByteAlign=true (recovery.rs)`

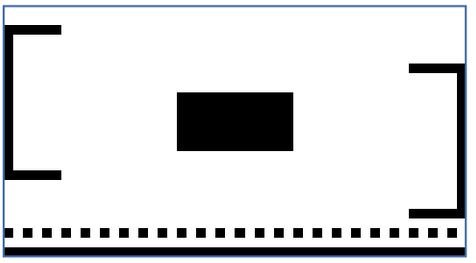

1C. PDFium kFax1DData (44x38)

`K=0 EncodedByteAlign=true (FaxModuleTest)`

1D. hayro g3_2d (211x96)

`K=1 EncodedByteAlign=true (recovery.rs)`

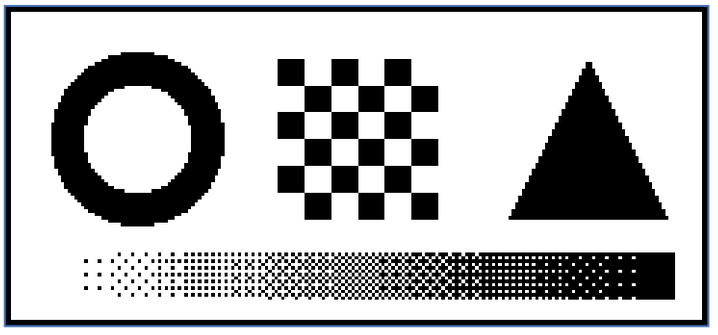

1E. hayro g4 (211x96)

`K=-1 EncodedByteAlign=true (recovery.rs)`

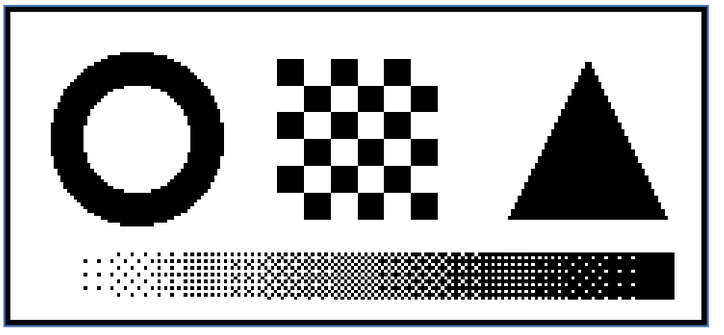

1F. PDFium kFaxG4Data (548x177)

`K=-1 EncodedByteAlign=true EndOfBlock=false (FaxModuleTest)`

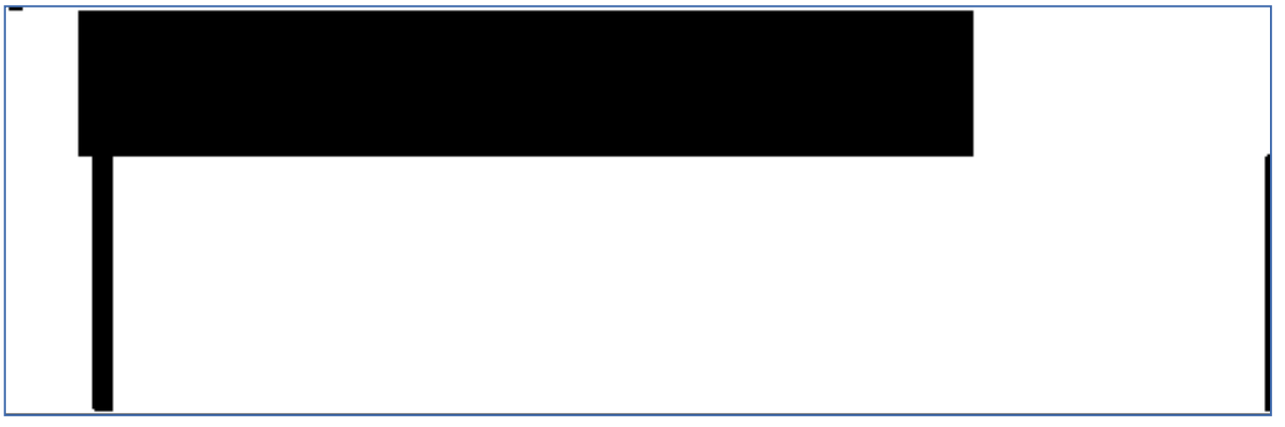

2. Truncated / Corrupted Group 4 (MMR) Scanline Mid-Row

Lenient mode white-pads and flushes the partially decoded scanline (pixels_decoded > 0) before returning the error.

2A. Unit Test Truncated G4 (4x2)

`g4_truncated_line.bin [82 40 00] -> row 1: [W, B, B, W]`

2B. edges_g4 Truncated Mid-Row 23 (48x24)

`Truncated after 11 dots on bottom dotted row -> half-row preserved`

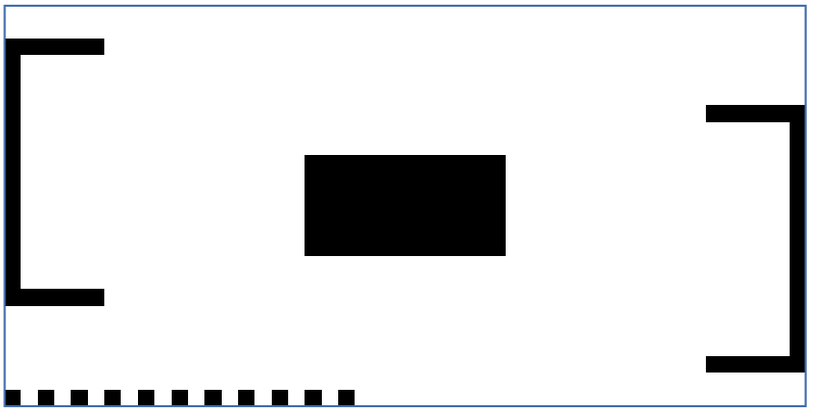

Expected with PR #1770 & Chrome/PDFium: 1A bottom-right black; 1B-1F intact figures; 2A bottom-middle black; 2B 11 bottom-left dots.