

KET3


Ahmed




, 2025

RGB-LEDs



Dimensions: [mm]

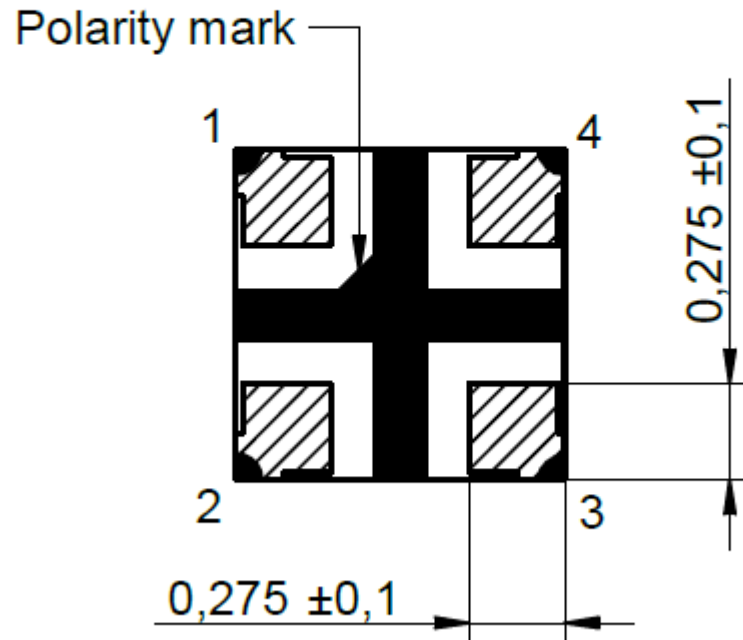

Recommended Land Pattern: [mm]


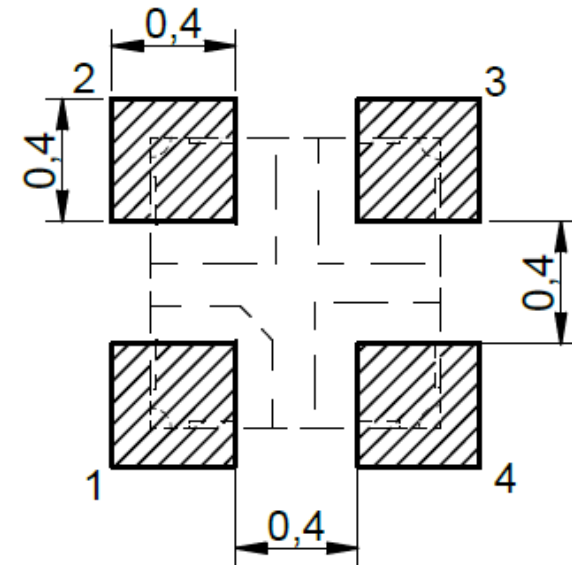


PCB

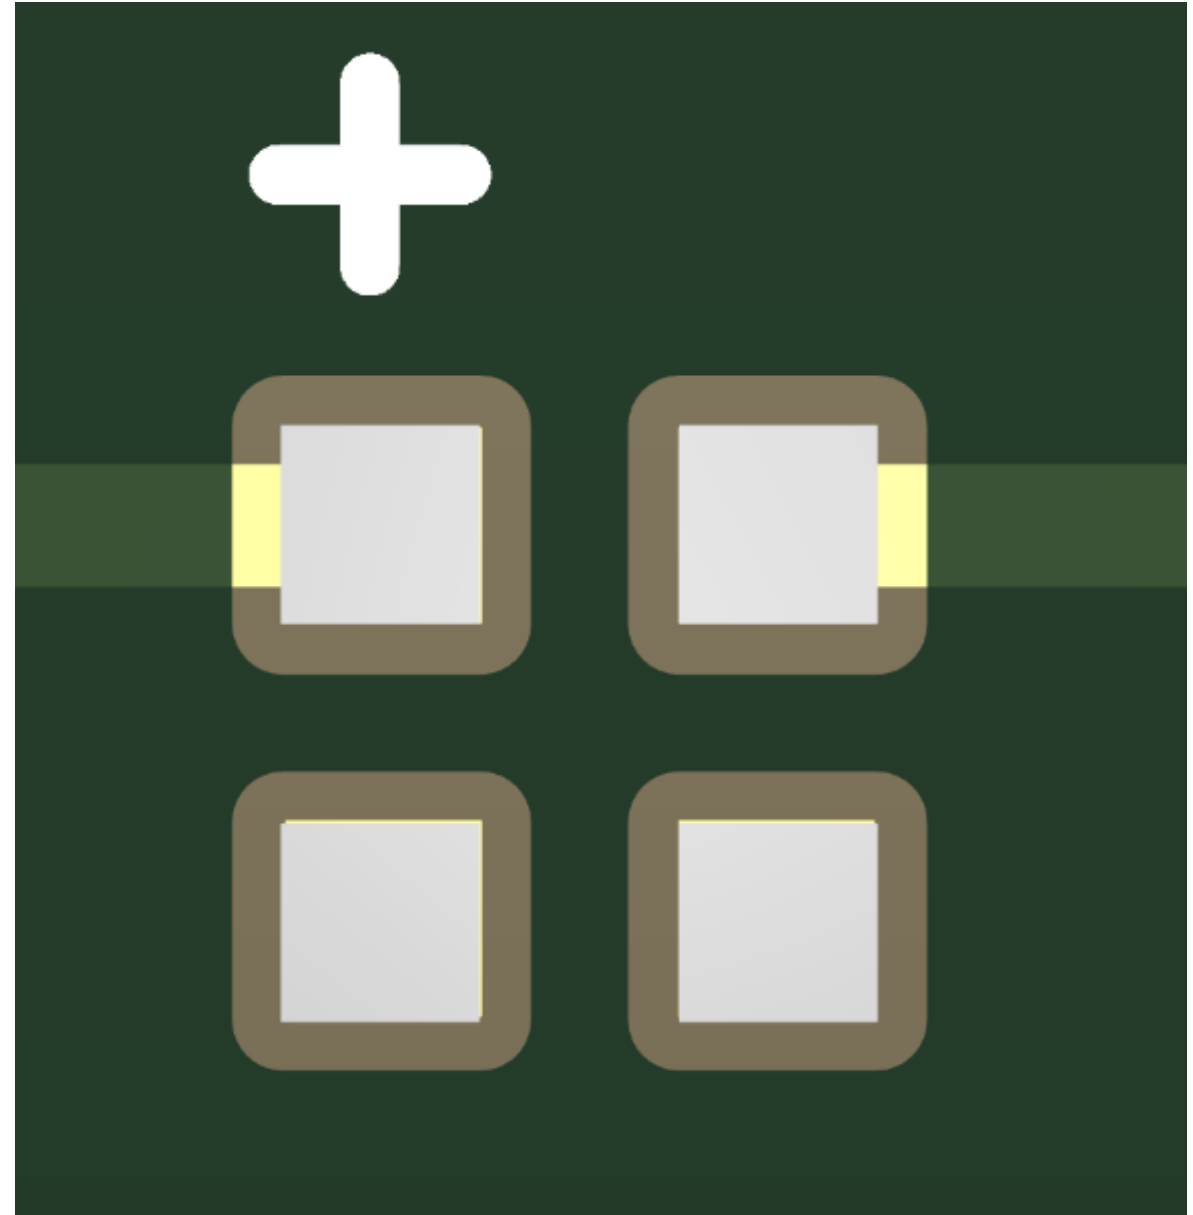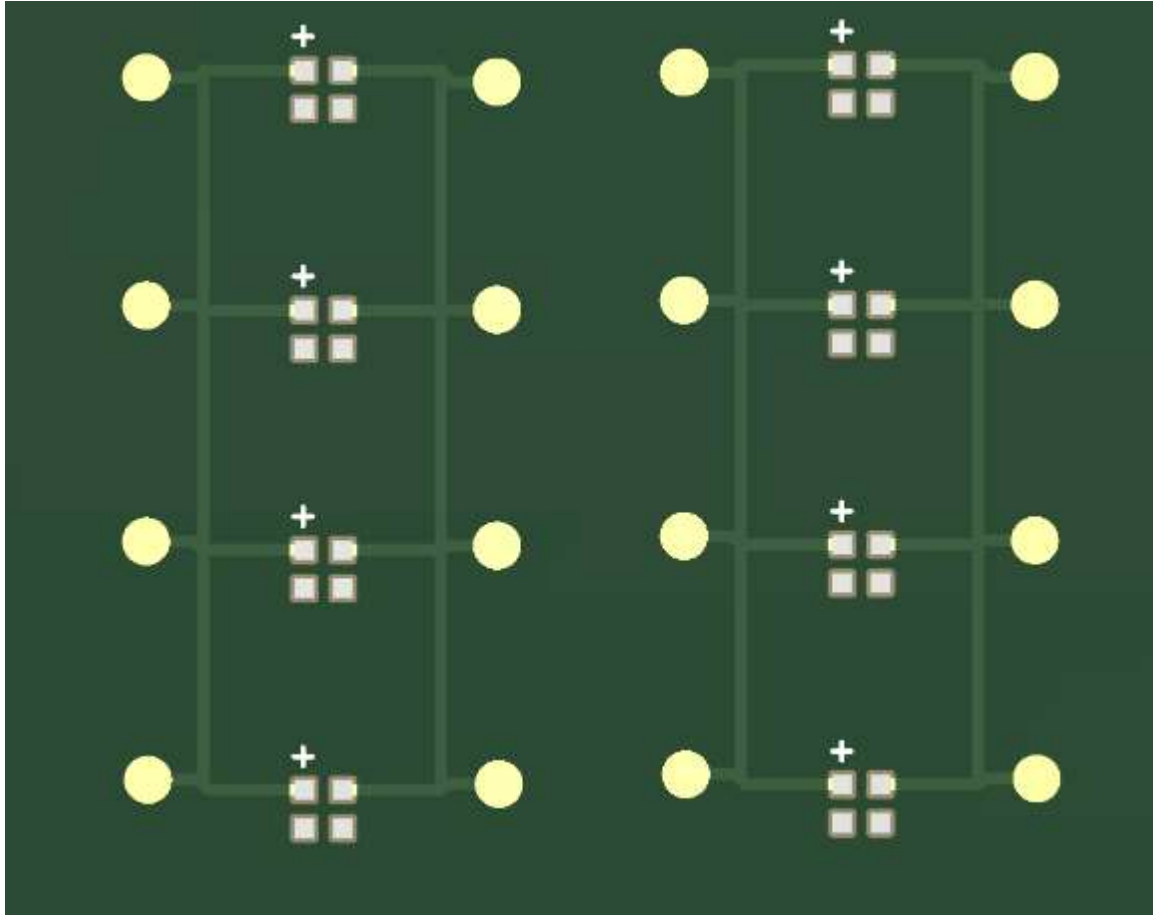




Setup

Tape, PCB, stencil mask (100um),
plastic mouth spatula, razor blade

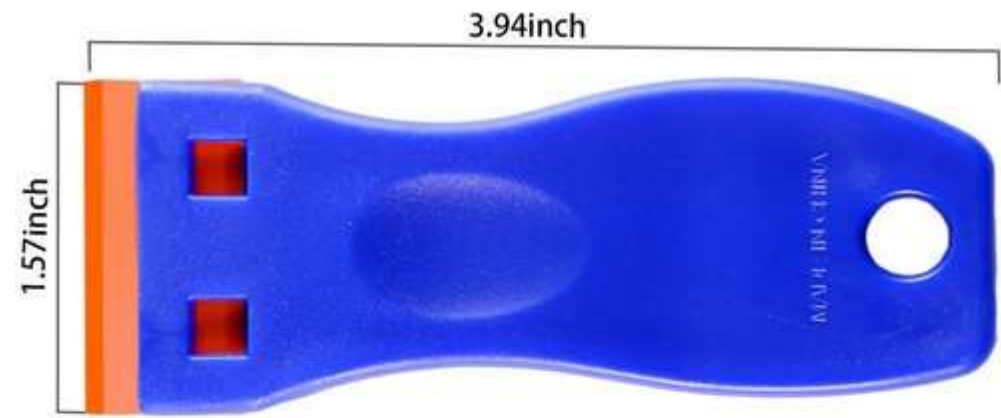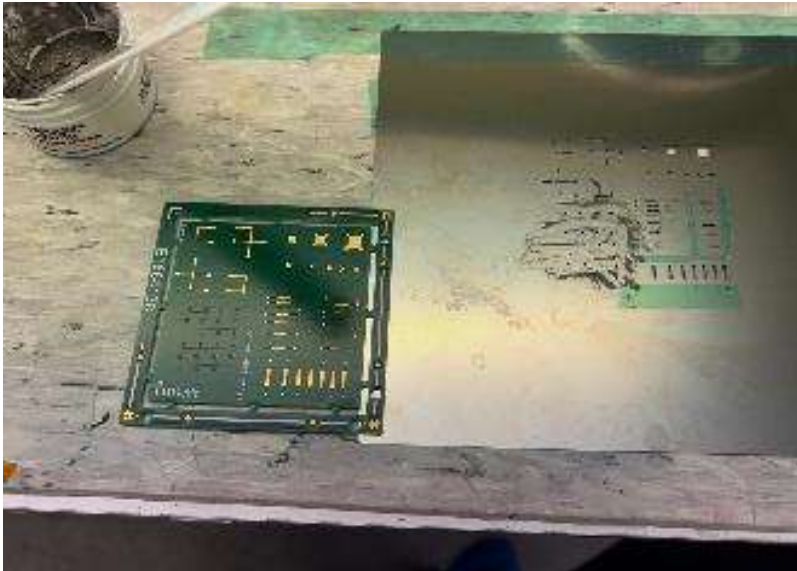

Setup


Tape, PCB, stencil mask (100um),
plastic spatula, razor blade

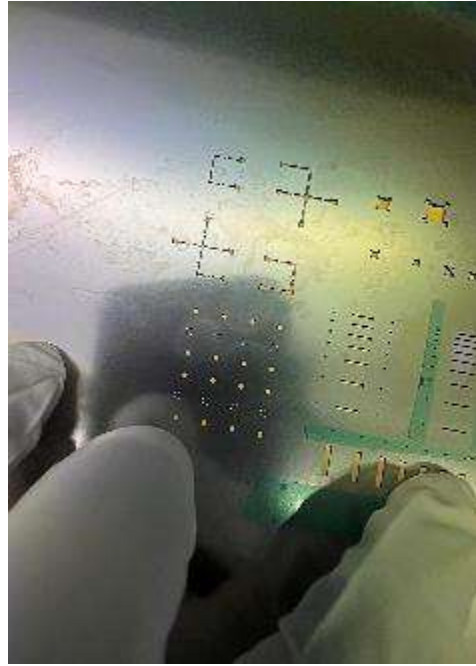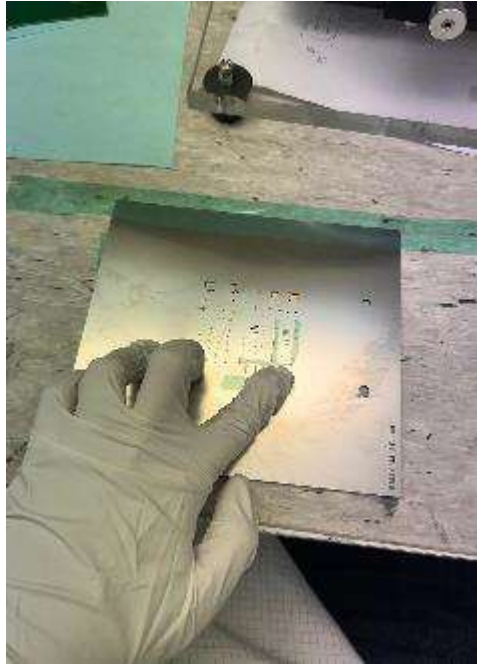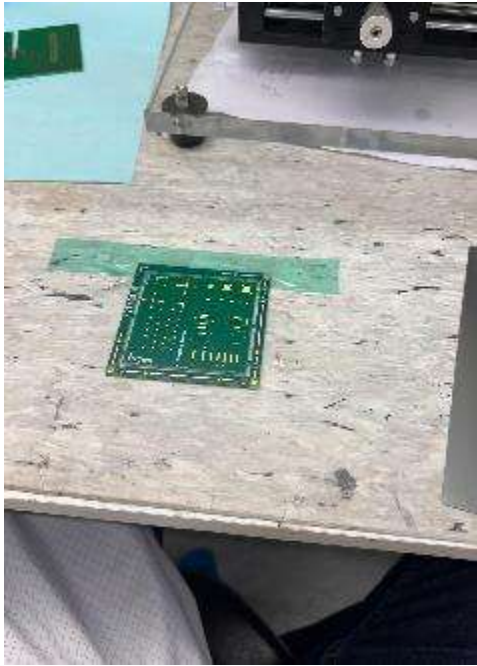

Print

Advantages	Disadvantages
Very Simple (no equipment)	Medium accuracy
Fast	Only Printing on Small areas
portable	No volume control
Compatible with Eurocircuits stencils and PCBs	Medium reproducibility
	Max. resolution tested 0.4x0.4mm ²

Die-bonder camera

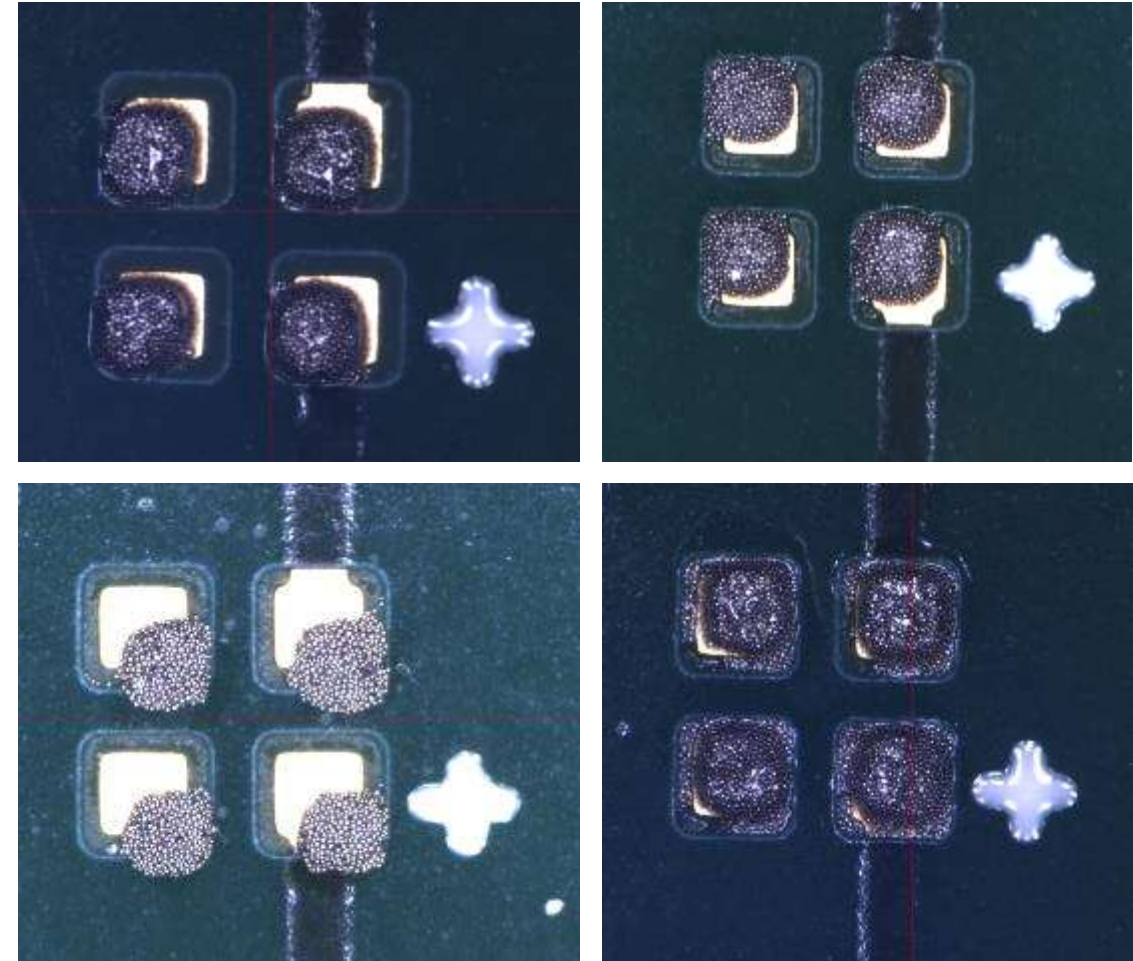


Solder paste

Thermally Stable Solder Paste No-Clean Sn42/Bi57.6/Ag0.4 T4

Specifications

Alloy:	Sn42/Bi57.6/Ag0.4
Mesh Size:	T4
Micron (µm) Range:	20-38
Flux Type:	Synthetic No-Clean
Flux Classification:	ROL0
Metal Load:	87% Metal by Weight
Melting Point:	138°C (281°F)

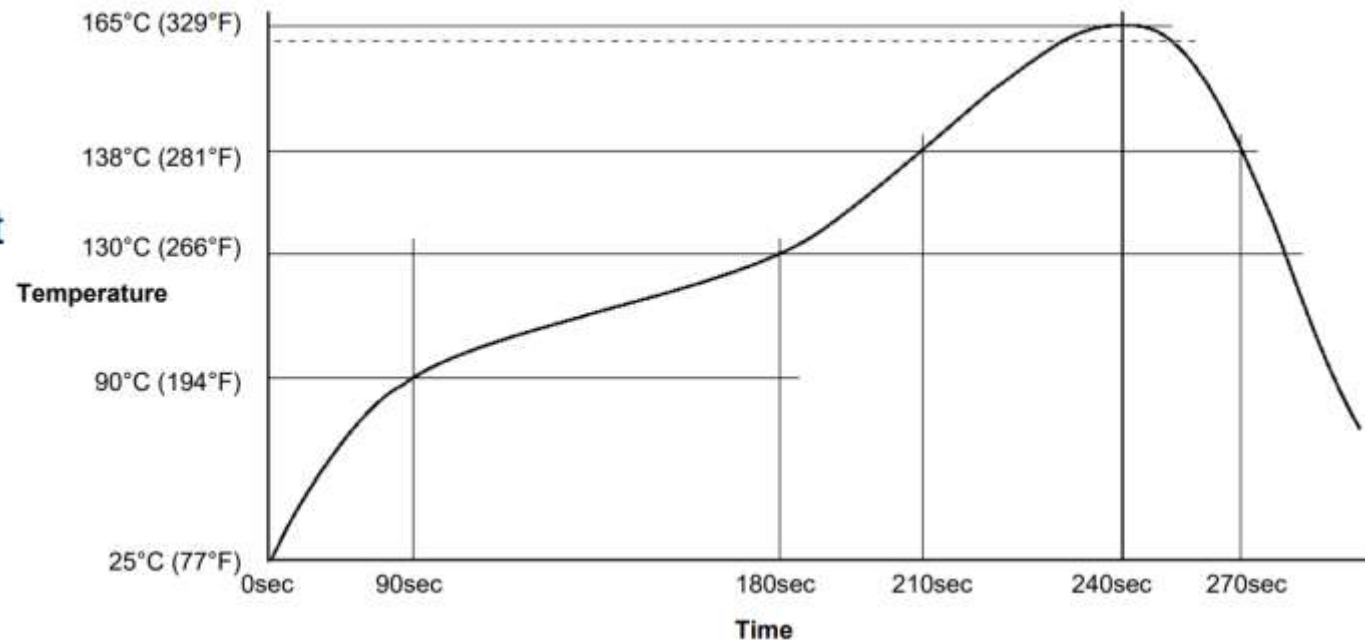

Tack Value

33g

Viscosity – Malcom @ 10 RPM/25°C Print: 140-195, Dispense: 115-160
(x10³mPa/s)