


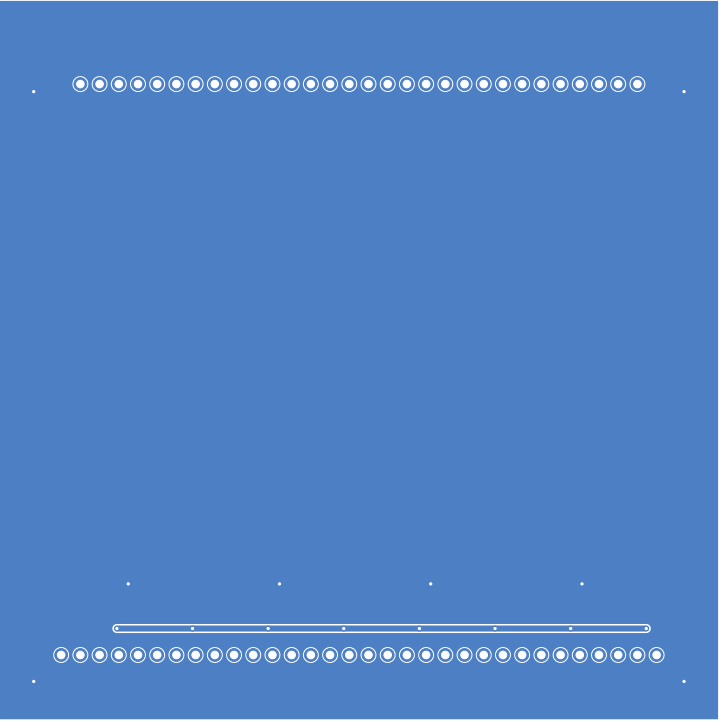

FABRICATION

2-layer FR-4 1.6 mm 1 oz Cu

Finish: ENIG (Ni 4 um / Au 0.075 um)

Mask: matte green / silk: white

Min clearance 0.15 mm / min trace 0.20 mm

Min via / drill 0.45 / 0.20 mm

ASSEMBLY

Paste: TS391LT Sn42 Bi57.6 Ag0.4

Stencil: 100 um SS (eC-stencil-mate)

Bonder: Tresky T-3000-PRO

Reflow: hot-plate, peak 165 C

Metrology: Keyence VK-X250 + X-ray + shear

DESIGNER

Daniel Tyukov – student no. 5714699

ET4277 + ET4391 – TU Delft MSc EE

based on Abdelwahab et al. ECTC 2025

TIER-2 SOUTH PINOUT

1-4 D1 5-8 D2 9-12 D3 13-16 D4
17-20 D5 21-24 D6 25-28 D7 29-32 D8

each group: A, KG, KB, KR (A = LED_VCC)
NORTH row: user-jumperable

NORTH row: user-jumperable

.....

.....