


A

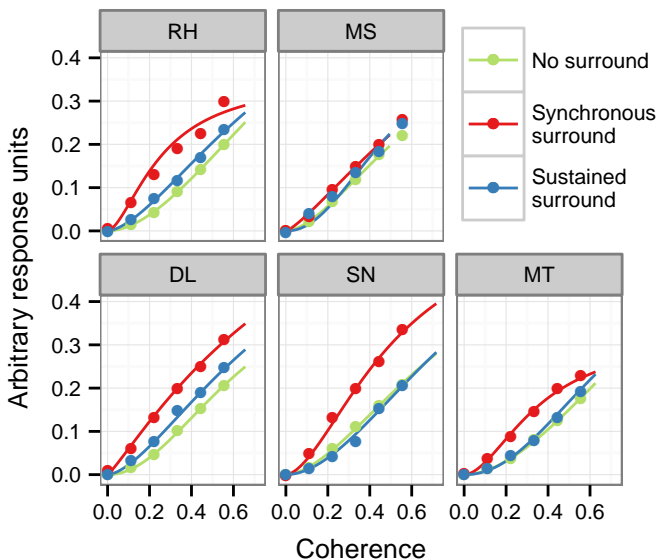

B

observer	condition	n	σ
DL	No surround	3.8	0.15
DL	Sustained surround	2.1	0.14
DL	Synchronous surround	0.8	0.10
SN	No surround	3.5	0.28
SN	Sustained surround	3.5	0.29
SN	Synchronous surround	1.6	0.23
MT	No surround	3.9	0.08
MT	Sustained surround	3.4	0.08
MT	Synchronous surround	1.1	0.03
RH	No surround	3.9	0.08
RH	Sustained surround	2.5	0.07
RH	Synchronous surround	1.2	0.02
MS	No surround	3.1	0.04
MS	Sustained surround	1.7	0.00
MS	Synchronous surround	1.9	0.01