




Standard: Aluminiumsvrid-  
er, innvendig vrknapp og  
utvendig blindskilt.

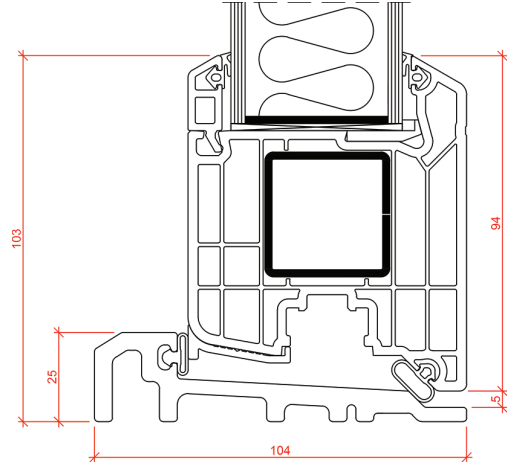

Standard: Leveres med 25 mm HC-terskel i glassfiber,  
kan også leveres med 65 mm terskel.

## H-facades PVC Classic 90 door

A further development of our very popular classic door, which has been produced and supplied for over 30 years. The door opens outwards and is supplied as a balcony door, secondary entrance door and internal door.

### Profile

Made of extruded, impact-resistant and climate-resistant PVC profiles with very good insulating properties, which provides good u-value. The U-value for the door is determined, among other things, by the insulating ability of the glass. Enova recommends windows with 3-layer energy-saving glass. Frame depth 90 mm.

- + Developed for the harsh Nordic climate
- + Great, classic design
- + Good U-value
- + Maintenance-friendly
- + Long service life
- + Recyclable

### Reinforcement

Hot-dip galvanized steel reinforcements.  
The reinforcements are installed into profiles for extra strength and stability.

### Hinges/Locks/Threshold

The balcony door has a Fix 3-point espagnolette and door brake for stepless "closing" in various ventilation positions. Standard threshold 25 mm [HC] in fiberglass, it can also be supplied with a 65 mm PVC threshold. Spilka hinges in aluminum 6063 with stainless pin A4. Supplied with external blind plate and internal thumb turn as standard.

The inner door does not have an espagnolette (espags), but an ordinary lock box that closes at one point [Assa 3107]. Supplied with internal thumb turn and external blind plate as standard. Other options are available upon request.

### Mullion/Full glass/Filling panel

It is possible to choose between different glass and filling panel combinations, from glass throughout the door to a filling panel in combination with glass, or a door without glass. The filling panels are made of insulated PVC elements. Standard thickness is 48mm. The minimum height for horizontal mullion is 300 mm.

### Decorative bars (sprossers)

Our windows can be supplied with decorative bars that can be glued on both sides of the glass, Georgians bars, removable Vindex bars or a combination.

### Dimensions

The doors are delivered in all sizes within the sizes shown in the table below:

	Min	Max
<b>Single door</b>		
Width	688	1088
Height	1788	2188
<b>Double door</b>		
Width	1088	1888
Height	1930	2188

NB! Max vekt er 80 kg. pr dørbblad.

### Grooves

The products can be delivered with 10x10mm grooves from inside of the frame [utføringsnot]

### Color

Standard white [RAL 9016]. A selection of other colors is available on request. See our websites for more information and available colors:

<https://www.hfasader.no/byggevarer/fargevalg/fargevalg-pvc/>

### Maintenance

The PVC profiles do not require maintenance, just cleaning with ordinary soapy water. Fittings require ordinary cleaning and