



H-FASADER PVC TREND 85 - LIFT & SLIDE DOOR

- enjoy the view and maximum daylight.

Elegant and solid Lift Sliding door that is easy to open and close, with good sealing and thermal properties. Raised sliding doors save space, create a fluid transition between outside and inside, and let in the important daylight.

- + Easy to operate
- + Good U-value
- + Narrow profiles that provide better light entry
- + Can be supplied with solid colored profiles
- + Maintenance-friendly
- + Long service life
- + Recyclable - profiles consisting of 36% is recycled PVC

Low door threshold with a height of 48mm + 5 mm sliding rail. Threshold can be installed lower during construction.



Profile:

The Trend profiles are made of extruded, through-dyed, impact-resistant and climate-resistant PVC profiles with very good insulating properties, which give a good U-value. Steel reinforcements are added to the profiles for extra strength and stability. Frame depth 197 mm.


Hardware

HAUTAU ATRIUM HS

Handle

Standard with external handle, internal handle in aluminum without locking cylinder. Can also be supplied with other solutions.

Terskel: Fiberglass threshold, 48 mm.

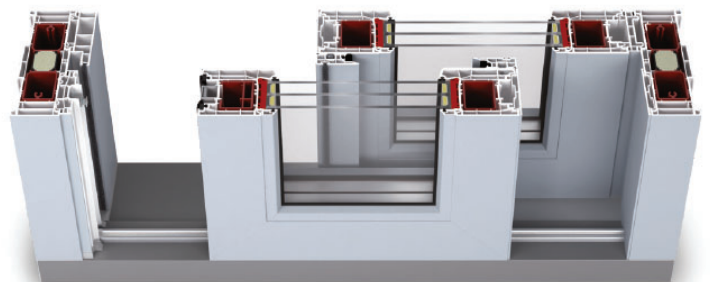

Dimensions

The doors are produced to order and according to your measurements and wishes.

The lift-and-slide door is supplied in the following sizes:

Min height: 1988 mm / Max height: 2588 mm

Min width: 1988 mm / Max width: 3988 mm

Certain other sizes/solutions can be delivered on request. Please contact us.

Color

Standard white [RAL 9016]. A selection of other colors is available on request.

See our websites for more information and available colours:

<https://www.hfasader.no/byggevarer/fargevalg/fargevalg-pvc/>

Can be supplied with solid-colored profiles.

Glass

Supplied with 3-layer glass. Safety glass on both sides is standard. We can supply various types of functional glasses. Functional glasses are supplied such as sun dampening, self-cleaning, anti-fog, noise-absorbing glass. Choose the right glass based on your needs and get the desired effect.

Internal groove

Supplied as standard without groove. It can be delivered at an additional cost with click-on profile for 10x10mm internal groove (utføringsnot)



Tests

Driving rain density according to EN 12208: 9A

U-value: Good U-values. Determined, among other things, by the glass insulating ability and will depend on size.

Maintenance

The PVC profiles do not require maintenance, just cleaning with normal water soapy water. The locking system and fittings require ordinary cleaning and lubrication.

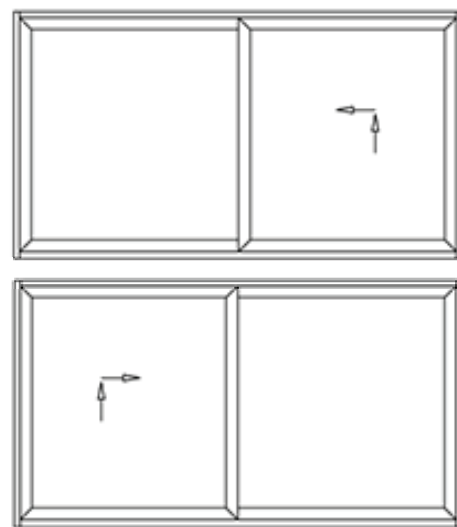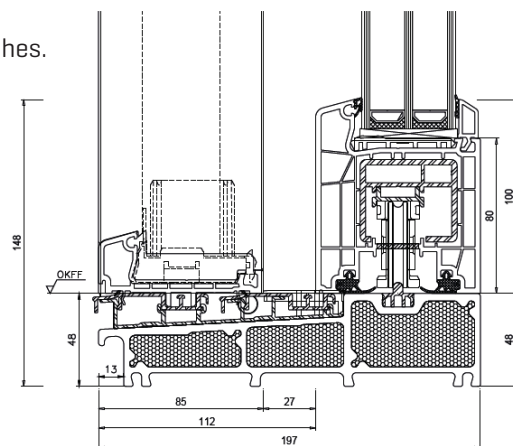

Innvendig skyvbart felt.

