



DCO


Digitally-Controlled Oscillator


Daniel Winz

19. März 2013

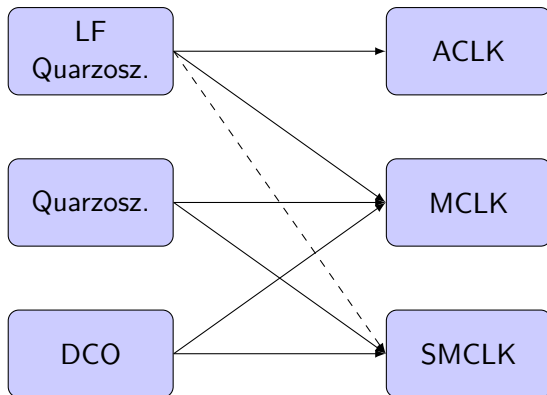


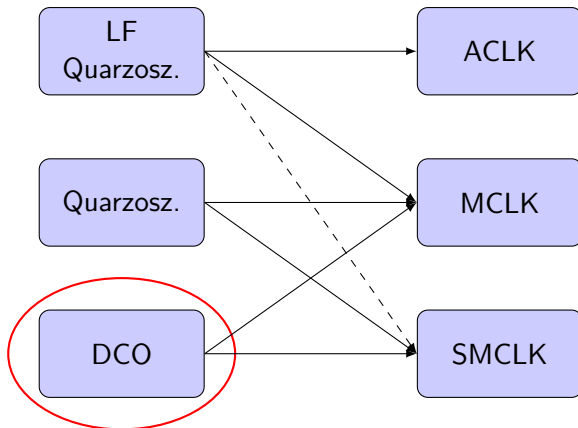










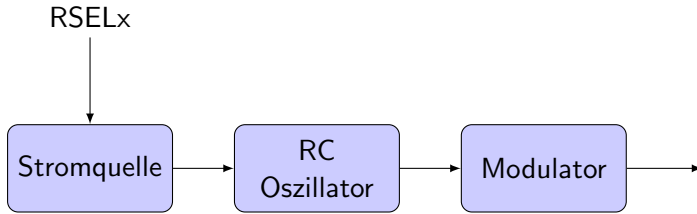


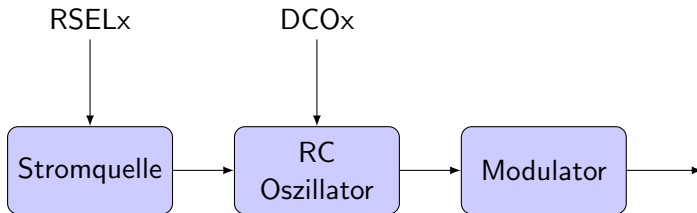


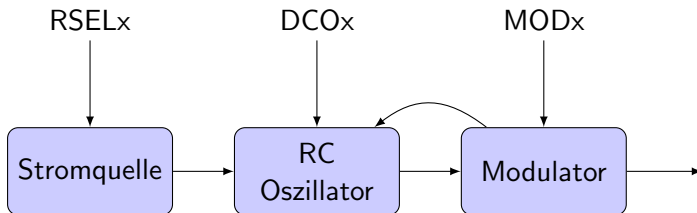

MOD = 0



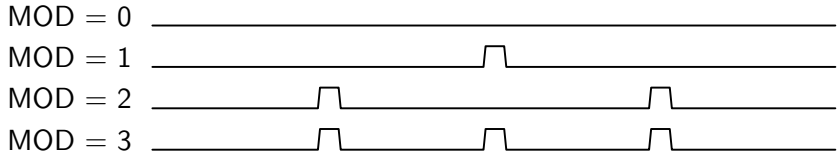

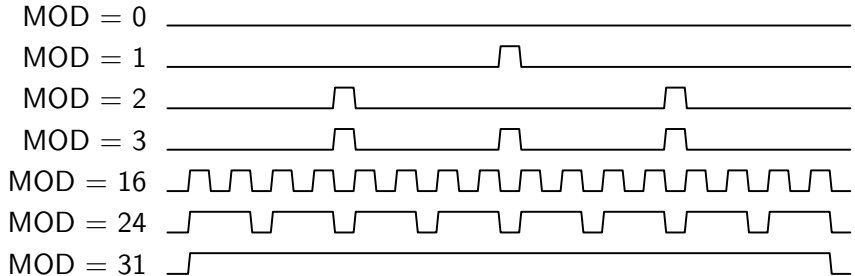

MSP430G2x53
MSP430G2x13

www.ti.com

SLAS735H – APRIL 2011 – REVISED FEBRUARY 2013

DCO Frequency

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V _{CC}	MIN	TYP	MAX	UNIT
V _{CC} Supply voltage	RSELx < 14		1.8		3.6	V
	RSELx = 14		2.2		3.6	
	RSELx = 15		3		3.6	
f _{DCO(0,0)} DCO frequency (0, 0)	RSELx = 0, DCOx = 0, MODx = 0	3 V	0.06		0.14	MHz
f _{DCO(0,3)} DCO frequency (0, 3)	RSELx = 0, DCOx = 3, MODx = 0	3 V	0.07		0.17	MHz
f _{DCO(1,3)} DCO frequency (1, 3)	RSELx = 1, DCOx = 3, MODx = 0	3 V		0.15		MHz
f _{DCO(2,3)} DCO frequency (2, 3)	RSELx = 2, DCOx = 3, MODx = 0	3 V		0.21		MHz

Abbildung: Auszug aus dem Datenblatt des MSP430G2553

- Texas Instruments

- Texas Instruments
MSP430F2x $\rightarrow \pm 1\%$

- Texas Instruments
MSP430F2x $\rightarrow \pm 1\%$
- Inbetriebnahme

- Texas Instruments
MSP430F2x $\rightarrow \pm 1\%$
- Inbetriebnahme
- FLL