LOWER COLUMBIA RIVER GRP OCTOBER 2015

Red Slough- E side of Tenasillahe Island (OR)

LCR-35.0M

Position - Location: 46° 14	4.573', -123° 27.098'	46° 14' 34.4"	, -123° 27' 5.9"	46.24289,	-123.45164	Skamokawa
------------------------------------	-----------------------	---------------	------------------	-----------	------------	-----------

Strategy Objective: Exclusion: Prevent oil from entering Red Slough.

Implementation: Launch workboat from BL-LCR-33.5R with 800ft. boom. Deploy boom across the E entrance to Red Slough and anchor at AP-1 and AP-2

using shoreside anchor posts. Anchor along boom length as necessary for conditions. Close tide gates by contacting USFWS through

Wahkiakum County Sheriff (360) 795-3911.


Staging Area: Remote: Stage at SA-LCR-33.5R, Skamokawa Vista Park

Site Safety: Slips, trips, and falls. Water hazards.

Field Notes: Boat access only, between Welch and Tenasillahe Islands.

Watercourse: Slough - Columbia River

Resources at Risk: Emergent Wetlands

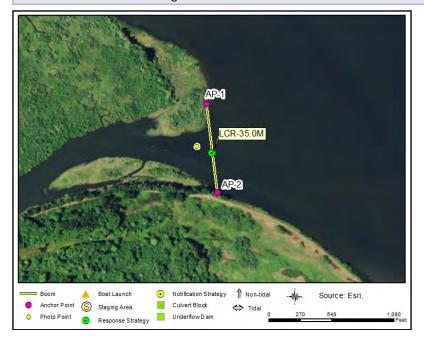

Recommended Equipment

7	Each	Anchor - Danforth (or other appropriate type)		
2	Each	Anchoring System(s)- Shoreside		
800	Feet	Boom - B3 (River Boom) or equivalent		
1	Each	Workboat(s) - of adequate size for type and amount of boom		

Recommended Personnel

1	Boat Operator
3	Laborer
1	Supervisor

APPENDIX 4A 245