

Upstream Wallace Island (OR)

LCR-50.5L

Position - Location: 46° 8.812', -123° 13.715' 46° 8' 48.7", -123° 13' 42.9" 46.14687, -123.22859 Clatskanie

Strategy Objective: Exclusion : Prevent oil from entering side channel of Columbia towards Clatskanie River and Beaver Slough.

Implementation: Launch from Port Westward, BL-LCR-53.8L, with 1800 ft of boom. Anchor 800 ft section of boom at A1, upstream of Poysky Slough. Extend SW to tip of small island and anchor at A2 using tree or posts. Anchor second 1000 ft section of boom to tree or post at N tip of small island at A3 and extend W to upstream tip of Wallace Island. Use shoreside posts or trees to secure to shore. Anchor every 100-150 ft along boom or as needed for conditions.


Staging Area: Remote: Stage at Port Westward, SA-LCR-53.8L. Launch from same BL-LCR-53.8L.

Site Safety: Slips, trips, falls. Water hazard.

Field Notes: Side channel of Columbia River with forested islands

Watercourse: River - Side Channel - Tidal influence in area.

Resources at Risk: Osprey Nest(s), Salmon Concentrations and Habitat, Wetlands

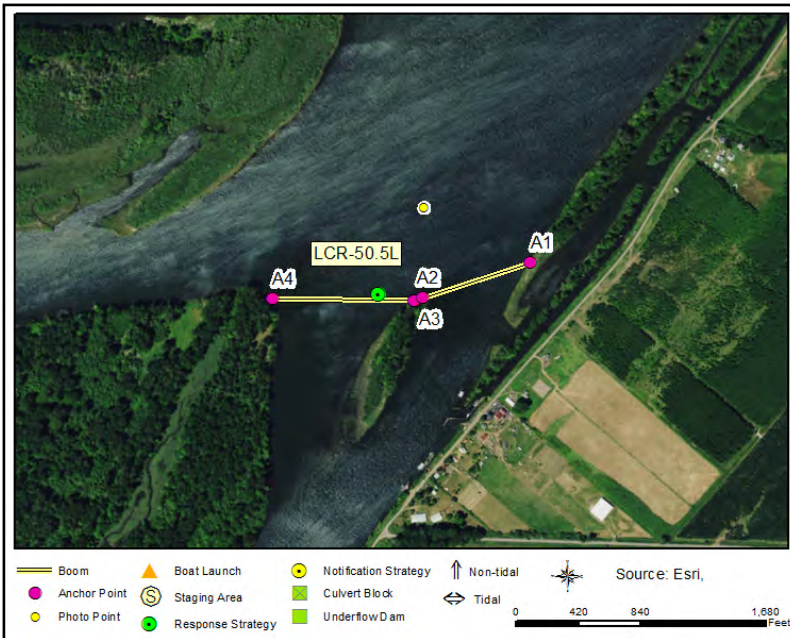

Recommended Equipment

4 Kit	Anchoring Post(s) - (shoreside)
16 Kit	Anchoring System(s) - (anchor, lines, floats)
1800 Feet	Boom - B3 (River Boom) or equivalent
1 Each	Workboat(s) - of adequate size for type and amount of boom

Recommended Personnel

1	Boat Operator
3	Laborer
1	Supervisor