

Mouth of Washougal River (WA)**LCR-120.6R**

Position - Location: 45° 34.581', -122° 24.157' 45° 34' 34.8", -122° 24' 9.4" 45.57635, -122.40261 Washougal

Strategy Objective: Collection, Exclusion : Collect and recover oil on banks of bridge at Lady Island.

Implementation: Launch workboat from BL-LCR-121.6R with 1200ft. of boom. Deploy in a chevron formation with 700ft. boom on west side of bridge and 500ft. boom on east side of bridge. Anchor at the small island, AP-1, using natural anchors or shoreside anchor posts. Anchor BM-1 to AP-2 and BM-2 to AP-3 using shoreside anchor posts. Recover oil on either side of the bridge on water using portable skimmer and storage.

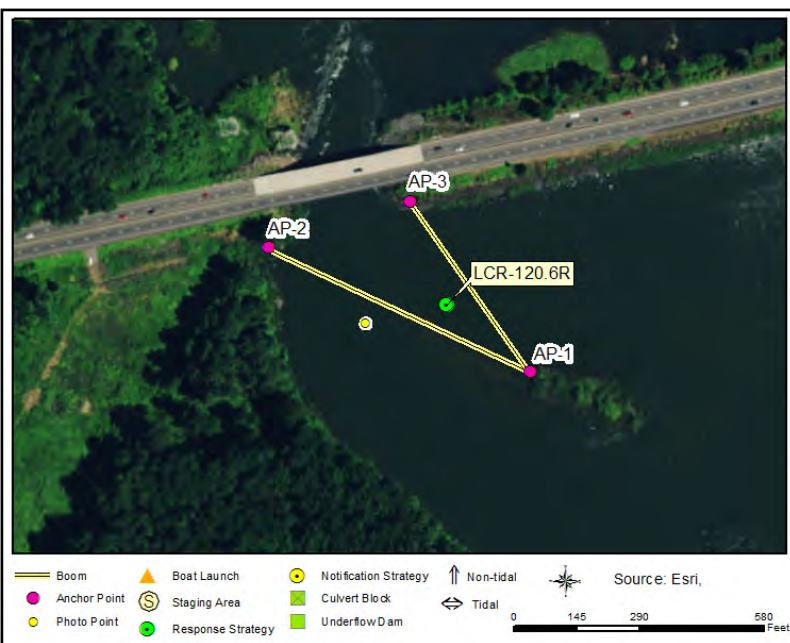
Staging Area: Remote: Stage at Port of Camas, SA-LCR-121.6R

Site Safety: Slips, trips, and falls. Vehicle traffic and potential for shallow water hazards.

Field Notes: Main current and channel run along the Lady Island shoreline. Water to the NE of the small island is very shallow.

Watercourse: Slough - Lower Columbia River - Camas Slough

Resources at Risk: Downstream Resources, Salmonid Concentrations and Habitat, Walleye Spawning Area

**Recommended Equipment**

10	Each	Anchor - Danforth (or other appropriate type)
3	Each	Anchoring System(s)- Shoreside
1200	Feet	Boom - B3 (River Boom) or equivalent
1	Each	Skimmer (appropriately sized) with Portable Storage
1	Each	Workboat(s) - of adequate size for type and amount of boom

Recommended Personnel

1	Boat Operator
2	Laborer
1	Supervisor