LOWER COLUMBIA RIVER GRP OCTOBER 2015

Gull Island- North Side (OR)

LCR-55.3M

Position - Location:	46° 10.985', -123° 8.787'	46° 10' 59.1", -123° 8' 47.2"	46.18309, -123.14644	Cathlamet
----------------------	---------------------------	-------------------------------	----------------------	-----------

Strategy Objective: Exclusion: Prevent oil from entering back waters behind Gull Island

Implementation:

Launch workboat with 800ft. boom and shallow-water skiff from Willow Grove boat launch, BL-LCR-57.8R. Use shallow-water skiff to deploy boom across the north opening to the sloughs on Gull Island. Anchor to AP-1 and AP-2 using shoreside anchor posts. Anchor

along boom length as necessary for conditions.


Remote: Stage from Willow Grove County Park, SA-LCR-57.8R Staging Area:

Site Safety: Shallow water hazard, slips, trips, falls.

Field Notes: Boat access only. This strategy is only needed during high flow conditions.

Watercourse: River - With Tidal Influence - Columbia River

Resources at Risk: Mudflat Habitat, Wetland Habitat

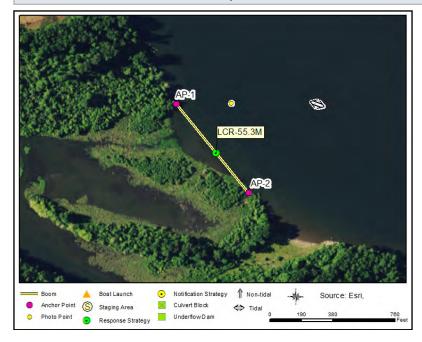

Recommended Equipment

7	Each Anchor - Danforth (or other appropriate type)		
2	Each	Anchoring System(s)- Shoreside	
800	Feet	Boom - B3 (River Boom) or equivalent	
1	Each	Workboat(s) - of adequate size for type and amount of boom	
1	Each	Workboat(s) - (jon boat)	

Recommended Personnel

2 Boat Operator 2 Laborer 1 Supervisor

APPENDIX 4A 309