LOWER COLUMBIA RIVER GRP OCTOBER 2015

Meldrum Slough (OR)

WR-23.9R

Position - Location: 45° 22.734', -122° 37.040' 45° 22' 44.1", -122° 37' 2.4" 45.37891, -122.61734 Gladstone

Strategy Objective: Exclusion: Prevent oil from entering the Meldrum Slough and wetlands.

Implementation: Launch workboat from Meldrum Bar Park, BL-WR-24.2R, with 100ft. boom. Dep

Launch workboat from Meldrum Bar Park, BL-WR-24.2R, with 100ft. boom. Deploy boom across southern entrance to slough. Anchor boom at AP-1 and AP-2 using natural anchor points on each side of Meldrum Bar. Use a danforth type anchor along boom line if needed

based on conditions of the day.


Staging Area: Remote: Stage at SA-WR-24.2R Meldrum Bar Park, launch from same BL-WR-24.2R.

Site Safety: Slips, trips, and falls. Water hazards.

Field Notes: Boat access only. Strategy is at the southern opening to Meldrum Slough.

Watercourse: River - Below a Dam - Willamette River

Resources at Risk: Waterfowl, Wetland Habitat

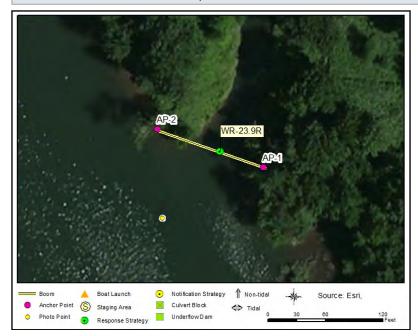

Recommended Equipment

1	Each	Anchor - Danforth (or other appropriate type)
2	Each	Anchoring System(s)- Shoreside
100	Feet	Boom - B3 (River Boom) or equivalent
1	Each	Workboat(s) - of adequate size for type and amount of boom

Recommended Personnel

1	Boat Operator
2	Laborer
1	Supervisor

APPENDIX 4A 537