LOWER COLUMBIA RIVER GRP OCTOBER 2015

Crims Island- South Side (OR)

LCR-55.1M

Position - Location: 46° 1	10.367', -123° 9.063'	46° 10' 22.0", -123° 9' 3.8"	46.17278, -123.15106	Clatskanie
-----------------------------------	-----------------------	------------------------------	----------------------	------------

Strategy Objective: Exclusion: Exclusion to prevent oil from entering Crims Island wetland area

Implementation:

Launch workboat with 700ft. boom and shallow-water skiff from Port Westward boat launch, BL-LCR-53.8L. Use shallow-water skiff to deploy boom in a chevron across the south end slough on Crims Island. Anchor to AP-1 and AP-2 using shoreside anchor posts. Anchor to AP-3 using Danforth or other anchor and along boom length as necessary for conditions.


Staging Area: Remote: Stage at Port Westward boat launch, SA-LCR-53.8L. Launch from same BL-LCR-53.8L.

Site Safety: Slips, trips, and falls. Shallow water hazards.

Field Notes: Water is very shallow in this area. During low water, strategy may not be feasible or necessary.

Watercourse: Slough - Bradbury Slough

Resources at Risk: Mudflat Habitat, Wetlands Restoration Site

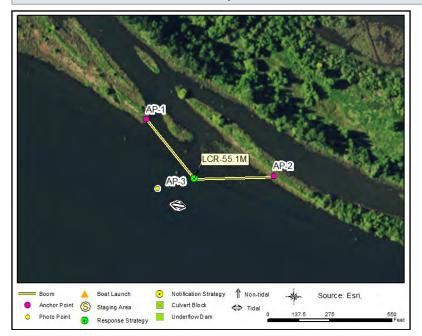

Recommended Equipment

6	Each	Anchor - Danforth (or other appropriate type)	
2	Each	Anchoring System(s)- Shoreside	
700	Feet	Boom - B2 (Contractor Boom) or equivalent	
1	Each	Workboat(s) - of adequate size for type and amount of boom	
1	Each	Workboat(s) - (jon boat)	

Recommended Personnel

2	Boat Operator
2	Laborer
1	Supervisor

APPENDIX 4A 307