LOWER COLUMBIA RIVER GRP OCTOBER 2015

Welch Island sloughs (OR) - east side of island

LCR-34.6M

Strategy Objective: Exclusion: Prevent oil from entering sloughs on Welch Island

Implementation: Launch workboat from Skamokawa Vista Park, BL-LCR-33.5R with 500ft. boom. Deploy boom across the east entrance of the slough that

runs through the middle of Welch Island. Anchor at AP-1 and AP-2 using shoreside anchor posts and anchor along boom length as

necessary for conditions.


Staging Area: Remote: Stage at Skamokawa Vista Park, SA-LCR-33.5R

Site Safety: Slips, trips, and falls. Water hazards.

Field Notes: Boat access only to sloughs on east side of Welch Island.

Watercourse: Slough - Columbia River

Resources at Risk: National Wildlife Refuge, Sensitive Wetland Habitat

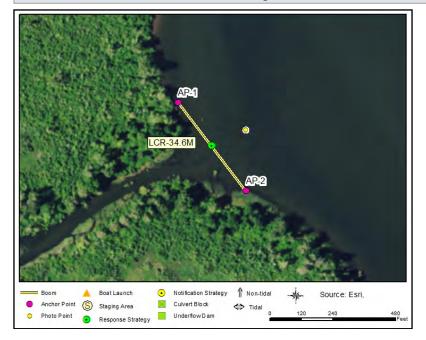

Recommended Equipment

4	Each	Anchor - Danforth (or other appropriate type)
1	Each	Anchoring System(s)- Shoreside
500	Feet	Boom - B3 (River Boom) or equivalent
1	Each	Workboat(s) - of adequate size for type and amount of boom

Recommended Personnel

1 B	Boat Operator
2 L	Laborer
1 S	Supervisor

APPENDIX 4A 241