OCTOBER 2015 LOWER COLUMBIA RIVER GRP

## **Carrolls Channel - S end (WA)**

## LCR-71.4R

<b>Position - Location:</b> 46° 3.490	D', -122° 52.098' 40	6° 3' 29.4", -122° 52' 5.9"	46.05817, -122.86829	Kalama
---------------------------------------	----------------------	-----------------------------	----------------------	--------

Exclusion: Prevent oil from entering inlet at the south end of the channel (east side). Strategy Objective:

Implementation: Launch workboat with 1,000ft. boom from Sportsmen's Club boat launch, BL-LCR-72.7R. Deploy boom across mouth of inlet at SE end of

Carrolls Channel and anchor at AP-1 and AP-2 using shoreside anchor posts. Anchor every 100-150ft, along boom length or as necessary

for conditions.


Remote: Stage at Sportsmen's Club, SA-LCR-72.7R Staging Area:

Site Safety: Slips, trips, and falls. Water hazards. Water is shallow with lots of broken pilings.

Field Notes: Boat access only. Water is shallow with little current.

Watercourse: River - Side Channel - Carrolls Channel

Resources at Risk: Wetland Habitat

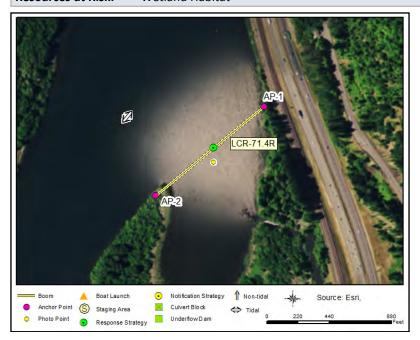

## **Recommended Equipment**

9	Each	Anchor - Danforth (or other appropriate type)	
2	Each	Anchoring System(s)- Shoreside	
1000	Feet	Boom - B2 (Contractor Boom) or equivalent	
1	Each	Workboat(s) - of adequate size for type and amount of boom	

## **Recommended Personnel**

1 Boat Operator	
2 Laborer	
1 Supervisor	

**APPENDIX 4A** 343