

Wallace Island Slough - North center (OR)

LCR-49.1M

Position - Location: 46° 8.553', -123° 15.010' 46° 8' 33.2", -123° 15' .6" 46.14255, -123.25016 Clatskanie

Strategy Objective: Exclusion : Prevent oil from entering sloughs on north side of Wallace Island

Implementation: Launch workboat with 400ft. boom and shallow-water skiff from Port Westward boat launch, BL-LCR-53.8L. Using shallow-water skiff, deploy boom across the entrance to the channel on the north side of Wallace Island. Anchor to AP-1 and AP-2 using shoreside anchor posts or natural anchors. Anchor along boom length as necessary for conditions.


Staging Area: Remote: Stage at Port Westward boat launch, SA-LCR-53.8L. Launch from same BL-LCR-53.8L.

Site Safety: Very shallow and muddy, water hazard, slips, trips, falls.

Field Notes: Boat access only. Water is very shallow. At low water, access to strategy may not be possible.

Watercourse: Slough - Wallace Island Slough

Resources at Risk: Marsh Habitat, National Wildlife Refuge, Waterfowl, Whitetail Deer Habitat

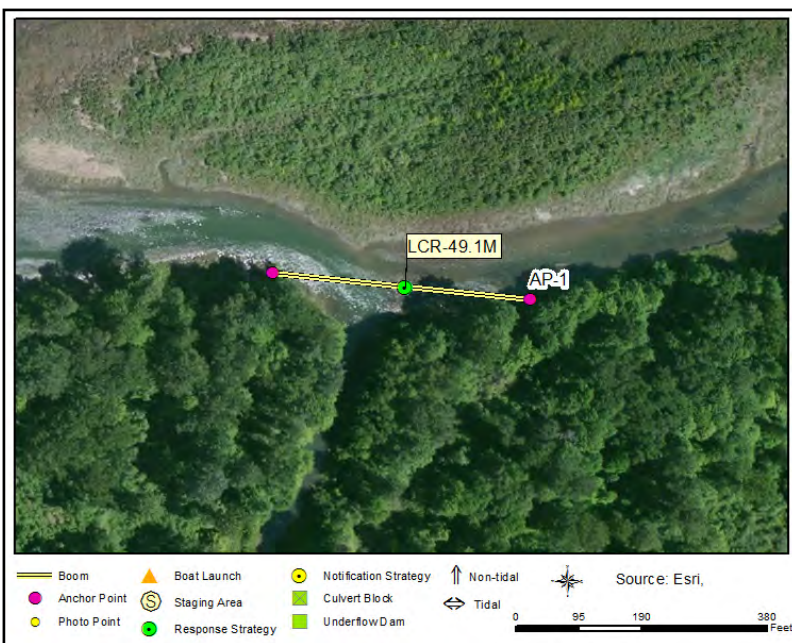

Recommended Equipment

3	Each	Anchor - Danforth (or other appropriate type)
2	Each	Anchoring System(s)- Shoreside
400	Feet	Boom - B3 (River Boom) or equivalent
1	Each	Workboat(s) - of adequate size for type and amount of boom
1	Each	Workboat(s) - (jon boat)

Recommended Personnel

2	Boat Operator
1	Laborer
1	Supervisor