LOWER COLUMBIA RIVER GRP OCTOBER 2015

Cedar Island (OR) WR-23.6L

Position - Location: 45° 23.093', -122° 37.482' 45° 23' 5.6", -122° 37' 28.9" 45.38488, -122.62470 West Linn

Strategy Objective: Exclusion: Prevent oil from entering west channel behind Cedar island.

Implementation: Launch workboat from Cedaroak Boat Ramp, BL-WR-23.1L, with 500ft. boom. Deploy boom in chevron configuration across the

southern entrance of the channel to the west of Cedar Island. Anchor at AP-1 and AP-2 using natural anchors or shoreside anchor posts

and anchor at AP-3 using Danforth or other anchor. Anchor along boom length as necessary for conditions.


Staging Area: Remote: Stage at SA-WR-23.1L, Cedaroak Boat Ramp, launch at same BL-WR-23.1L.

Site Safety: Slips, trips, and falls. Water hazards.

Field Notes:

Watercourse: River - Below a Dam - Willamette River

Resources at Risk: Osprey, Shallow Water Habitat, Turtles

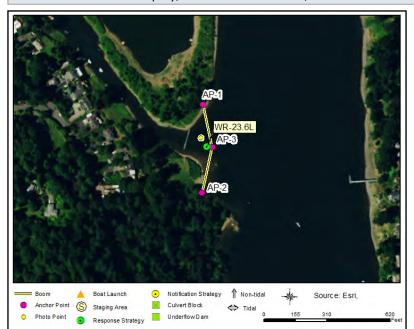

Recommended Equipment

5	Each	Anchor - Danforth (or other appropriate type)
2	Each	Anchoring System(s)- Shoreside
500	Feet	Boom - B3 (River Boom) or equivalent
1	Each	Workboat(s) - of adequate size for type and amount of boom

Recommended Personnel

1 Boat Operator	
2 Laborer	
1 Supervisor	

APPENDIX 4A 533