

Gull/ Crims Islands - W opening (OR)**LCR-54.4M**

Position - Location: 46° 11.051', -123° 9.570' 46° 11' 3.1", -123° 9' 34.2" 46.18419, -123.15950 Clatskanie

Strategy Objective: Exclusion : Exclusion to protect backwaters behind Gull Island.

Implementation: Launch workboat with 500ft. boom and shallow-water skiff from Port Westward boat launch, BL-LCR-53.8L. Use shallow-water skiff to deploy boom across the west opening between Gull Island and Crims Island. Anchor to AP-1 and AP-2 using natural anchor points. Anchor every 100-150ft. along boom length or as necessary for conditions.

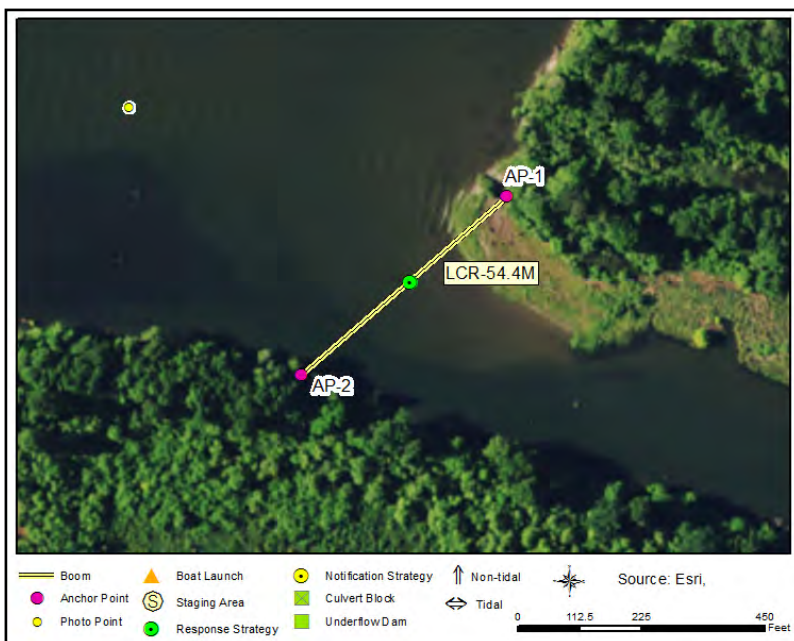
Staging Area: Remote: Stage at Port Westward boat launch, SA-LCR-53.8L. Launch from same BL-LCR-53.8L.

Site Safety: Shallow water, slips, trips, falls. Water hazards.

Field Notes: Water in this area is very shallow. At low water, strategy may not be feasible or necessary.

Watercourse: Slough - Water between islands is very shallow. Much of it may be dry during low water flow.

Resources at Risk: Wetland Habitat

**Recommended Equipment**

3	Each	Anchor - Danforth (or other appropriate type)
2	Each	Anchoring System(s)- Shoreside
500	Feet	Boom - B3 (Contractor Boom) or equivalent
1	Each	Workboat(s) - of adequate size for type and amount of boom
1	Each	Workboat(s) - (jon boat)

Recommended Personnel

2	Boat Operator
2	Laborer
1	Supervisor