


ITEM#472581 OPERATION INSTRUCTIONS

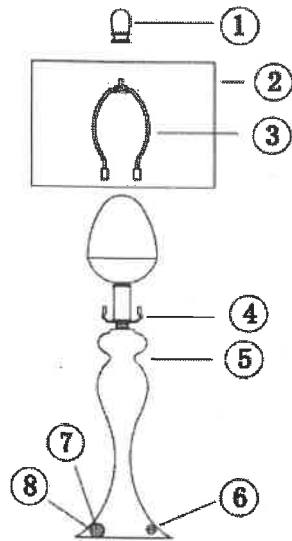

- ① FINIAL
- ② SHADE
- ③ HARP
- ④ SADDLE
- ⑤ LAMP BODY
- ⑥ USB CHARGING PORT
- ⑦ POWER BUTTON
- ⑧ CHARGING INDICATION LIGHT

* Install

1. Carefully remove all parts from box and remove all plastic covering from lamp parts.
2. Place the LAMP BODY ⑤ on a table.
3. Place the HARP ③ onto the SHADDLE ④.
4. Put the SHADE ② onto the HARP ③ and tighten it with the FINIAL ①.

* Light up

Touch the POWER BUTTON ⑦ to turn on the light in one second.

There are 3 levels dimming.

1. Lightly touch the SWITCH ⑦ with finger, the lamp is on and the light is the brightest.
2. Lightly touch the POWER BUTTON ⑦ with finger for the second time, the light is brighter.
3. Lightly touch the POWER BUTTON ⑦ with finger for the third time, the brightness is the lowest.
4. Lightly touch the POWER BUTTON ⑦ with finger for the fourth time, the lamp is off.

*Charging

1. After the lamp being out of electricity, insert the end of the cord into the USB CHARGING PORT ⑥ of the lamp, then insert the Adaptor (included) into a qualified socket, the CHARGING INDICATION LIGHT ⑧ around the switch will twinkle when charging.
2. After the lamp being fully charged, the CHARGING INDICATION LIGHT ⑧ will stop twinkling but still be on.
3. Pls pull out the adaptor from the socket after the lamp being fully charged to prolong the life of the Battery.
4. Charging time: 4-5 hours with 2A Adaptor.
5. Discharging Time: 4-35 hours (depending on its brightness).

*Product Description

Material: Metal and Fabric

Battery Specification: 3.6V, 5000mAh, 18Wh

Adaptor Input: 100-240V-50/60Hz 0.35A Max.

Light source: LED Panel Light with 50 PCS LED light beads

Light Power: 0.5W, 2W, 7W (depending on its brightness)

LED Life: 30000-50000 hours

Battery Life Cycles: 500 times

Adaptor Output: 5.0V-2A

Luminous Flux: 57.5LM-591 LM

Color Temperature: 2900K - 3100 K

Power Switch: Touch Button