



Digital Audio



Audio Formats

Raw, uncompressed audio:

- WAV

Lossless, compressed audio:

- FLAC (Free Lossless Audio Codec)
- ALAC (Apple Lossless Audio Codec)

Lossy, compressed audio:

- MP3
- OGG Vorbis
- AAC (Advanced Audio Coding)



Loudness - dB SPL (not digital)

The most common use of dB is decibel of sound pressure level (dB SPL)

Compared to a 60 dB sound: 70 dB sounds 2x as loud, 80 dB sounds 4x as loud, 90 dB sounds 8x as loud and so on...

Here are some common reference points in audio:

- Threshold of Hearing (Quietest Sound): 0 dB SPL
- Normal Speech Level: 60 dB SPL
- Average Music Listening Level: 80 dB SPL
- Threshold of Pain (Extremely Loud): 140 dB SPL



Loudness - dBFS

- Decibels relative to full scale
- Used in digital settings
- 0 dBFS is assigned to the maximum possible digital level
- All values quieter than that are negative values
- The number of possible values that can be represented is determined by the bit depth of the audio file




Bit Depth

- 16-bit: 65,536 values (CDs, compressed audio in Unity)
- 24-bit: 16,777,216 values (Blu-ray audio, uncompressed audio in Unity)
- 32-bit: 4,294,967,296 values

Sample Rate

- 16,000 Hz
- 22,500 Hz
- 44,100 Hz (CDs)
- 48,000 Hz
- 96,000 Hz
- 128,000 Hz

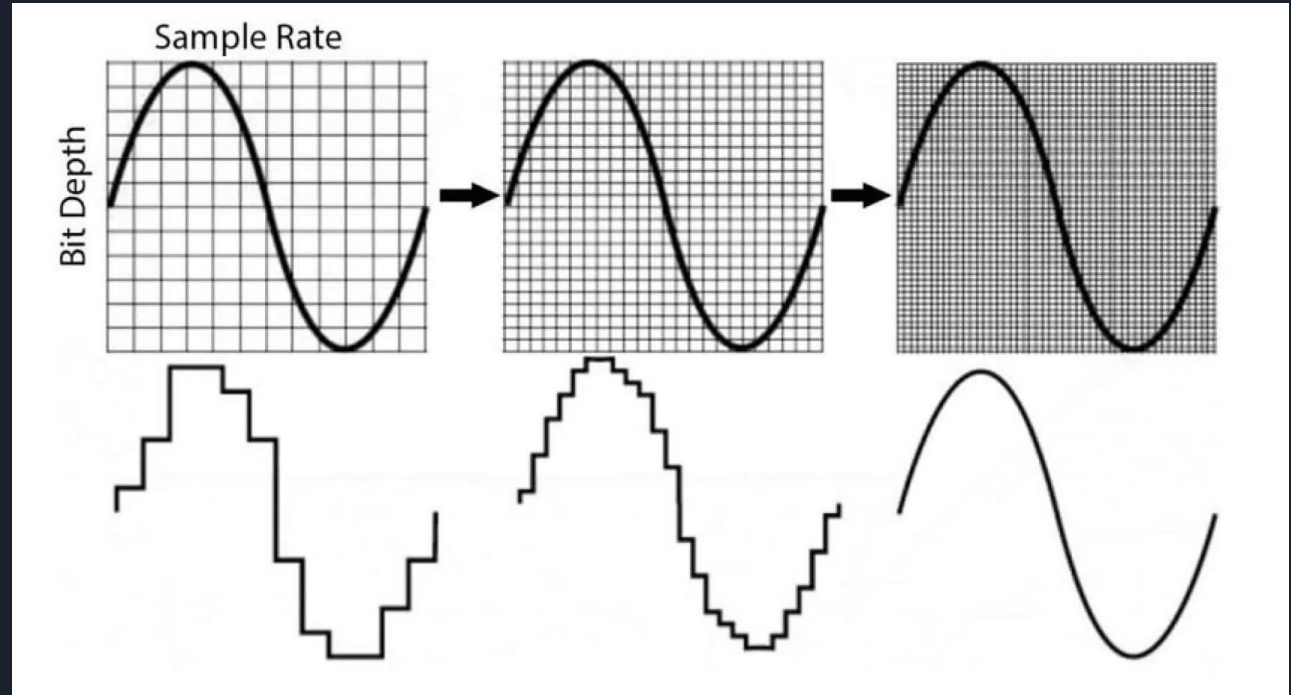

[source](#)




Nyquist-Shannon Sampling Theorem

“The sample rate must be at least twice the highest frequency of the signal to avoid aliasing”



Tuna	50 Hz-1.1 kHz
Chicken	125 Hz-2 kHz
Goldfish	20 Hz-3 kHz
Bullfrog	100 Hz-3 kHz
Catfish	50 Hz-4 kHz
Tree frog	50 Hz-4 kHz
Canary	250 Hz-8 kHz
Cockatiel	250 Hz-8 kHz
Parakeet	200 Hz-8.5 kHz
Elephant	17 Hz-10.5 kHz
Owl	200 Hz-12 kHz
Human	31 Hz-19 kHz
Chinchilla	52 Hz-33 kHz
Horse	55 Hz-33.5 kHz
Cow	23 Hz-35 kHz
Raccoon	100 Hz-40 kHz
Sheep	125 Hz-42.5 kHz
Dog	64 Hz-44 kHz
Ferret	16 Hz-44 kHz
Hedgehog	250 Hz-45 kHz
Guinea pig	47 Hz-49 kHz
Rabbit	96 Hz-49 kHz
Sea lion	200 Hz-50 kHz
Gerbil	56 Hz-60 kHz
Opossum	500 Hz-64 kHz
Albino rat	390 Hz-72 kHz
Hooded rat	530 Hz-75 kHz
Cat	55 Hz-77 kHz
Mouse	900 Hz-79 kHz
Little brown bat	10.3 kHz-115 kHz
Beluga whale	1 kHz-123 kHz
Bottlenose dolphin	150 Hz-150 kHz
Porpoise	75 Hz-150 kHz

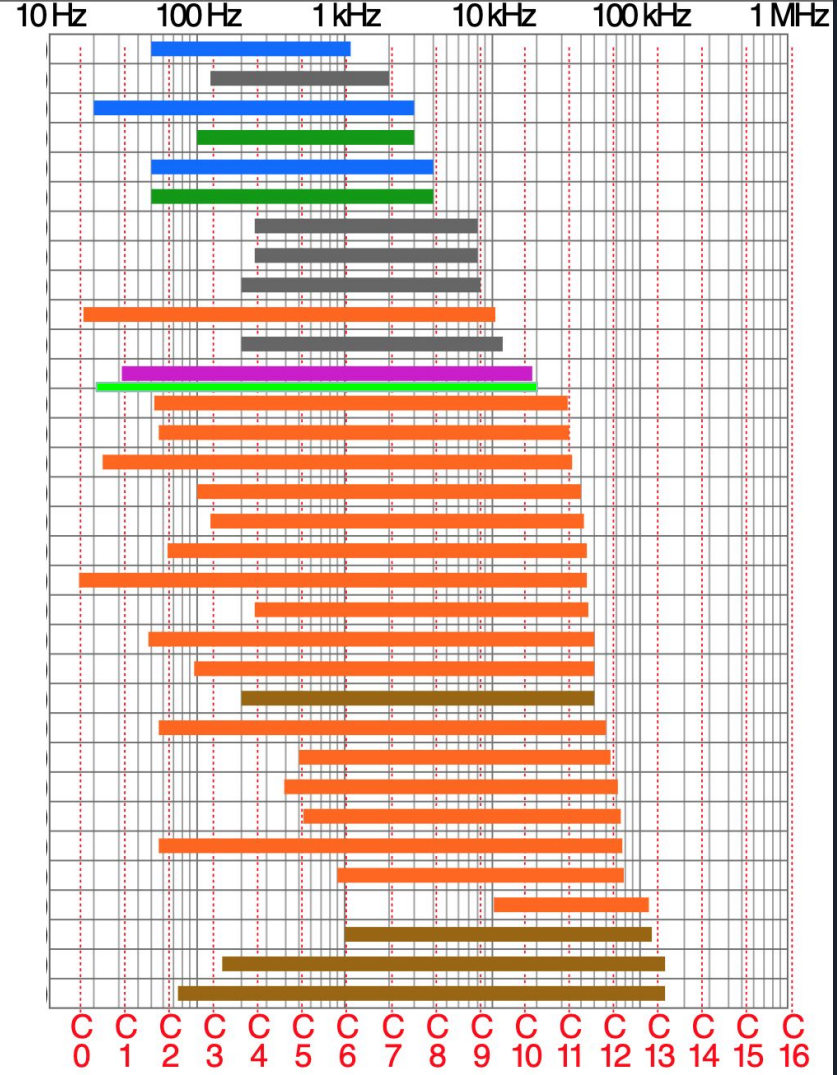


Mono, Stereo, 5.1, 7.1

Mono - a single audio track

Stereo - two audio tracks (one for each ear)

5.1

The more channels, the more MB!

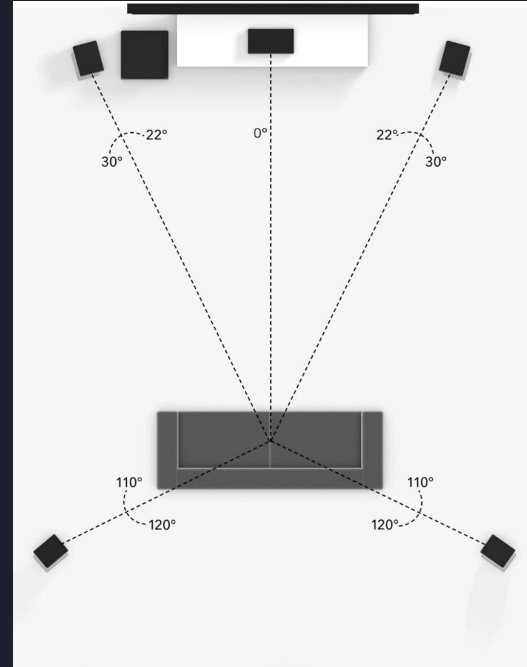

[Source](#)



Calculating Filesize

Filesize = sample rate \times bit depth \times length (seconds) \times number of channels

Filesize = $48,000 \times 16 \times 30 \times 2$ (stereo)

Filesize = 46,080,000 bits

Filesize = 5,760,000 bytes

Filesize = 5.76 MB (megabytes)

The Nintendo DS had a total RAM of 4 MB...



Audio in Video Games - RAM

Audio files are compressed and loaded into the RAM for fast access

An audio file can then be decompressed when a sound needs to be played.
This costs the CPU a little bit of usage

The audio can be stored in RAM uncompressed and then instantly played as decompression is not needed. This costs the CPU nearly zero usage, but comes at the cost of using RAM

Studios will typically allocate a tiny amount of RAM to the sound developers



Audio in Video Games - Streaming

Audio files can be streamed instead. This means they are accessed from the disk (hard drive)

This can save using RAM

There is a slight delay when accessing (reading from the disk is slow)

Works great for soundtracks and music



Audio in Video Games - Optimisation

Use mono over stereo where possible

Compress with a lossy audio format

Apply Nyquist-Shannon theorem

Use uncompressed WAV, which is equivalent to Pulse-code modulation (PCM), to save on CPU usage at the cost of the RAM budget

Use an Adaptive differential pulse-code modulation (ADPCM), for a slightly smaller RAM usage with the same CPU usage

Audio culling - do you need to run all that audio at once?