

# Mathematical Simulation of Blood Flow

A Literature Review and Idealized Stenosis Study

Daniel Henderson

Michigan Technological University

June 18, 2026

## **Abstract.**

This report develops a mathematical and numerical account of idealized stenotic blood-flow simulation. The framework fixes the continuum, constitutive, boundary-data, side-condition, model-hierarchy, and output conventions needed to relate three-dimensional (3D) incompressible Navier–Stokes, fluid–structure interaction, and generalized-Newtonian models to reduced 0D, 1D, 2D, and coupled hemodynamic formulations. The numerical record has two bounded parts: a  $T = 1$  resolved-velocity output-operator diagnostic for a selected 1D area–flow realization, and a package benchmark suite for the Julia solver and Python CLI surfaces. These computations support internal diagnostic and reproducibility claims only; they do not establish clinical pressure evidence, pressure-ratio accuracy, or resolved-3D validation.

## **Keywords:**

*computational hemodynamics, blood flow simulation, stenotic vessels, Navier–Stokes, reduced-order models, idealized stenosis*

# Contents

|          |                                                                       |           |
|----------|-----------------------------------------------------------------------|-----------|
| <b>1</b> | <b>Introduction</b>                                                   | <b>4</b>  |
|          | Literature Review Roadmap . . . . .                                   | 5         |
| 1.1      | Continuum and Constitutive Foundations . . . . .                      | 5         |
| 1.1.1    | Physiological scale and continuum idealization . . . . .              | 5         |
| 1.1.2    | Material derivative, transport, and balance laws . . . . .            | 7         |
| 1.2      | Governing Equations and Selected 1D Reduction . . . . .               | 11        |
| 1.2.1    | Conservation Laws and Navier–Stokes Specialization . . . . .          | 11        |
| 1.2.2    | Boundary Data and Well-Posedness Context . . . . .                    | 14        |
| 1.2.3    | Cross-Sectional Reduction and Selected 1D Model . . . . .             | 14        |
| 1.3      | Model Hierarchy and Comparison Boundary . . . . .                     | 19        |
| 1.3.1    | 0D Outlet and Network Models . . . . .                                | 19        |
| 1.3.2    | 1D Distributed Area–Flow Models . . . . .                             | 20        |
| 1.3.3    | 2D Intermediate Resolved-Flow Models . . . . .                        | 21        |
| 1.3.4    | 3D Fixed-Wall and Resolved-FSI Models . . . . .                       | 21        |
| 1.3.5    | Multiscale 3D–1D–0D Coupling . . . . .                                | 22        |
| 1.4      | Clinical Pressure–Flow Motivation . . . . .                           | 23        |
| <b>2</b> | <b>Preliminary Resolved-Velocity Diagnostic at <math>T = 1</math></b> | <b>26</b> |
| 2.1      | Package Benchmark Suite . . . . .                                     | 29        |
| <b>3</b> | <b>Conclusions and Limitations</b>                                    | <b>34</b> |
| <b>A</b> | <b>Acronyms and Abbreviations</b>                                     | <b>35</b> |
| <b>B</b> | <b>Mathematical Notation</b>                                          | <b>36</b> |
| <b>C</b> | <b>Domain Specific Notation</b>                                       | <b>38</b> |
| <b>D</b> | <b>Mathematical Foundations</b>                                       | <b>47</b> |

|          |                                                          |           |
|----------|----------------------------------------------------------|-----------|
| <b>E</b> | <b>Continuum Derivation Details</b>                      | <b>52</b> |
| E.1      | Material Derivative and Trajectory Details . . . . .     | 52        |
| E.2      | Jacobian Evolution and Reynolds Transport . . . . .      | 52        |
| E.3      | Linear Momentum Balance Details . . . . .                | 53        |
| <b>F</b> | <b>Navier–Stokes Coordinate and Energy Details</b>       | <b>55</b> |
| F.1      | Viscous-Term Simplification and Energy Context . . . . . | 55        |
| F.2      | Cylindrical Coordinate Form . . . . .                    | 55        |
| <b>G</b> | <b>Numerical Methods Details</b>                         | <b>57</b> |
| G.1      | Elastic-potential balance-law form . . . . .             | 57        |
| G.2      | Semi-discrete solver operator . . . . .                  | 58        |
| G.3      | Time-integration realization . . . . .                   | 59        |
| G.4      | Boundary-state realization . . . . .                     | 60        |
| G.5      | Residual diagnostics . . . . .                           | 61        |
| <b>H</b> | <b>Code Availability and Build Statement</b>             | <b>62</b> |

# 1 Introduction

Coronary and arterial stenoses motivate a basic computational question: how do geometry, wall properties, rheology, and boundary data determine the state of blood flow through a narrowed vessel? Clinical pressure-ratio measurements show why anatomical narrowing alone does not determine functional obstruction, but this report stays on the mathematical and numerical side of that problem. Its goal is to review the hierarchy of the single-vessel hemodynamic models and to present bounded numerical diagnostics for an idealized ( $C^\infty$ ) model of stenosed vessels.

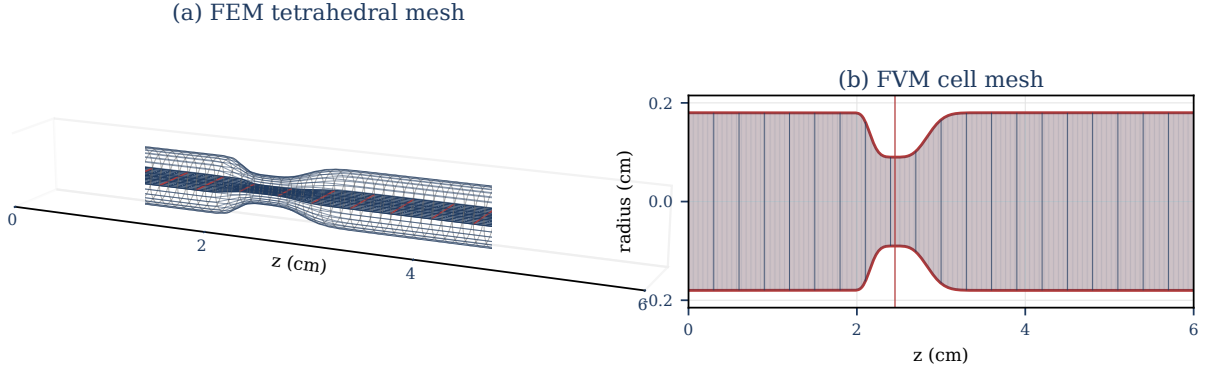


Figure 1: Finite-element and finite-volume views of the same smooth idealized stenosis geometry used in this report. Panel (a) shows the generated tetrahedral Gridap mesh for the stationary-Stokes initializer; panel (b) shows the one-dimensional finite-volume grid sampled along the reference radius profile  $R_0(z)$ . The takeaway is that one declared geometry can feed distinct discretizations; the panels show geometry only, not velocity, pressure-drop, pressure-ratio, or patient-specific clinical data.

The report fixes the vocabulary needed to move from continuum assumptions, to the three-dimensional incompressible Navier–Stokes and generalized-Newtonian settings, to reduced 0D/1D/2D hemodynamic model classes, and finally to a selected one-dimensional numerical record for an idealized stenosis. Its contribution is to organize the relevant mathematical and numerical literature, frame a controlled resolved-velocity diagnostic for a smooth idealized stenosed vessel, and record package-benchmark evidence for the implemented solver and CLI surfaces.

Pressure-ratio quantities in this report are computed model outputs, not clinical FFR or CT-FFR measurements, unless an external measurement comparison is explicitly introduced. Convention C.3 in Appendix C records the pressure-reference, gauge-pressure, high-flow-window, and admissibility conventions used for any reduced pressure-ratio output. The numerical record in Section 2 reports a velocity diagnostic and package benchmark suite only; it does not yet report pressure-drop or pressure-ratio outputs. Those conventions are included to fix the output vocabulary for subsequent reduced-order studies.

## Literature Review Roadmap

- Section 1.1 fixes the continuum, kinematic, balance-law, and constitutive assumptions used throughout the report.
- Section 1.2 states the governing incompressible Navier–Stokes and generalized-Newtonian setting and then records the selected one-dimensional area–flow reduction.
- Section 1.3 places 0D, 1D, 2D, 3D, and multiscale models into a comparison hierarchy and clarifies what each tier can and cannot support. Section 1.4 motivates pressure-drop, pressure-ratio, and shear-output conventions from the clinical anatomy–function distinction.
- Section 2 reports the preliminary resolved-velocity diagnostic at  $T = 1$  and the package benchmark suite. Section 3 summarizes the limitations and identifies the next evidence needed for stronger pressure–flow claims.

### 1.1 Continuum and Constitutive Foundations

This section moves from the macroscopic scale assumption, to continuum field variables, to blood-dynamics kinematics, to balance-law vocabulary, and finally to Newtonian versus generalized-Newtonian stress closures.

#### 1.1.1 Physiological scale and continuum idealization

The present work is posed at the macrocirculatory arterial scale. At this scale, blood is commonly modeled as a viscous fluid whose bulk behavior can be described by continuum mechanics. The point is not to resolve individual red blood cells, platelets, or plasma constituents. Instead, the model aims to predict macroscopic observables such as flow rate, pressure, pressure drop, pressure ratio, and velocity profiles under declared assumptions. This scale separation is standard in large-vessel hemodynamic modeling, while the small-vessel and low-shear regimes require additional rheological caution [1, 2, 3].

For a final time  $T_{\text{final}} > 0$ , let  $I_T := (0, T_{\text{final}})$  denote the open interior-time interval and  $\bar{I}_T := [0, T_{\text{final}}]$  denote the closed interval used for initial data and flow maps. Define the time-dependent blood domain and its spatial-temporal domain as:

$$\begin{cases} \Omega_B(t) := \{\mathbf{x} \in \mathbb{R}^3 : \mathbf{x} \text{ lies inside the vessel at time } t\} \\ \mathcal{Q}_T := \{(t, \mathbf{x}) : t \in I_T, \mathbf{x} \in \Omega_B(t)\}. \end{cases}$$

The reference and current configurations are denoted  $\Omega_B(0)$  and  $\Omega_B(t)$ , respectively, with  $\Omega_B(t)$  depending on time  $t \in \bar{I}_T$ . This domain notation is defined in Appendix B; boundary and function-space conventions are summarized in Appendix D. In this report, the continuum assumption is a large-vessel idealization:

individual blood cells, platelets, and plasma constituents are not resolved, and blood velocity, pressure, density, and Cauchy stress are represented by sufficiently regular fields on  $\mathcal{Q}_T$ . Cellular-scale effects may enter only through later constitutive choices [2, Part I, Ch. 1, Secs. 1.1–1.2, pp. 4–5] [1, Secs. 1.1.3 and 3.2, pp. 12–14 and 46–47]. The definitions below fix the continuum contract used by the later model hierarchy.

**Assumption 1.1** (Blood-dynamics kinematic setting). For  $t \in \bar{I}_T$ , blood motion is represented by a sufficiently regular orientation-preserving diffeomorphism

$$\mathcal{L}_t : \Omega_B(0) \rightarrow \Omega_B(t), \quad \det \nabla_{\boldsymbol{\xi}} \mathcal{L}_t > 0$$

It carries each material label  $\boldsymbol{\xi}$  to its current location  $\boldsymbol{x}(t, \boldsymbol{\xi}) = \mathcal{L}_t(\boldsymbol{\xi})$ . The Eulerian velocity field  $\boldsymbol{u} : \mathcal{Q}_T \rightarrow \mathbb{R}^3$  satisfies

$$\partial_t \mathcal{L}_t(\boldsymbol{\xi}) = \boldsymbol{u}(t, \mathcal{L}_t(\boldsymbol{\xi})).$$

The accompanying continuum fields are pressure  $p : \mathcal{Q}_T \rightarrow \mathbb{R}$ , density  $\rho : \mathcal{Q}_T \rightarrow \mathbb{R}^+$ , and Cauchy stress  $\boldsymbol{T} : \mathcal{Q}_T \rightarrow \mathbb{R}^{3 \times 3}$ .

Figure 2 summarizes the change of viewpoint from material labels to Eulerian field evaluation.

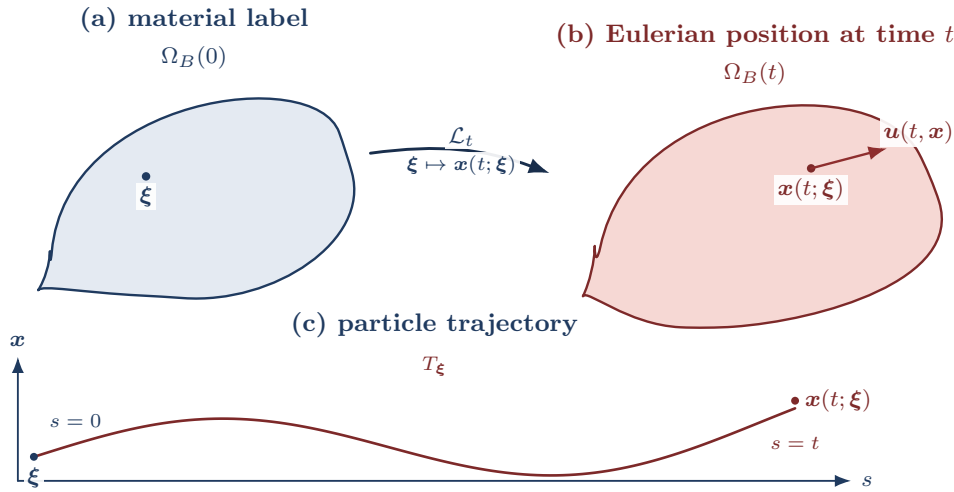


Figure 2: Lagrangian-to-Eulerian flow-map notation. The map  $\mathcal{L}_t : \Omega_B(0) \rightarrow \Omega_B(t)$  sends a material label  $\boldsymbol{\xi}$  to the current spatial point  $\boldsymbol{x}(t; \boldsymbol{\xi}) = \mathcal{L}_t(\boldsymbol{\xi})$ . The Eulerian velocity field is then evaluated at the occupied point, so the particle velocity satisfies  $\partial_t \boldsymbol{x}(t; \boldsymbol{\xi}) = \boldsymbol{u}(t, \boldsymbol{x}(t; \boldsymbol{\xi})) = \boldsymbol{u}(t, \mathcal{L}_t(\boldsymbol{\xi}))$ . The lower curve  $T_{\boldsymbol{\xi}}$  records the same labelled particle over  $s \in \bar{I}_T$ , from  $\boldsymbol{\xi}$  at  $s = 0$  to  $\boldsymbol{x}(t; \boldsymbol{\xi})$  at  $s = t$ .

*Remark 1.2* (Eulerian vs. Lagrangian). The Eulerian description views fields such as  $\phi(t, \boldsymbol{x})$  or  $\boldsymbol{u}(t, \boldsymbol{x})$  at fixed spatial locations. The Lagrangian description follows material particles  $\boldsymbol{\xi}$  along trajectories generated by the velocity field and views fields as functions of the material label  $\boldsymbol{\xi}$  and time  $t$ , such as  $\hat{\phi}(t, \boldsymbol{\xi}) = \phi(t, \mathcal{L}_t(\boldsymbol{\xi}))$  or  $\hat{\boldsymbol{u}}(t, \boldsymbol{\xi}) = \boldsymbol{u}(t, \mathcal{L}_t(\boldsymbol{\xi}))$ . The flow map  $\mathcal{L}_t$  is the change of variables between these descriptions, and the trajectory of a particle with label  $\boldsymbol{\xi}$  is the characteristic curve  $t \mapsto \boldsymbol{x}(t; \boldsymbol{\xi}) = \mathcal{L}_t(\boldsymbol{\xi})$ . Where defined, the

inverse  $\mathcal{L}_t^{-1}$  maps an Eulerian location back to its material label.

Classical identities in this report are read under the standing regularity convention in Convention D.1. For trajectory existence and uniqueness, the standard ODE hypothesis is that the prescribed velocity field is continuous in time and uniformly Lipschitz in space; under that condition, particle trajectories exist uniquely and depend continuously on their initial labels [4, Ch. 2].

### 1.1.2 Material derivative, transport, and balance laws

**Definition 1.3** (Material derivative). For  $\phi \in C^1(\mathcal{Q}_T)$ , the material derivative is the derivative along a particle trajectory:

$$D_t\phi(t, \mathbf{x}) := \frac{d}{dt}\phi(t, \mathcal{L}_t(\boldsymbol{\xi})) = \partial_t\phi(t, \mathbf{x}) + \mathbf{u}(t, \mathbf{x}) \cdot \nabla\phi(t, \mathbf{x}), \quad \boldsymbol{\xi} = \mathcal{L}_t^{-1}(\mathbf{x}).$$

For vector fields, the material derivative is applied componentwise. Let  $\widehat{\mathbf{F}}_t = \nabla_{\boldsymbol{\xi}}\mathcal{L}_t$  and  $\widehat{J}_t = \det \widehat{\mathbf{F}}_t$ . In Eulerian notation this is written  $\mathbf{F}_t(\mathbf{x}) = \widehat{\mathbf{F}}_t(\mathcal{L}_t^{-1}(\mathbf{x}))$  and  $J_t(\mathbf{x}) = \det \mathbf{F}_t(\mathbf{x}) = \det \widehat{\mathbf{F}}_t(\mathcal{L}_t^{-1}(\mathbf{x}))$ . The standard Jacobian evolution law is

$$D_t J_t = J_t \operatorname{div} \mathbf{u}.$$

This Jacobian identity supports the Reynolds transport theorem. Mass conservation is the separate balance law that gives the continuity equation used below; in the constant-density specialization, that equation reduces to the divergence-free constraint. Derivation details are deferred to Appendix E.

**Theorem 1.4** (Reynolds Transport Theorem). *Let  $V(t) = \mathcal{L}_t(V(0))$  be a bounded material volume with Lipschitz boundary. If  $\phi \in C^1(\mathcal{Q}_T)$ , then*

$$\begin{aligned} \frac{d}{dt} \int_{V(t)} \phi \, d\mathbf{x} &= \int_{V(t)} (D_t\phi + \phi \operatorname{div} \mathbf{u}) \, d\mathbf{x} \\ &= \int_{V(t)} (\partial_t\phi + \operatorname{div}(\phi \mathbf{u})) \, d\mathbf{x}. \end{aligned}$$

Proof-level details for Theorem 1.4 and the momentum balance below are found in Appendix E. Assumption 1.1 supplies the 3D velocity, pressure, density, and stress fields used below. Mass conservation and linear momentum balance are imposed on material volumes and then localized to obtain the balance equations used in the model hierarchy.

**Definition 1.5** (Material density preservation). A flow has material density preservation if density is preserved along particle trajectories:

$$D_t \rho = 0.$$

**Definition 1.6** (Incompressible flow). A flow is incompressible, or volume preserving, if material volumes are preserved. With  $\mathcal{L}_0 = \text{Id}$  this is equivalent to

$$J_t \equiv 1 \iff \text{div} \mathbf{u} = 0.$$

*Remark 1.7* (Divergence-free condition). Mass conservation gives

$$\partial_t \rho + \text{div}(\rho \mathbf{u}) = 0 \iff D_t \rho + \rho \text{div} \mathbf{u} = 0.$$

In the constant-density model used for incompressible Navier–Stokes,  $\rho \equiv \rho_0 > 0$ , so mass conservation reduces to  $\text{div} \mathbf{u} = 0$  in  $\mathcal{Q}_T$ .

**Definition 1.8** (Linear momentum balance). For a material fluid element  $V(t) \subset \Omega_B(t)$ , the linear momentum balance is

$$\frac{d}{dt} \int_{V(t)} \rho \mathbf{u} dV = \int_{\partial V(t)} \mathbf{T} \hat{\mathbf{n}} dS + \int_{V(t)} \rho \mathbf{f}_b dV,$$

where  $\mathbf{T}$  is the Cauchy stress tensor and  $\mathbf{f}_b$  is body force per unit mass.

**Definition 1.9** (Strong momentum balance). Under the regularity and mass-balance assumptions above, the local momentum balance is

$$\rho (\partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u}) = \text{div}(\mathbf{T}) + \rho \mathbf{f}_b, \quad \text{in } \Omega_B(t).$$

The stress law closes the momentum equation. Let the rate-of-deformation tensor be

$$\mathbf{D}(\mathbf{u}) := \frac{1}{2} (\nabla \mathbf{u} + \nabla \mathbf{u}^\top).$$

**Definition 1.10.** A fluid is Newtonian if, after separating the pressure contribution, its viscous stress depends linearly on the rate-of-deformation tensor  $\mathbf{D}(\mathbf{u})$ .

*Remark 1.11* (Blood isotropy justification). Blood is often modeled as an isotropic continuum fluid at large-vessel scales. This is a closure assumption for averaged behavior, not a microscopic statement about cells suspended in plasma. The cited sources support the scale and rheology caveat: nearly constant large-vessel relative viscosity versus diameter- and hematocrit-dependent apparent viscosity in small tubes, not a direct cellular-level isotropy claim [1, Sec. 1.1.3, Fig. 1.14, pp. 12–14, Sec. 3.2, pp. 46–47] [3, Abstract, pp. H1770–H1772].

*Remark 1.12* (Isotropic constitutive response). An isotropic fluid has a constitutive response that is independent of the chosen coordinate system. Consequently, the Cauchy stress depends on coordinate-free invariants of  $\mathbf{D}(\mathbf{u})$  rather than on a particular basis.

**Definition 1.13** (Newtonian, isotropic constitutive law). For a Newtonian, isotropic fluid,

$$\mathbf{T} = -p\mathbf{I} + 2\eta \mathbf{D}(\mathbf{u}) + \lambda \operatorname{div}(\mathbf{u}) \mathbf{I},$$

where  $\eta$  is the dynamic viscosity and  $\lambda$  is the coefficient of the volumetric-viscous term.

**Definition 1.14** (Incompressible stress tensor). When  $\operatorname{div} \mathbf{u} = 0$ , the Newtonian incompressible Cauchy stress is

$$\mathbf{T} = -p\mathbf{I} + 2\eta \mathbf{D}(\mathbf{u}).$$

Generalized-Newtonian blood models keep the stress-level constitutive form but allow the dynamic viscosity to depend on the local deformation-rate magnitude [2, Part I, Ch. 1, Secs. 2.7–3.1, pp. 16–19]. With the shear-rate convention

$$\dot{\gamma} := \sqrt{2\mathbf{D}(\mathbf{u}) : \mathbf{D}(\mathbf{u})},$$

the incompressible generalized-Newtonian Cauchy stress is

$$\mathbf{T} = -p\mathbf{I} + 2\eta_{\text{eff}}(\dot{\gamma})\mathbf{D}(\mathbf{u}).$$

The pointwise Frobenius norm convention is

$$\|\mathbf{D}(\mathbf{u})\|^2 := \mathbf{D}(\mathbf{u}) : \mathbf{D}(\mathbf{u}) = \sum_{i,j} D_{ij}(\mathbf{u})^2$$

When a source writes the viscosity as a function of  $D : D$  or  $|D|_{\text{F}}^2$ , this report translates it through the scalar shear-rate convention above. The coefficient  $\eta_{\text{eff}}$  is an effective dynamic viscosity; dividing by density gives the corresponding kinematic viscosity. The Newtonian incompressible model is recovered from this generalized Newtonian form when  $\eta_{\text{eff}}$  is constant.

**Definition 1.15** (Implemented effective-viscosity closure catalog). A computed 1D realization uses the rheology descriptor  $\mathcal{R}$  to choose an implemented scalar effective dynamic-viscosity law  $\eta_{\text{eff}}^{\mathcal{R}}(\dot{\gamma})$ . The admitted descriptor values are `newtonian`, `carreau`, `carreau-yasuda`, `casson`, and `power-law`. The displayed superscripts abbreviate these descriptors, with `newt`, `CY`, and `power` denoting `newtonian`, `carreau-yasuda`, and `power-law`. This catalog defines the scalar dynamic-viscosity laws. A computed 1D realization evaluates the selected law on the shear-rate proxy in Appendix G and forms the closure-indexed kinematic viscosity  $\nu_{\text{eff}}^{\mathcal{R}} = \eta_{\text{eff}}^{\mathcal{R}}/\rho$ . Assumption 1.28 records that the velocity profile, friction law, rheology descriptor, and wall closure are part of the closed model specification. For computed non-Newtonian realizations, the laws are

evaluated at the positive regularized shear rate

$$\dot{\gamma}_\epsilon := \max\{|\dot{\gamma}|, \epsilon_\gamma\}, \quad \epsilon_\gamma > 0, \quad [\epsilon_\gamma] = \text{s}^{-1}.$$

This positive regularization is required for the Casson and power-law families when their zero-shear limits are singular or degenerate. For descriptors that declare dynamic-viscosity bounds, the bounds satisfy  $0 \leq \eta_{\min} \leq \eta_{\max} \leq \infty$  with  $\eta_{\max} > 0$  and define the interval projection

$$\Pi_{[\eta_{\min}, \eta_{\max}]}(\xi) := \min\{\eta_{\max}, \max\{\eta_{\min}, \xi\}\}.$$

The bounded viscosity is then  $\Pi_{[\eta_{\min}, \eta_{\max}]}(\eta_{\text{eff}}^{\mathcal{R}}(\dot{\gamma}))$ ; without declared bounds, this projection is the identity on the displayed model law.

$$\begin{aligned} \eta_{\text{eff}}^{\text{newt}} &\equiv \eta, \\ \eta_{\text{eff}}^{\text{carreau}}(\dot{\gamma}) &= \eta_\infty + (\eta_0 - \eta_\infty) (1 + (\lambda_C \dot{\gamma}_\epsilon)^2)^{(n_C - 1)/2}, \\ \eta_{\text{eff}}^{\text{CY}}(\dot{\gamma}) &= \eta_\infty + (\eta_0 - \eta_\infty) (1 + (\lambda_{\text{CY}} \dot{\gamma}_\epsilon)^{a_Y})^{(n_{\text{CY}} - 1)/a_Y}, \\ \eta_{\text{eff}}^{\text{casson}}(\dot{\gamma}) &= \left( \sqrt{\tau_y / \dot{\gamma}_\epsilon} + \sqrt{\eta_p} \right)^2, \\ \eta_{\text{eff}}^{\text{power}}(\dot{\gamma}) &= K_{\text{pl}} \dot{\gamma}_\epsilon^{n_{\text{pl}} - 1}. \end{aligned}$$

In the computed Newtonian path, the constant dynamic viscosity is  $\eta = \rho\nu$ , so the closure-indexed kinematic viscosity reduces to  $\nu$ . The parameter domains are

$$\eta_0 > 0, \quad \eta_\infty \geq 0, \quad \eta_0 \geq \eta_\infty, \quad \lambda_C, \lambda_{\text{CY}} \geq 0, \quad n_C, n_{\text{CY}} > 0, \quad a_Y > 0,$$

for the Carreau and Carreau–Yasuda families,

$$\tau_y \geq 0, \quad \eta_p > 0$$

for Casson, and

$$K_{\text{pl}} > 0, \quad n_{\text{pl}} > 0$$

for the power-law closure. Under the SI convention,  $\eta$ ,  $\eta_0$ ,  $\eta_\infty$ ,  $\eta_p$ ,  $\eta_{\min}$ , and  $\eta_{\max}$  have units  $\text{Pa} \cdot \text{s}$ ,  $\lambda_C$  and  $\lambda_{\text{CY}}$  have units  $\text{s}$ ,  $\tau_y$  has units  $\text{Pa}$ , and  $K_{\text{pl}}$  has units  $\text{Pa} \cdot \text{s}^{n_{\text{pl}}}$ . In the cgs numerical convention of Convention C.2, the corresponding dynamic-viscosity parameters are in  $\text{g}/(\text{cm} \cdot \text{s})$ ,  $\tau_y$  is in  $\text{dyn}/\text{cm}^2$ , and  $K_{\text{pl}}$  is in  $\text{dyn} \cdot \text{s}^{n_{\text{pl}}}/\text{cm}^2$ . The Yasuda transition exponent is denoted  $a_Y$  here so that it is not confused with the solver coordinate  $a = R^2$  used in the reduced numerical realization. The listed families are the implemented

generalized-Newtonian viscosity options used by this report’s closure catalog; their parameter values are model-record data rather than universal constants [2, Part I, Ch. 1, Secs. 2.7–3.1, pp. 16–19] [5, 6].

*Remark 1.16* (Newtonian blood justification). For large arteries, empirical studies suggest that apparent viscosity is often approximately constant across the relevant operating range, motivating the Newtonian approximation in many reduced-order hemodynamic models. However, diameter-dependent, hematocrit-dependent, and shear-dependent effects become increasingly important in smaller vessels and low-shear regions [1, Sec. 1.1.3, pp. 12–14] [3].

Together, Assumption 1.1 and the balance-law and stress-closure definitions in this subsection form the continuum contract used by the following hierarchy: material volumes and Reynolds transport support the mass and momentum balances, while incompressibility and the selected constitutive law specialize those balances into the PDE tiers that are later reduced by cross-sectional averaging.

## 1.2 Governing Equations and Selected 1D Reduction

The continuum assumptions of Section 1.1 lead to a layered modeling hierarchy. In particular, Assumption 1.1 supplies the flow map, material volumes, and continuum fields on which the conservation laws act. The high-fidelity starting point is the incompressible Navier–Stokes or generalized-Newtonian system on a three-dimensional lumen. The report then uses cross-sectional reduction to identify the selected 1D area-flow variables and to state the closure assumptions that must be fixed before any reduced numerical study is interpreted.

### 1.2.1 Conservation Laws and Navier–Stokes Specialization

The governing equations originate from conservation of mass and linear momentum applied to material volumes under Assumption 1.1, followed by the constant-density incompressible specialization. The derivation details and row-divergence convention are recorded in Appendix E and Definition D.6. Figure 3 summarizes the route from these balance laws to the forms used in the report [2, Part I, Ch. 1, Secs. 2.2–3.1, pp. 11–19, Part IV, Ch. 1, Sec. 1.1, pp. 380–383] [7, Sec. 6].

With this kinematic setting fixed, mass conservation for the constant-density incompressible model gives

$$\operatorname{div} \mathbf{u} = 0 \quad \text{in } \Omega_B(t).$$

Linear momentum conservation balances inertia, pressure, viscous stress, and body forces:

$$\rho(\partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u}) = \operatorname{div}(\mathbf{T}) + \rho \mathbf{f}_b.$$

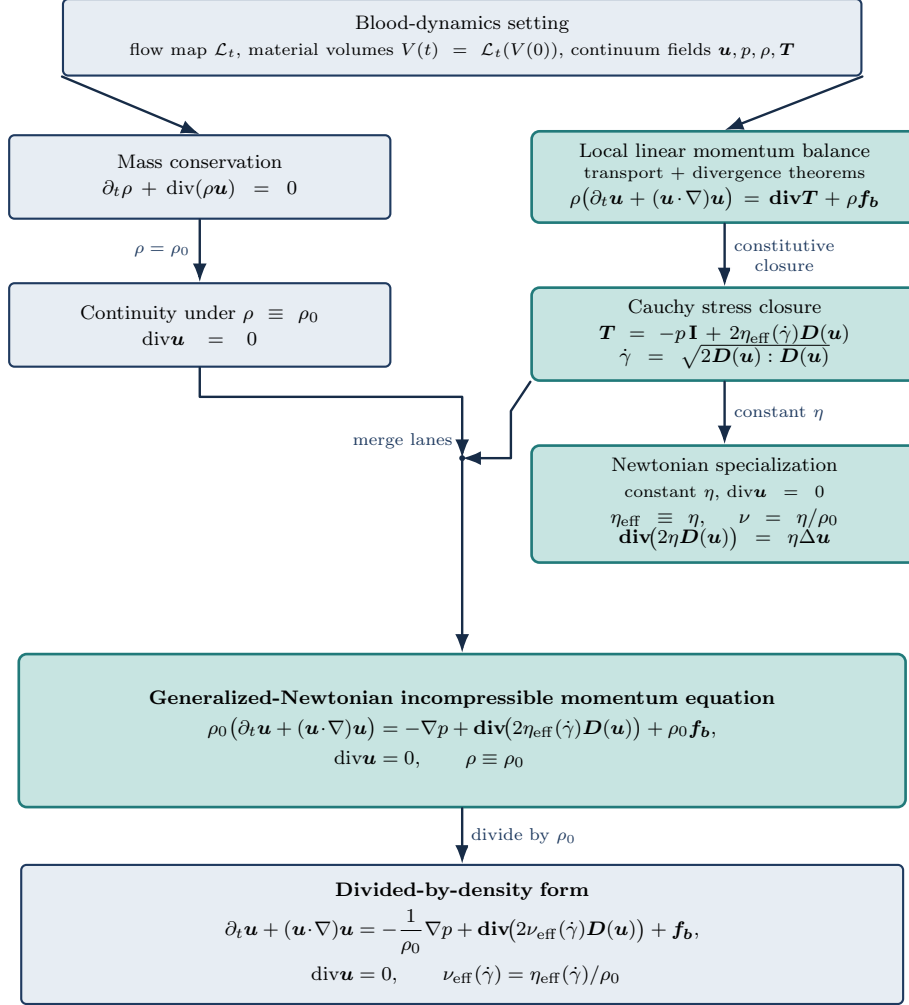


Figure 3: From the blood-dynamics setting to incompressible Navier–Stokes. The flow-map and material-volume assumptions support the conservation statements. The mass-conservation/incompressibility lane and the stress-closure lane merge into the generalized-Newtonian incompressible momentum form. The Newtonian box is a constant-viscosity specialization, and the divided-by-density form records the corresponding kinematic-viscosity scaling.

Throughout the Navier–Stokes statements below,  $\mathbf{f}_b$  denotes body force per unit mass, so  $\rho \mathbf{f}_b$  is the corresponding body force per unit volume.

**Definition 1.17** (Conservative incompressible Navier–Stokes). On  $\Omega_B(t)$ , the constant-density Newtonian system may be written in conservative tensor-divergence form as

$$\begin{cases} \partial_t(\rho \mathbf{u}) + \text{div}(\rho \mathbf{u} \otimes \mathbf{u}) = -\nabla p + \text{div}(2\eta \mathbf{D}(\mathbf{u})) + \rho \mathbf{f}_b, \\ \text{div} \mathbf{u} = 0, \quad \rho \equiv \rho_0 > 0. \end{cases}$$

For constant density and divergence-free velocity,  $\text{div}(\rho \mathbf{u} \otimes \mathbf{u}) = \rho(\mathbf{u} \cdot \nabla) \mathbf{u}$ . Thus the same Newtonian momentum equation can be read in advective form.

**Definition 1.18** (Generalized-Newtonian incompressible Navier–Stokes). For an incompressible generalized-Newtonian fluid, use the shear-rate convention

$$\dot{\gamma} := \sqrt{2\mathbf{D}(\mathbf{u}) : \mathbf{D}(\mathbf{u})}.$$

The velocity  $\mathbf{u}$ , pressure  $p$ , body force per unit mass  $\mathbf{f}_b$ , and constant density  $\rho \equiv \rho_0 > 0$  satisfy

$$\begin{cases} \rho(\partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u}) = -\nabla p + \mathbf{div}(2\eta_{\text{eff}}(\dot{\gamma}) \mathbf{D}(\mathbf{u})) + \rho \mathbf{f}_b, \\ \mathbf{div} \mathbf{u} = 0. \end{cases}$$

**Definition 1.19** (Density-scaled generalized Navier–Stokes). With  $\nu_{\text{eff}}(\dot{\gamma}) := \eta_{\text{eff}}(\dot{\gamma})/\rho$ , the divided-by-density form is

$$\begin{cases} \partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u} = -\rho^{-1} \nabla p + \mathbf{div}(2\nu_{\text{eff}}(\dot{\gamma}) \mathbf{D}(\mathbf{u})) + \mathbf{f}_b, \\ \mathbf{div} \mathbf{u} = 0. \end{cases}$$

The density-scaled form is particularly useful for numerical simulations, because it separates the convective  $((\mathbf{u} \cdot \nabla) \mathbf{u})$  and diffusive / viscous-stress  $(\mathbf{div}(2\nu_{\text{eff}}(\dot{\gamma}) \mathbf{D}(\mathbf{u})))$  contributions in the momentum equation, allowing for more straightforward numerical treatment of each term independently.

**Definition 1.20** (Newtonian incompressible Navier–Stokes). If  $\eta_{\text{eff}} \equiv \eta$  is constant, then sufficiently smooth divergence-free velocity fields satisfy  $\mathbf{div}(2\eta \mathbf{D}(\mathbf{u})) = \eta \Delta \mathbf{u}$ . The Newtonian equations are

$$\begin{cases} \rho(\partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u}) = -\nabla p + \eta \Delta \mathbf{u} + \rho \mathbf{f}_b, \\ \mathbf{div} \mathbf{u} = 0, \end{cases} \quad \begin{cases} \partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u} = -\rho^{-1} \nabla p + \nu \Delta \mathbf{u} + \mathbf{f}_b, \\ \mathbf{div} \mathbf{u} = 0, \end{cases}$$

where  $\nu := \eta/\rho$ .

Thus the 3D PDE tier is not introduced independently: flow maps and material volumes support Reynolds transport, Reynolds transport gives mass and momentum balance, the Cauchy stress law closes momentum, and incompressibility selects the Navier–Stokes systems above.

*Remark 1.21* (Navier–Stokes system classification). Navier–Stokes is a nonlinear coupled PDE system. The unknowns are the three velocity components and pressure. The convective term transports momentum, the pressure gradient enforces incompressibility, and the viscous term diffuses momentum through the stress tensor.

### 1.2.2 Boundary Data and Well-Posedness Context

For a single-vessel three-dimensional domain, write the boundary decomposition

$$\partial\Omega_B(t) = \Gamma_{\text{in}}(t) \cup \Gamma_{\text{out}}(t) \cup \Gamma_w(t).$$

Here  $\Gamma_{\text{in}}(t)$  denotes an inlet portion where a velocity, flow-rate, or profile condition may be prescribed. The outlet portion  $\Gamma_{\text{out}}(t)$  carries pressure, traction, or reduced downstream network data. For a fixed-wall no-slip continuum model, the wall portion  $\Gamma_w(t) \subset \partial\Omega_B(t)$  carries  $\mathbf{u} = 0$ ; this condition is not imposed on the inlet or outlet portions of  $\partial\Omega_B(t)$ . Other continuum or FSI tiers may use no-penetration, wall-law, or structure-coupling data instead. A complete initial-boundary value problem also states  $\mathbf{u}(0, \cdot) = \mathbf{u}_0$ , the domain, forcing, compatibility assumptions, and the solution class.

*Remark 1.22* (Global regularity context). For smooth, spatially localized initial data in three dimensions, global existence and smoothness for Navier–Stokes remains an open Clay Millennium Prize problem [8, Problem statement]. This is mathematical context for the 3D continuum model, not a direct limitation of the selected reduced 1D model introduced below.

Well-posedness results for a three-dimensional Navier–Stokes initial-boundary value problem are problem-specific: the statement must fix the domain class, boundary conditions, forcing, compatibility assumptions, initial-data space, solution class, and time horizon. This report uses that vocabulary only as PDE background for the model hierarchy. It does not use the Clay global-regularity problem as support for a local theorem, and it does not prove a well-posedness result for the moving arterial domain or for the reduced numerical solver. The domain and function-space notation relevant to such statements is summarized in Appendix D; coordinate and energy background is collected in Appendix F.

### 1.2.3 Cross-Sectional Reduction and Selected 1D Model

The 1D model reduces the spatial dimension by assuming that the vessel has a distinguished axial direction and that pressure and velocity can be averaged over cross-sections. This keeps pulse-wave and pressure-drop structure while discarding secondary flow, separation, recirculation, and resolved wall traction. The reduction follows standard compliant-artery and dimension-reduced modeling arguments [9, Sec. 2, pp. 253–257] [1, Ch. 3, Secs. 3.2 and 3.6] [10, Sec. 3, pp. 24–26]. The reduced variables  $A$ ,  $Q$ ,  $\bar{u}$ , and  $p_g$  should therefore be read as cross-sectional outputs of the continuum fields under additional averaging, geometry, wall-law, and profile assumptions, not as independent replacements for the blood-dynamics setting above.

**Assumption 1.23** (Straight single-vessel geometry). The selected 1D model assumes a vessel of length  $L$  aligned with the  $z$ -axis and a circular cross-section with radius  $R(z, t)$ . For  $0 < z < L$ ,  $S(z, t)$  is the interior cross-section used for averaging, not a boundary component of the open lumen.

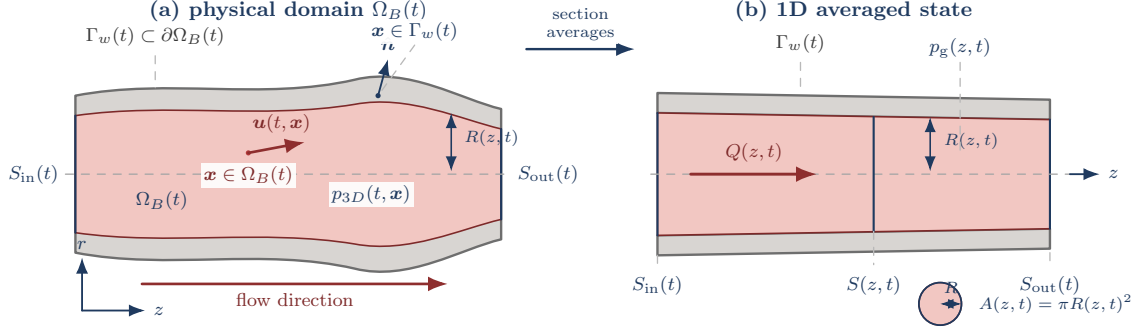


Figure 4: Compliant-vessel notation for the 1D reduction. The current configuration  $\Omega_B(t)$  is represented by a straightened averaging domain: section averages over  $S(z, t)$  define  $A(z, t)$ ,  $Q(z, t)$ ,  $\bar{u}(z, t)$ , and  $p_g(z, t)$ , while  $R(z, t)$  records the radius entering the wall and geometry closures. The figure is a bookkeeping reduction from continuum fields to retained 1D variables, not a resolved wall-traction or secondary-flow model.

**Definition 1.24** (Section-averaged 1D fields). The retained reduced variables are

$$\begin{aligned}
 A(z, t) &:= \int_{S(z, t)} 1 \, dS, & \text{cross-sectional area,} \\
 Q(z, t) &:= \int_{S(z, t)} u_z \, dS, & \text{volumetric flow rate,} \\
 \bar{u}(z, t) &:= \frac{Q(z, t)}{A(z, t)}, & \text{mean axial velocity,} \\
 p_g(z, t) &:= \frac{1}{A(z, t)} \int_{S(z, t)} p_{3D, g} \, dS, & \text{mean gauge pressure.}
 \end{aligned}$$

Here  $p_{3D, g}$  is continuum pressure in the wall-law gauge frame. The pressure-reference convention for reduced ratios is fixed separately in Convention C.3.

**Definition 1.25** (Wall and FSI closure catalog). The descriptor  $\mathcal{W}$  records how the wall or wall-reduced mechanics are closed. It is independent of the rheology descriptor  $\mathcal{R}$ :  $\mathcal{R}$  changes the stress or effective-viscosity law, while  $\mathcal{W}$  changes whether the vessel wall is fixed, algebraically reduced, coupled to another model tier, or resolved as a structure.

| Closure descriptor                 | Wall information retained                                                                                                            | Reading in this report                                                                                                                                                         |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $\mathcal{W}_{\text{rigid}}$       | Fixed or prescribed wall geometry; no structural state is solved                                                                     | A fixed-wall continuum or rigid-tube reduced baseline. This is not an FSI model, even when no-slip or no-penetration wall data are imposed.                                    |
| $\mathcal{W}_{\text{elastic1D}}$   | Dynamic area $A(z, t)$ , gauge pressure $p_g(A, z, t)$ , reference area $A_0(z)$ , wall stiffness $\beta(z)$ , and external pressure | The selected single-vessel model. Wall mechanics are reduced to a pressure–area law, wave speed, elastic potential, and geometry source; no separate structural PDE is solved. |
| $\mathcal{W}_{\text{multiscale}}$  | Interface pressure, flow, traction, or characteristic data coupling 0D, 1D, and 3D model tiers                                       | A boundary or coupling model requiring a separate interface and stability contract; it is not implied by the single-vessel flux/source notation.                               |
| $\mathcal{W}_{\text{resolvedFSI}}$ | Fluid velocity and pressure plus wall displacement, wall velocity, structural stress, and interface conditions                       | A full moving-wall FSI PDE system. It is a comparison tier for this report, not the selected reduced model.                                                                    |

This separation follows the standard distinction between reduced compliant vessel models, geometrical multiscale coupling, and resolved FSI models [9, Sec. 2, pp. 253–257] [11] [12].

**Definition 1.26** (Classical no-slip 1D baseline). The classical no-slip 1D baseline used as a model-family member starts from the fixed-wall continuum trace  $\mathbf{u} = 0$  on the wall boundary  $\Gamma_w \subset \partial\Omega_B$ , together with separate inlet and outlet data on  $\Gamma_{\text{in}}$  and  $\Gamma_{\text{out}}$ . After cross-sectional averaging, the no-slip antecedent is represented by the parabolic profile/friction convention  $\alpha_{\mathcal{P}} = 4/3$  and  $g_{\mathcal{P}} = 4$ . In the implementation manifests this member is recorded as `classical-1d-no-slip`; it keeps the same reduced state variables and wall-law axis as the selected 1D framework, but omits the Canic effective-alpha variable-radius correction. The descriptor `canic-extended-1d` records the current extended-model member.

**Definition 1.27** (Closed 1D area-flow model). For  $\mathcal{W} = \mathcal{W}_{\text{elastic1D}}$  and an incompressible fluid with density  $\rho$ , the working compliant single-vessel model is written with the composite axial pressure derivative

$$\frac{d}{dz} p_g(A(z, t), z, t) = \partial_A p_g(A, z, t) \partial_z A + \partial_z p_g(A, z, t)|_A.$$

The reduced balance law is

$$\partial_t A + \partial_z Q = 0, \tag{1.1}$$

$$\partial_t Q + \partial_z \left( \alpha \frac{Q^2}{A} \right) + \frac{A}{\rho} \frac{d}{dz} p_g(A(z, t), z, t) = -C_f(z, A, Q) \frac{Q}{A}. \tag{1.2}$$

The parameter  $\alpha$  is the momentum-flux correction factor induced by the selected cross-sectional velocity profile,  $C_f$  is the wall-friction closure, and  $p_g(A, z, t)$  is the wall-law gauge pressure closing the reduced

system. This is the reduced  $\mathcal{W}_{\text{elastic1D}}$  member of the FSI closure axis: wall response is represented through the pressure–area law rather than through a separate structural PDE [9, Sec. 2, pp. 253–255] [1, Ch. 3, Sec. 3.2, pp. 40–47].

**Assumption 1.28** (Velocity-profile and rheology closure). A closed 1D area-flow model must declare the momentum-flux correction factor  $\alpha$ , the wall-friction closure  $C_f$ , any rheology descriptor  $\mathcal{R}$ , and the pressure–area wall closure  $\mathcal{W}$ . These choices determine how cross-sectional profile effects, wall friction, viscosity or effective viscosity, and wall compliance enter the reduced equations. Numerical-record details such as solver coordinates, shear-rate proxies, and discrete source terms are deferred to Appendix G.

**Definition 1.29** (Elastic pressure–area wall law). The baseline pressure closure is the elastic wall law

$$p_g(A, z, t) = p_{\text{ext}}(z, t) + \frac{\beta(z)}{A_0(z)} \left( \sqrt{A(z, t)} - \sqrt{A_0(z)} \right). \quad (1.3)$$

Here  $A_0(z)$  is the reference area,  $p_{\text{ext}}$  is the external pressure, and  $\beta(z)$  is a wall-stiffness parameter. Some implementations absorb  $A_0^{-1}$  into  $\beta$ ; the essential closure is that  $p_g$  is known once  $A_0$ ,  $\beta$ , and  $p_{\text{ext}}$  are supplied. Resolved FSI would replace this algebraic pressure–area closure with structural unknowns and fluid–structure interface conditions.

**Definition 1.30** (Stenosis reference geometry). A stenosis is encoded through the reference radius or reference area. Let  $R_{\text{base}}(z)$  be the nominal healthy radius and  $s(z) \in [0, 1)$  a fractional radius-reduction profile. Then

$$R_0(z) = R_{\text{base}}(z)(1 - s(z)), \quad A_0(z) = \pi R_0(z)^2. \quad (1.4)$$

The baseline idealized stenotic-vessel profile is the smooth asymmetric kernel

$$g(z) = z - z_s + \kappa \exp \left( -\frac{(z - z_a)^2}{2\sigma_a^2} \right), \quad \psi(z) = \exp \left( -\lambda g(z)^4 \right), \quad (1.5)$$

$$s(z) = s_{\text{max}} \psi(z), \quad 0 \leq s_{\text{max}} < 1. \quad (1.6)$$

In the default centimeter-scale simulation record,  $z_a = 2.5$  cm,  $z_s = 3.4$  cm,  $\sigma_a = 1$  cm,  $\kappa = 0.95$  cm, and  $\lambda = 50 \text{ cm}^{-4}$ . This geometry is the baseline idealized simulation geometry in this report, not a patient-specific plaque morphology or clinical calibration.

*Remark 1.31* (Stenosis-profile and variable-radius boundary). The profile in Eq. 1.6 is  $C^\infty$  and rapidly localized rather than compactly supported. This smooth idealized geometry is the baseline for the reduced simulations in this report. Canic et al. show that standard 1D variable-geometry models may miss stenotic pressure and velocity trends unless additional variable-radius terms are included [13, Abstract, Secs. 1–2]. Those corrections motivate later comparison questions, but they are not included in the baseline model unless a separate closure identifier and numerical contract are declared.

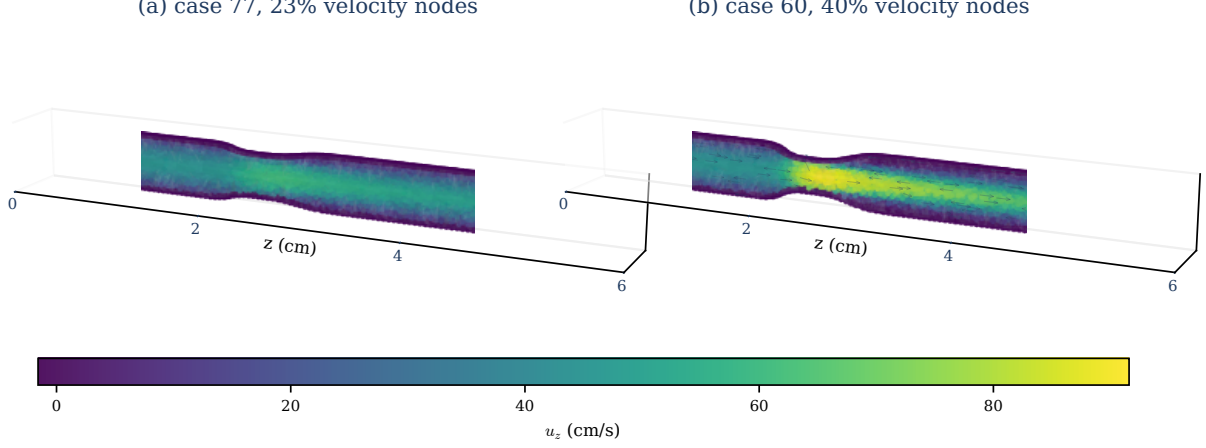


Figure 5: Resolved 3D node-centered axial velocity fields for the two  $T = 1$  comparison cases used in Section 2. Panel (a) shows case 77 with 22,691 loaded nodes; panel (b) shows case 60 with 21,975 loaded nodes. The shared color scale makes the stronger axial-velocity concentration in the 40% case visible. Sparse arrows indicate local vector direction, and the transparent surface frames the 3D point cloud. These are resolved velocity-data renderings, not the stationary-Stokes pathline proxy or a pressure-drop, FFR, or patient-specific clinical calibration measurement.

**Definition 1.32** (Conservative flux/source notation for the reduced wall law). For a reduced wall closure  $\mathcal{W}$  admitting an elastic potential, define

$$\mathbf{U} = (A, Q)^\top, \quad \mathbf{F}_{\mathcal{W}}(\mathbf{U}, z, t) = \begin{pmatrix} Q \\ \alpha Q^2/A + \Psi_{\mathcal{W}}(A, z, t) \end{pmatrix},$$

$$\mathbf{S}_{\mathcal{W}, \mathcal{R}}(\mathbf{U}, z, t) = \begin{pmatrix} 0 \\ S_{\text{geom}}^{\mathcal{W}}(A, z, t) + S_f^{\mathcal{R}}(A, Q, z) \end{pmatrix}.$$

The potential and sources are tied to the selected closure descriptors by

$$\begin{aligned} \partial_A \Psi_{\mathcal{W}}(A, z, t) &= \frac{A}{\rho} \partial_A p_g^{\mathcal{W}}(A, z, t), \\ S_{\text{geom}}^{\mathcal{W}}(A, z, t) &= \partial_z \Psi_{\mathcal{W}}(A, z, t)|_A - \frac{A}{\rho} \partial_z p_g^{\mathcal{W}}(A, z, t)|_A, \\ S_f^{\mathcal{R}}(A, Q, z) &= -C_f^{\mathcal{R}}(z, A, Q) \frac{Q}{A}. \end{aligned}$$

For  $\mathcal{W}_{\text{elastic1D}}$ ,  $p_g^{\mathcal{W}}$  is the wall law in Definition 1.29. In component form,

$$\partial_t A + \partial_z Q = 0, \tag{1.7}$$

$$\partial_t Q + \partial_z \left( \alpha \frac{Q^2}{A} + \Psi_{\mathcal{W}}(A, z, t) \right) = S_{\text{geom}}^{\mathcal{W}}(A, z, t) + S_f^{\mathcal{R}}(A, Q, z), \tag{1.8}$$

The wall/FSI descriptor  $\mathcal{W}$  determines the pressure–area law, elastic potential, wave speed, and geometry source; the rheology descriptor  $\mathcal{R}$  determines the viscosity or friction closure. A resolved FSI model is therefore not obtained by merely relabeling  $S_{\text{geom}}$ : it introduces structural state and interface laws. The displayed split records the balance-law objects needed by finite-volume schemes, while a computed realization may still use a particular well-balanced or source-split discretization [14] [15, Summary, Secs. 2.1–2.3, Secs. 5–6] [12].

**Definition 1.33** (Single-vessel boundary data). For a single-vessel solve on  $z \in [0, L]$ , prescribe one inlet condition and one outlet condition:

$$\begin{aligned} Q(0, t) = Q_{\text{in}}(t) \quad \text{or} \quad \bar{u}(0, t) = \bar{u}_{\text{in}}(t), \\ p_g(L, t) = p_{\text{out},g}(t) \quad \text{or} \quad p_g(L, t) = p_{\text{WK},g}(Q(L, \cdot), t). \end{aligned}$$

The second outlet option denotes a terminal Windkessel-style relation. The numerical study uses prescribed  $Q_{\text{in}}(t)$  and  $p_{\text{out},g}(t)$  because they give an unambiguous reduced single-vessel contract.

**Definition 1.34** (Characteristic speeds for the reduced elastic subsystem). Let  $\lambda_{\pm}$  denote the two characteristic speeds of the positive-area elastic 1D subsystem obtained from the homogeneous  $(A, Q)$  balance law. Their formula and assumptions are given in Appendix G.1.

**Assumption 1.35** (Subcritical boundary regime). The baseline boundary treatment is used only in the subcritical regime  $\lambda_- < 0 < \lambda_+$ , where one characteristic enters through the inlet and one characteristic enters through the outlet.

Under this regime, a finite-volume scheme constrains the incoming information at each boundary and leaves the outgoing state determined by the interior solve. This is the reduced-model analogue of declaring enough boundary data for the selected equation class; it is not, by itself, a validation of a particular boundary discretization.

## 1.3 Model Hierarchy and Comparison Boundary

Reduced hemodynamic models form a hierarchy of modeling roles rather than a scalar accuracy ranking. Dimension, wall treatment, rheology, boundary data, output operators, and numerical realization are separate modeling choices. This report selects the 1D area–flow model as the reduced forward map; 0D, 2D, 3D, and multiscale models supply boundary-condition, diagnostic, comparison, and validation vocabulary.

### 1.3.1 0D Outlet and Network Models

A 0D model is a lumped ODE or circuit model for pressures, flows, volumes, and loads. It retains compartment pressures, branch flows, resistances, compliances, and, when the circuit includes inertial effects,

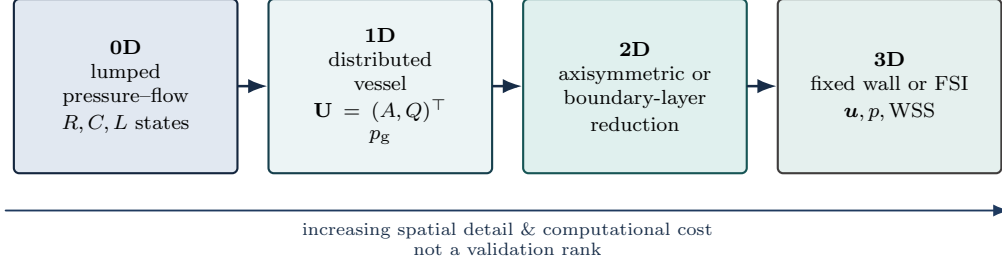


Figure 6: Model hierarchy for reading comparison claims. The horizontal direction is a resolution and computational-cost axis, not a validation ranking. This report selects a 1D reduced forward model; 3D fixed-wall, resolved FSI, clinical, and independent-solver comparisons require separately matched assumptions, inputs, output operators, and discrepancy metrics before they can support evidence claims.

inertances. The model preserves a time-dependent pressure–flow relation for parts of the circulation that are not spatially resolved. Windkessel and RCR models are the canonical terminal examples: they supply an outlet impedance or downstream load for a local 1D or 3D vessel solve [1, 10].

A 0D model closes the circulation seen by the local vessel model; it does not resolve the local stenosis. The spatial coordinate has been integrated out, so the model has no local stenosis geometry, no axial pressure-drop field, no throat acceleration profile, and no recirculation region. It also has no resolved wall-shear stress or wall traction, because it does not carry a lumen surface, a stress tensor on that surface, or a wall-normal output operator.

The 0D tier is therefore useful boundary and network context for this report. It can prescribe an outlet load, organize distal-bed assumptions, or provide a lumped circulation closure. It is not the selected local stenosis-resolution tier and cannot replace the distributed area–flow state used in the numerical study in this report.

### 1.3.2 1D Distributed Area–Flow Models

The selected 1D reduction is defined in Section 1.2.3. There the retained fields  $A(z, t)$ ,  $Q(z, t)$ ,  $\bar{u}(z, t) = Q/A$ , and  $p_g(z, t)$ , the wall/FSI closure catalog, the elastic-wall area–flow balance law, the stenosis reference geometry, the conservative flux/source notation, and the single-vessel boundary data are recorded in Definitions 1.24–1.33 [1, 9]. This subsection uses that machinery only to identify the hierarchy role of the 1D tier.

In the hierarchy, the key point is that the 1D state is distributed but reduced. It retains axial area, flow, mean velocity, and gauge pressure; it does not retain the full three-dimensional velocity field, pressure field, secondary flow, separation, recirculation, or wall traction. Reduced shear quantities therefore inherit the declared velocity-profile, wall-friction, and rheology closures. They are not traction-based WSS unless a separate observation map declares how a reduced output is compared with a resolved wall-stress quantity.

The closure contract remains part of the model definition. A 1D case must declare the momentum-flux/profile

convention, friction law, rheology descriptor  $\mathcal{R}$ , wall descriptor  $\mathcal{W}$ , boundary data, numerical realization, and output operators. Stenosis enters through the reference geometry  $R_0(z)$ ,  $A_0(z)$ , and  $s(z)$ , but resolved throat flow does not appear automatically; variable-radius corrections such as the Canic-style terms are additional closure choices [13]. The current implementation records this axis explicitly through the `canic-extended-1d` and `classical-1d-no-slip` forward-model descriptors, the latter corresponding to the wall no-slip baseline in Definition 1.26.

The 1D model is the selected reduced forward map because it retains distributed pressure–flow structure at low computational cost, while its outputs remain reduced quantities with declared observation maps. In this report it is the selected single-vessel generator for the numerical study, not a clinical-validation claim, an independent-solver parity claim, or a resolved-3D-accuracy claim.

### 1.3.3 2D Intermediate Resolved-Flow Models

A 2D model is treated here as a conceptual intermediate resolved-flow tier, usually posed as an axisymmetric or planar flow problem. It retains a spatially resolved velocity and pressure field on an idealized reduced domain rather than only the section-averaged state  $(A, Q, p_g)$ . Within those idealizations, it can be used to inspect radial velocity structure, throat acceleration, simplified recirculation, and wall-shear trends that a 1D area–flow model cannot resolve.

The same idealization also fixes the boundary of the evidence. Axisymmetric and planar models suppress eccentric plaques, curvature, torsion, branch geometry, non-axisymmetric secondary flow, and fully patient-specific WSS. Their wall outputs depend on the declared stress tensor, wall location, normal, tangent, and output operator, just as in the shear convention of Convention C.4. A 2D result is therefore not interchangeable with matched 3D or resolved-FSI evidence. The broad continuum and dimension-reduction background for this reading is supplied by [1, 2].

The 2D tier is a diagnostic bridge: useful for controlled mechanism checks, but too idealized to serve as clinical or resolved-3D evidence. In this report it can help interpret whether a reduced trend is plausibly tied to throat acceleration or simplified recirculation, but it is not the selected forward generator and does not validate the 1D map by itself.

### 1.3.4 3D Fixed-Wall and Resolved-FSI Models

A fixed-wall 3D hemodynamic model solves for the velocity field  $\mathbf{u}(t, \mathbf{x})$ , pressure field  $p(t, \mathbf{x})$ , and stress-derived outputs on a three-dimensional lumen with fixed or prescribed wall geometry [7]. It can supply resolved velocity, pressure, and wall traction. A WSS output additionally requires the stress tensor, wall normal, wall location, tangent convention, and output operator to be declared [16]. These quantities are

fields on the resolved lumen and describe the vessel wall’s interaction with the fluid domain, not the 1D state variables  $A$ ,  $Q$ , and  $p_g$ .

Resolved FSI changes the wall descriptor. A fixed-wall model belongs to the  $\mathcal{W}_{\text{rigid}}$  or prescribed-wall reading in Definition 1.25; a resolved-FSI model uses  $\mathcal{W}_{\text{resolvedFSI}}$  and adds wall displacement, wall velocity, structural stress, and fluid–structure interface conditions. The elastic 1D wall law  $\mathcal{W}_{\text{elastic1D}}$  is a reduced wall closure, not a structural FSI solve [12].

The 3D/FSI tier can represent eccentricity, curvature, branches, secondary flow, separation, and recirculation more directly than a 1D area–flow model. That role does not make it assumption-free. A valid comparison requires matched geometry, rheology descriptor  $\mathcal{R}$ , wall closure  $\mathcal{W}$ , boundary data, mesh and time resolution, output operators, and discrepancy metrics. A velocity-slab diagnostic, a traction-based WSS comparison, and a pressure-ratio comparison are different observation problems.

The 3D/FSI tier supplies the reference vocabulary for resolved velocity, pressure, traction, and wall motion, but it does not automatically validate a reduced model without matched comparison data. It is not the selected broad parametric generator in this report because the setup and computational burden are high, not because resolved 3D or FSI models are unimportant.

### 1.3.5 Multiscale 3D–1D–0D Coupling

A multiscale model is a coupled forward problem that combines tiers of the hierarchy. A common arrangement resolves a local 3D stenosis region, connects it to a surrounding 1D distributed vessel network, and closes terminal beds with 0D Windkessel or related outlet models. The purpose is to keep local resolved physics where it matters while representing wave propagation and distal impedance without making the entire circulation a 3D domain [11].

The interface laws are part of the model. A 3D–1D interface may impose conservation of flow together with pressure, mean-pressure, normal-traction, or characteristic compatibility. A 1D–0D interface passes terminal flow into an ODE load and returns a pressure or impedance relation to the 1D boundary. Resolved-FSI coupling additionally requires compatible wall kinematics, structural stresses, and interface work. These choices affect stability and interpretation, and they must be recorded with the numerical coupling convention [12].

A multiscale model is not a new fidelity tier; it is a coupled forward problem whose interface laws are part of the model definition. Coupling more components does not automatically make a comparison more correct. The boundary data, interface variables, time coupling, output maps, and discrepancy metrics decide what claim the computation can support. In this report, multiscale coupling provides comparison and boundary-condition vocabulary; it is not the baseline single-vessel solve unless explicitly declared.

A comparison claim requires matched assumptions and declared output operators: the continuum setting, geometry, rheology descriptor  $\mathcal{R}$ , wall/FSI descriptor  $\mathcal{W}$ , boundary data, numerical settings, observation maps, and discrepancy metrics must all be part of the comparison record. This report treats the selected 1D area–flow model as the forward map for the numerical study. Resolved-3D/FSI agreement, clinical calibration, and independent-solver parity are later evidence standards, not assumptions built into the model hierarchy. The pressure–flow motivation is stated after the continuum and model-hierarchy setup so that pressure-drop, pressure-ratio, and shear quantities are introduced as model outputs with declared conventions, not as clinical measurements or validation targets.

## 1.4 Clinical Pressure–Flow Motivation

**Anatomy–function distinction.** Coronary stenosis is the motivating lesion class because a visible narrowing does not automatically imply a flow-limiting obstruction. Clinical assessment therefore distinguishes anatomical stenosis detection from functional pressure–flow assessment [17, p. 4401] [18, Chs. 1–2 and 5] [19, Sec. 1]. Coronary lesion-imaging studies can describe local geometry and lesion length, but those anatomical descriptors do not by themselves define a pressure–flow output [20, Abstract, Methods]. This anatomy–function split motivates reporting pressure drop and reduced pressure ratio under declared observation and reference conventions, rather than treating stenosis severity  $s_{\max}$  alone as the reported reduced output. Section 2 reports velocity diagnostics only; the pressure-drop and pressure-ratio conventions fix reduced-output vocabulary for the model framework. Figure 7 summarizes this motivation as a schematic distinction between visible narrowing and pressure–flow loss.

Clinical fractional flow reserve (FFR) is an invasive pressure-wire index, conventionally interpreted in its measurement setting as distal coronary pressure divided by aortic pressure during maximal hyperemia [18, Ch. 5, Sec. 5.5] [21, Abstract]. FAME lesion-level evidence documented the discordance between angiographic and functional severity and is the clinical source for the familiar  $\text{FFR} \leq 0.80$  decision context [22, Abstract]. Computed tomography-derived FFR (CT-FFR) studies supply noninvasive comparison vocabulary by inferring pressure–flow quantities from coronary computed tomography angiography (CCTA)-derived anatomy and comparing them against invasive FFR or related reference measurements [23, Abstract, Methods] [19, Secs. 1.1–1.2]. Those clinical settings motivate the output vocabulary but are not reproduced by the completed numerical study in this report. The reduced pressure ratio  $\text{PR}_{1D}$  is therefore a convention-governed model output, not a reported FFR, CT-FFR, or pressure-measurement comparison.

For the selected model gauge-pressure field  $p_g$ , define the observed proximal and distal pressure traces through declared scalar observation maps:

$$P_{\text{prox}}(t) := \mathcal{O}_{\text{prox}}[p_g(\cdot, t)], \quad P_{\text{dist}}(t) := \mathcal{O}_{\text{dist}}[p_g(\cdot, t)].$$

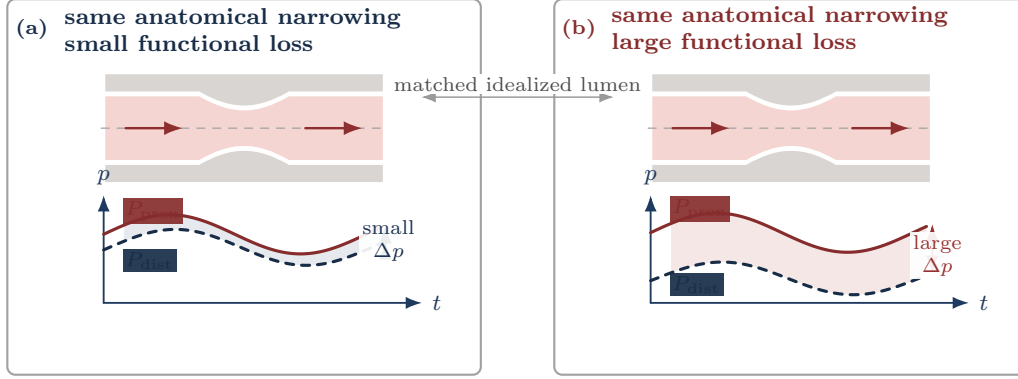


Figure 7: Pressure-flow motivation for reduced pressure outputs. The same anatomical narrowing can correspond to either a small functional pressure loss in panel (a) or a larger loss in panel (b). The reduced-output target is therefore the declared pressure-loss signature, not stenosis severity alone.

The pressure-drop trace is invariant under common additive pressure shifts:

$$\Delta p(t) := P_{\text{prox}}(t) - P_{\text{dist}}(t).$$

Unlike  $\Delta p(t)$ , a pressure ratio depends on the pressure reference used before forming the numerator and denominator. A reduced pressure-ratio output must therefore declare its proximal and distal observation maps, pressure reference, averaging window, and denominator admissibility. Convention C.3 records those requirements and the trace-level definition of  $\text{PR}_{1D}(\pi_{\text{PR}})$ . Its high-flow averaging window is a recorded output window, not a clinical hyperemia model unless an external measurement comparison is separately specified. Figure 8 shows the corresponding axial-tap shorthand for an idealized 1D stenosis.

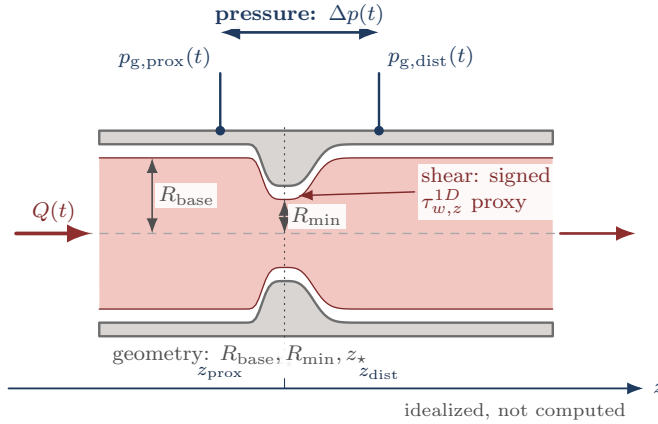


Figure 8: Schematic tap and output convention for an idealized stenosis, not drawn from a computed case. The blue pressure taps define  $\Delta p(t)$ , the gray geometry landmarks locate the stenosis region, and the red/orange cue marks the reduced shear-proxy convention. Convention C.3 supplies the pressure-ratio observation maps, averaging window, pressure reference, and admissibility rule for  $\text{PR}_{1D}(\pi_{\text{PR}})$ .

**Shear diagnostics.** Pressure drops and pressure ratios are lesion-scale pressure-output conventions. A resolved wall-shear-stress output belongs to a resolved stress state and must declare the stress tensor, wall normal, wall location, output operator, and signed tangent direction when a signed component is reported [16, Abstract, Sec. 2, pp. 8–10]. Reduced shear proxies are model-tier diagnostics rather than clinical anatomy–function outputs; Convention C.4 records the declaration requirements for comparisons with traction-based wall shear stress.

## 2 Preliminary Resolved-Velocity Diagnostic at $T = 1$

This section reports a numerical comparison between the stenosis-aware 1D area-flow model and the available resolved 3D velocity data. The comparison is an output-operator check: it is not clinical pressure evidence, nor is it an exact cross-section quadrature of the 3D tetrahedral solution. The completed diagnostic averages node-centered axial velocity over thin axial slabs and compares those values with the interpolated 1D mean velocity  $Q/a$ , where  $a = R^2$  is the solver coordinate. Radial profiles use the same slab nodes binned by  $\sqrt{x^2 + y^2}/R_0(z)$  and compare them with the 1D closure profile. The tables and figures in this section are baseline Newtonian diagnostics; non-Newtonian rheology descriptors require separately generated comparison datasets.

**Section 2 notation warning.** In this section only, the stored variable named **A** is the solver coordinate  $a = R^2$ , not physical cross-sectional area. The physical area is  $A_{\text{phys}} = \pi a$ , and the reported mean velocity is  $Q/a$ , equivalently  $Q_{\text{phys}}/A_{\text{phys}}$  under the declared  $\pi$ -scaling.

All numbers below come from the comparison artifact `simulations/output/3d_comparison/full_t1_native_nx400/`, interpreted under Convention G.1. The regeneration command, source-path convention, and file hashes are listed in Appendix H. The comparison uses baseline parameters with final time  $T = 1.0$  s and the geometry-rest initial condition, with  $N = 400$  finite-volume cells on  $L = 6$  cm ( $\Delta z = 0.015$  cm), the native SSPRK3 time integrator, MUSCL finite volume with the minmod limiter, timestep cap  $10^{-5}$  s, and CFL cap 0.45. The initial state is geometry-rest,  $a = R_0^2$  and  $Q = 0$ . The inlet boundary uses the parabolic-profile mean velocity  $\bar{u}_{\text{in}} = 0.5(45) = 22.5$  cm/s and imposes  $Q_{\text{in}} = R_0(0)^2 \bar{u}_{\text{in}}$ ; the outlet fixes  $a_{\text{out}} = R_0(L)^2$  and computes the ghost flow from the outgoing Riemann invariant. The two 3D source identifiers are the default upstream XDMF paths `simulations/data/3d/canic_case3/77/velocity.xdmf` and `simulations/data/3d/canic_case3/60/velocity.xdmf`, with severities 23% and 40%, target time 1.0 s, and tolerance  $10^{-3}$  s. The matched XDMF time for both included cases is 0.9994999999999453 s. Section means use 200 equally spaced axial targets and slab half-width  $\max(\Delta z_{\text{sec}}/2, 0.015) = 0.0150753769$  cm; radial profiles use the declared slices  $z = 1.951, 2.451, 2.951$  cm and 20 radial bins in  $\sqrt{x^2 + y^2}/R_0(z)$ . The raw XDMF/HDF5 inputs are not archived in the report package; the archived evidence available to the PDF consists of the copied static plot data in `figures/static/static/data/stenosis-comparison/` and the provenance hashes in Appendix H.

Table 1: Availability and run-diagnostic status for the  $T = 1$  comparison artifact. The controls are known from the declared setup; per-step diagnostics are not persisted in the available CSV/SVG outputs.

| Case | Severity | $\Delta t_{\text{max}}$ (s) | CFL cap | 3D time (s)        | Missing per-step diagnostics                                             |
|------|----------|-----------------------------|---------|--------------------|--------------------------------------------------------------------------|
| 77   | 23%      | $10^{-5}$                   | 0.45    | 0.9994999999999453 | steps, realized max CFL, min $a$ , residual summary, positivity failures |
| 60   | 40%      | $10^{-5}$                   | 0.45    | 0.9994999999999453 | steps, realized max CFL, min $a$ , residual summary, positivity failures |

In the radius-squared solver convention, the stored variable **A** is the coordinate  $a = R^2$ , not the physical area  $A_{\text{phys}} = \pi a$ . The flow variable is therefore the corresponding  $\pi$ -scaled flow:  $Q_{\text{phys}} = \pi Q$ . All comparison velocities in this section use the field `velocity(result) =  $Q/a$` , which equals  $Q_{\text{phys}}/A_{\text{phys}}$  under this scaling. The plots and tables should not be read as using the stored  $Q$  divided by  $A_{\text{phys}}$ .

The Section 2 diagnostic uses the Canic extended radius-squared finite-volume realization. The corresponding forward-model descriptor is `canic-extended-1d`. It uses  $\mathcal{W}_{\text{elastic1D}}$ , the elastic pressure–area wall law in Definition 1.29, `newtonian` rheology ( $\nu = 0.04 \text{ cm}^2/\text{s}$ ), and the parabolic velocity profile  $\mathcal{P} = \text{parabolic}$ , so  $\alpha_{\mathcal{P}} = 4/3$  and  $g_{\mathcal{P}} = 4$ . The Canic variable-radius corrections are included: the flux uses  $\alpha_{\mathcal{P}} + \alpha_c(R'_0)$ , and the source includes the  $p_2$ ,  $R'_0$ ,  $R''_0$ , and  $\alpha'_c$  terms described in Appendix G.

The two included upstream states are case 77, treated as a 23% stenosis, and case 60, treated as a 40% stenosis. Both XDMF files report  $t = 0.999499999999453$ , within  $5.0 \times 10^{-4}$  of  $T = 1$ . Upstream case 50 was not used because its XDMF time is  $t = 1.4994999999998904$ , outside the  $10^{-3}$  tolerance for the  $T = 1$  comparison.

Table 2: Section-mean and radial-profile discrepancy summary for the  $T = 1$  resolved-node comparison. Velocity errors are in cm/s.

| Case | Severity | Sections | Min nodes | Mean $ e_s $ | Max $ e_s $ | Mean rel. | Max rel. | Mean $ e_r $ | Max $ e_r $ |
|------|----------|----------|-----------|--------------|-------------|-----------|----------|--------------|-------------|
| 77   | 23%      | 200      | 64        | 7.471        | 26.26       | 0.4534    | 1.622    | 10.03        | 23.01       |
| 60   | 40%      | 200      | 43        | 9.440        | 47.48       | 0.5141    | 2.458    | 15.35        | 41.72       |

Figure 9 shows the section-mean comparison. The 1D model captures the smooth upstream and downstream trend but overpredicts the highest-velocity region near the stenosis, especially for the 40% case. The largest section errors occur for case 60 around  $z = 2.4\text{--}2.8 \text{ cm}$ , where the 1D mean velocity is between 58 and 67 cm/s while the node-slab 3D mean is between 19 and 27 cm/s. Because the largest relative errors exceed unity near the stenosis, this comparison does not support an accuracy claim for the 1D model in the throat region. It is still useful as a velocity-localization diagnostic: the mismatch concentrates where the reduced velocity closure, idealized 1D boundary state, and node-slab output operator are least matched to the resolved 3D field.

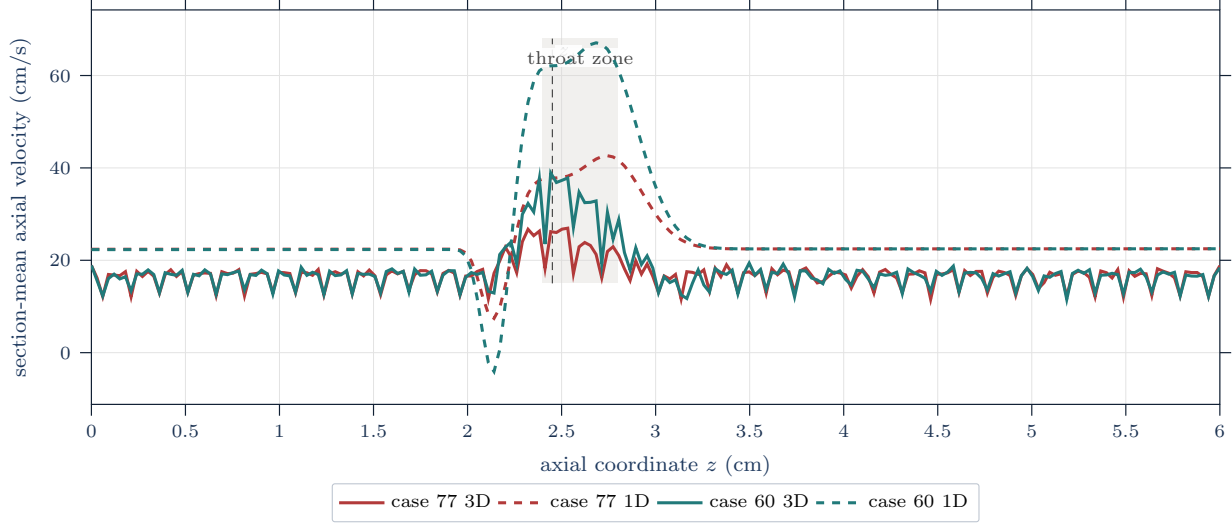


Figure 9: Section-mean axial velocity comparison at  $T = 1$ . The shaded band marks the throat-centered stenosis region near  $z_*$ ; solid curves are resolved 3D node-slab means, and dashed curves are interpolated 1D  $Q/a$ , equivalently  $Q_{\text{phys}}/A_{\text{phys}}$  under the declared  $\pi$ -scaling. The mismatch localizes near the stenosis and is larger for the 40% case.

Table 3: Five largest section-mean absolute errors across the two included  $T = 1$  cases. Velocities and errors are in cm/s.

| Rank | Case | $z$ (cm) | $u_{1D}$ | $u_{3D}$ | $ e $ | Rel.  | Nodes |
|------|------|----------|----------|----------|-------|-------|-------|
| 1    | 60   | 2.714    | 66.79    | 19.31    | 47.48 | 2.458 | 72    |
| 2    | 60   | 2.774    | 63.74    | 24.57    | 39.17 | 1.594 | 60    |
| 3    | 60   | 2.412    | 61.90    | 23.51    | 38.39 | 1.633 | 67    |
| 4    | 60   | 2.563    | 63.71    | 27.15    | 36.56 | 1.347 | 72    |
| 5    | 60   | 2.834    | 57.59    | 21.68    | 35.92 | 1.657 | 82    |

The radial-profile diagnostics in Figure 10 show the same pattern at the profile level. For both cases, the throat slice  $z = 2.451$  cm has fewer populated radial bins because fewer 3D nodes lie in the narrowest cross-section slab. The largest radial-profile discrepancy is downstream of the throat at  $z = 2.951$  cm, where case 60 reaches a maximum per-bin absolute error of 41.72 cm/s. The dashed 1D curves use the declared velocity-profile closure evaluated from the section mean  $\bar{u} = Q/a$ . For the power-family diagnostic,

$$u_{\mathcal{P}}(r) = \frac{\gamma + 2}{\gamma} \bar{u} \left( 1 - \left( \frac{r}{R} \right)^\gamma \right), \quad \alpha_{\mathcal{P}} = \frac{\gamma + 2}{\gamma + 1}.$$

An  $\alpha = 1.1$  power-profile diagnostic corresponds to the  $\gamma = 9$  member of this family; the parabolic profile is  $\gamma = 2$  and  $\alpha_{\mathcal{P}} = 4/3$ . Flat-profile diagnostics use  $u_{\mathcal{P}}(r) = \bar{u}$  with  $\alpha_{\mathcal{P}} = 1$ .

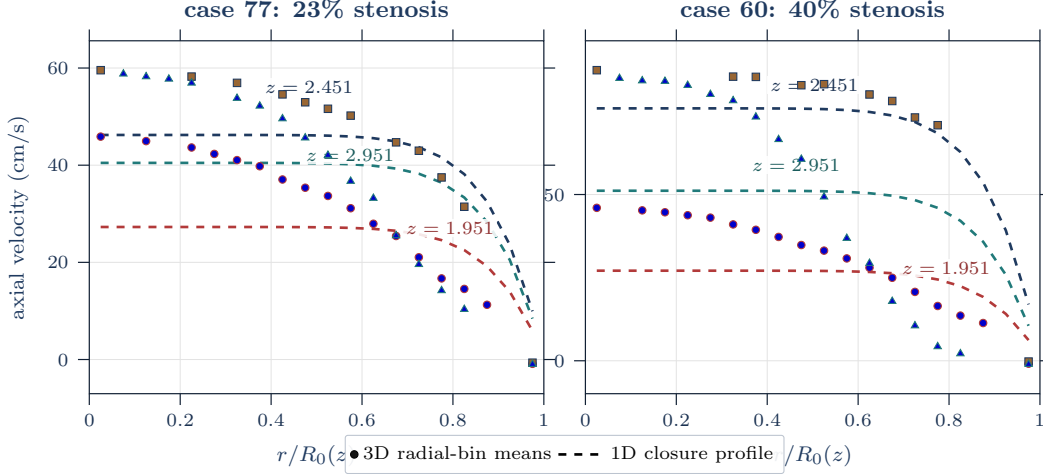


Figure 10: Radial velocity profile comparison at the declared throat-centered slices. Markers are resolved 3D radial-bin means; dashed curves are the 1D closure profile reconstructed from  $Q/a$ . Colored in-panel labels identify the axial stations, making the downstream case-60 discrepancy visible without repeating a separate legend in each panel.

Table 4: Radial-profile discrepancy by case and slice. Errors are in cm/s.

| Case | $z$ (cm) | Populated bins | Mean $ e_r $ | Max $ e_r $ |
|------|----------|----------------|--------------|-------------|
| 77   | 1.951    | 17             | 9.404        | 18.60       |
| 77   | 2.451    | 12             | 6.949        | 13.33       |
| 77   | 2.951    | 16             | 13.01        | 23.01       |
| 60   | 1.951    | 18             | 10.04        | 18.90       |
| 60   | 2.451    | 10             | 7.562        | 17.17       |
| 60   | 2.951    | 17             | 25.55        | 41.72       |

These discrepancies should be read in light of the comparison boundary in Section 1.3. The 1D solver is compared to a resolved 3D velocity field through node-slab output operators. The result locates where the reduced velocity closure departs from the resolved state, but it does not attribute that departure uniquely to the 1D closure, boundary data, 3D post-processing operator, or formulation differences. In summary, the  $T = 1$  comparison is a declared velocity diagnostic whose largest deviations are localized near and downstream of the stenosis throat, especially for the 40% case. It should not be converted into a pressure, clinical, or resolved-3D validation claim. The next defensible study step is therefore a matched comparison dataset that restores the raw 3D inputs, archives the source hashes or upstream release identifiers, and reruns the same output operators while varying only one declared closure or boundary choice at a time.

## 2.1 Package Benchmark Suite

The report package now includes a reproducible package-benchmark pipeline for the Julia solver package and Python CLI. The suite is an internal evidence record for self-convergence, backend agreement, descriptor smoke/health, runtime comparison, and resolved-velocity output-operator diagnostics within the emitted

CSVs. It does not upgrade those checks into clinical validation, pressure or FFR accuracy, full transient FEM validation, or Julia–Python scientific equivalence beyond the metrics actually compared.

```
./scripts/julia-release simulations/run_package_benchmark.jl \
  --profile smoke \
  --output-dir simulations/output/package_benchmark/<run_id> \
  --overwrite \
  --include-python \
  --publish-report-assets

pipenv run python scripts/render_package_benchmark_figures.py \
  --benchmark-dir simulations/output/package_benchmark/<run_id>
```

The smoke profile is a deterministic wiring check. The overnight profile expands the same schemas to the descriptor-health, refinement, native/SciML parity, stationary-Stokes projection, rheology/profile, OpenBF-style boundary, resolved-velocity, and Python CPU/Torch-MPS comparison stages. Optional SciPy and resolved-3D inputs are treated as availability boundaries: absent inputs produce structured skipped rows rather than manuscript claims.

Table 5: Package benchmark stage summary.

| Stage            | Rows | OK  | Skipped/error |
|------------------|------|-----|---------------|
| case results     | 18   | 18  | 0             |
| refinement       | 128  | 128 | 0             |
| backend parity   | 18   | 18  | 0             |
| stokes ic        | 12   | 12  | 0             |
| rheology profile | 60   | 60  | 0             |
| boundary openbf  | 3    | 3   | 0             |
| resolved3d       | 4    | 4   | 0             |
| python mps       | 9    | 9   | 0             |

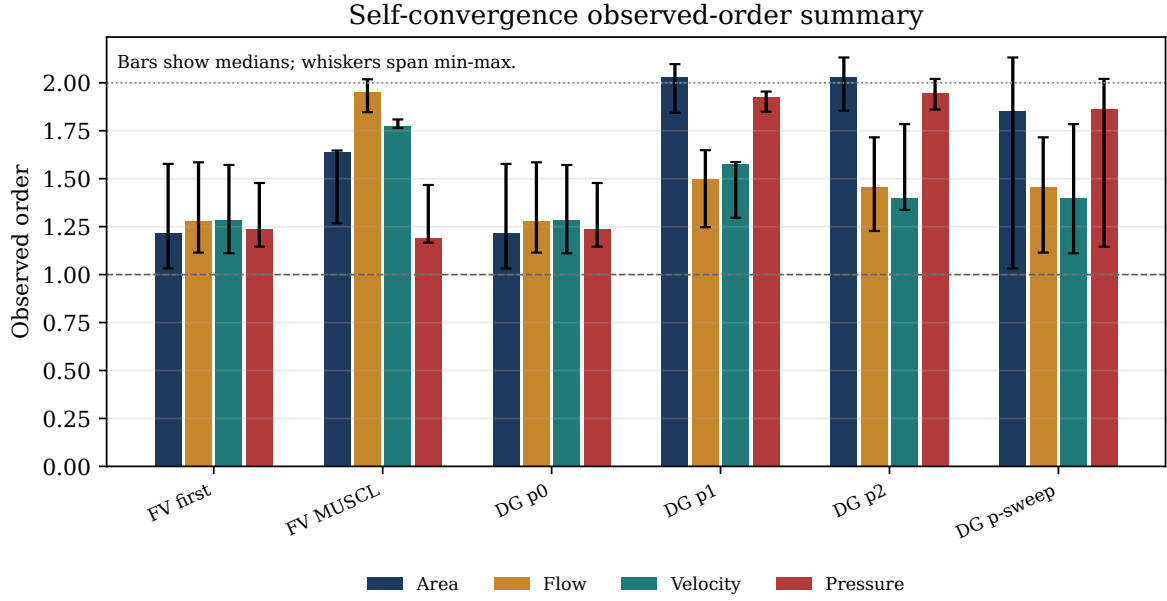


Figure 11: Self-convergence observed-order summary emitted by the package benchmark renderer. Bars report median observed order by method and metric; whiskers show the observed min-max range across the benchmarked refinements. This is an internal convergence diagnostic, not external validation evidence.

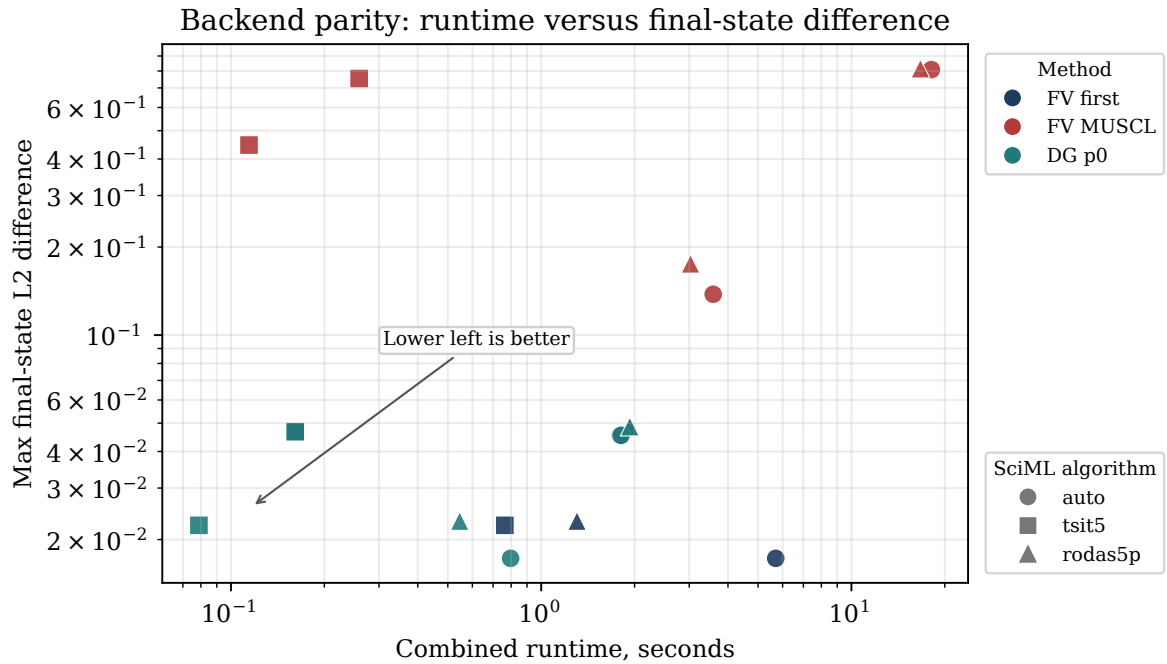


Figure 12: Native/SciML backend agreement versus runtime for benchmarked compatible methods. Color identifies the method family, marker shape identifies the SciML algorithm, and lower-left points are both faster and closer to the native final state under the plotted aggregate difference.

### Rheology/profile sensitivity by stenosis severity

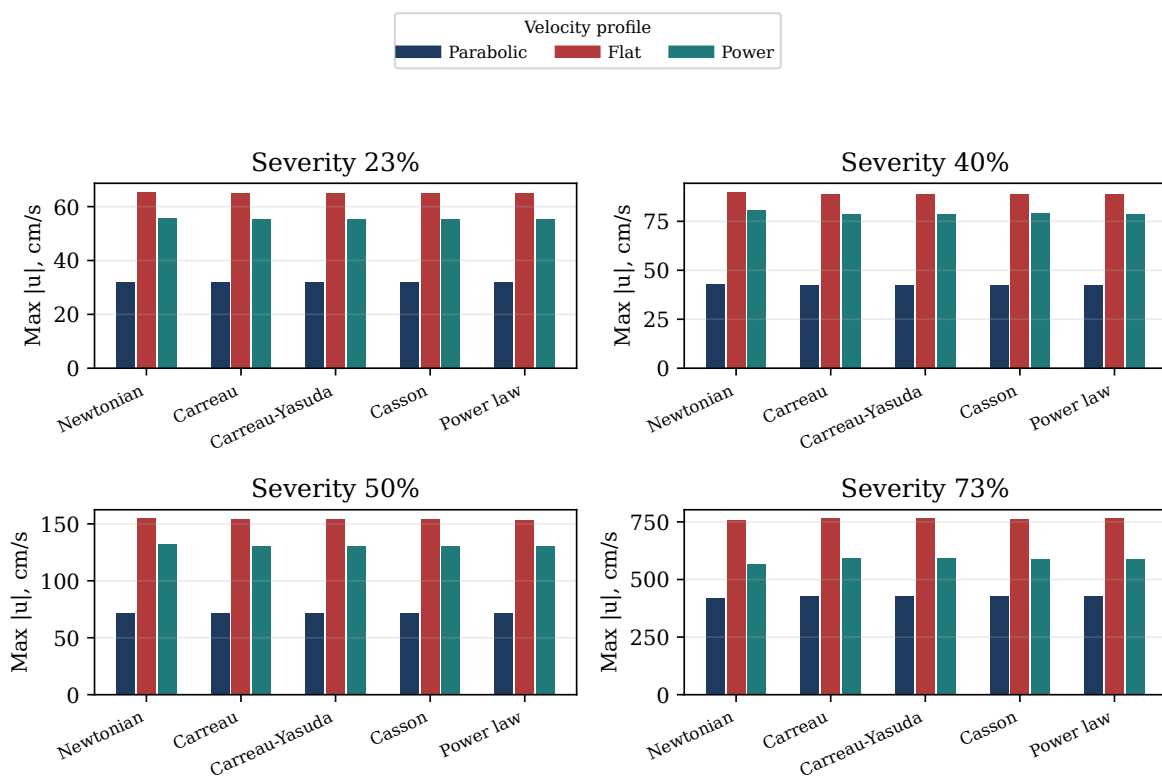


Figure 13: Rheology/profile sensitivity summary for declared descriptor combinations. Facets separate stenosis severity; grouped bars separate the rheology and velocity-profile descriptors. The diagnostic shows how the maximum speed responds to descriptor choices within the emitted benchmark records.

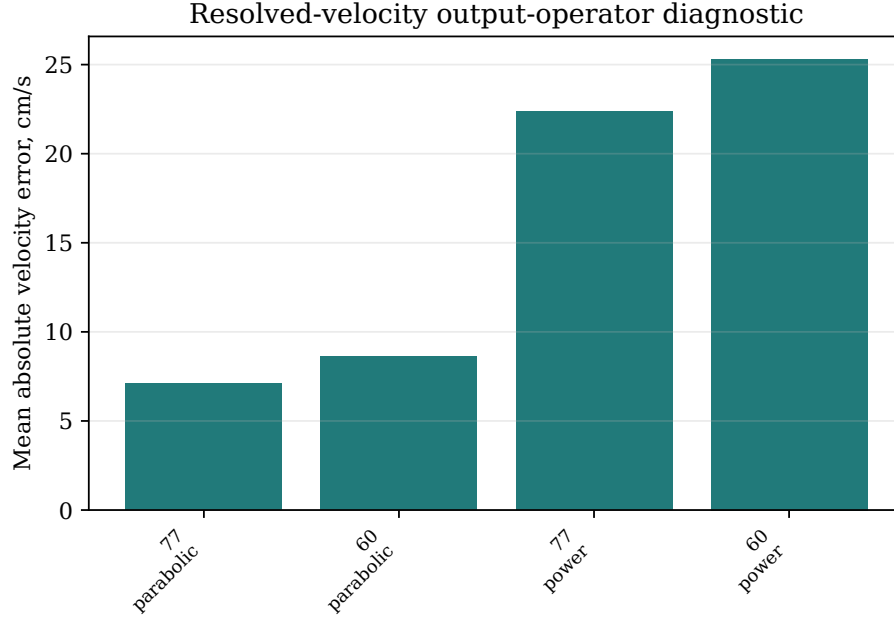


Figure 14: Resolved-velocity output-operator diagnostic summary for the available local cases. The package-benchmark CSVs contain four OK resolved-velocity rows across the parabolic and power-profile closures; the panel remains an output-operator diagnostic rather than a resolved-3D validation claim.

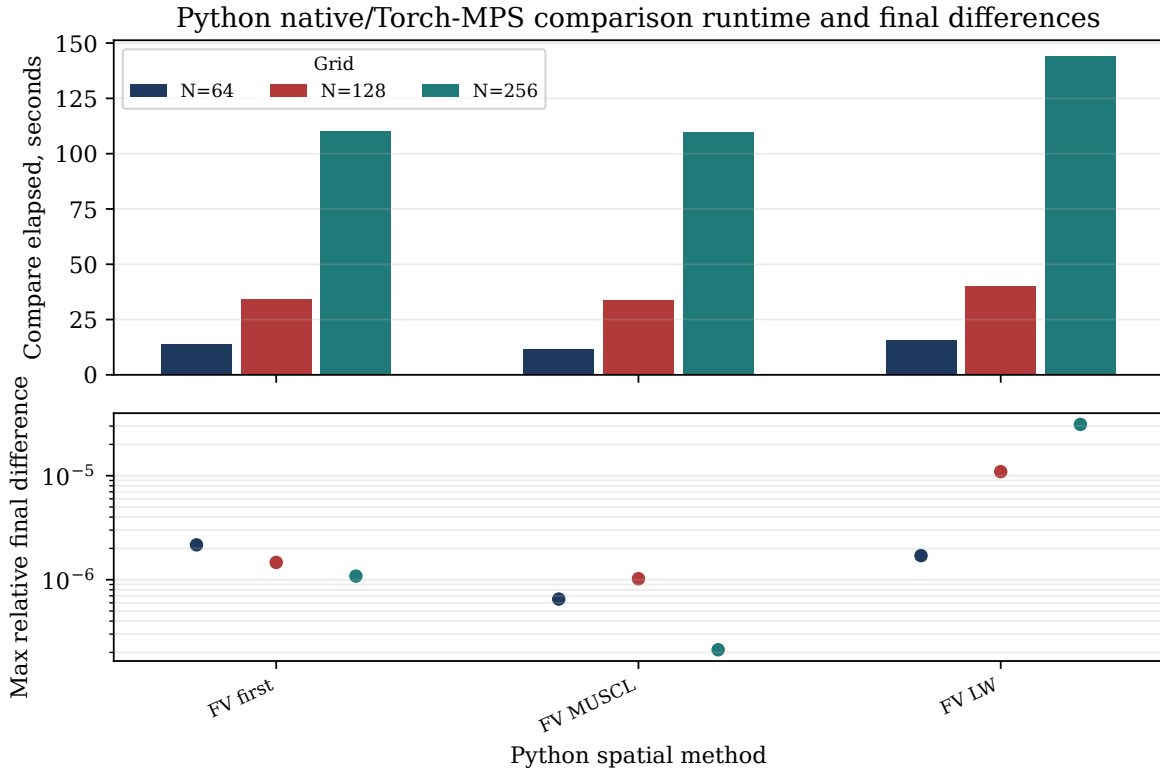


Figure 15: Python native CPU versus Torch-MPS comparison for the Python CLI surface. The top panel reports elapsed time by method and grid size; the lower panel reports the maximum relative final-state difference across the emitted area and flow summaries.

### 3 Conclusions and Limitations

This report established a mathematical vocabulary for idealized stenotic blood flow and used it to state bounded numerical diagnostics. The continuum portion connected the flow map, material derivative, transport theorem, balance laws, stress closure, Navier–Stokes equations, and one-dimensional area–flow reduction. The model-hierarchy discussion then separated reduced pressure ratios, reduced shear proxies, velocity diagnostics, and implementation benchmarks from clinical measurements or resolved three-dimensional wall quantities.

The numerical comparison demonstrated that the selected one-dimensional solver can be placed in a declared diagnostic relationship with available resolved 3D velocity data through section-mean and radial-profile output operators. For the two included idealized cases at  $T = 1$ , the 1D solution gives broadly similar upstream and downstream velocity trends but overpredicts the near-throat velocity, especially for the 40% case. The largest errors are therefore not a minor plotting discrepancy; they occur in the region where the reduced velocity closure, boundary realization, and node-slab 3D post-processing operator are least interchangeable.

The package benchmark suite records descriptor health, refinement, native/SciML agreement, rheology and velocity-profile sensitivity, OpenBF-style boundary handling, resolved-velocity checks, and Python CPU/MPS comparisons for the emitted CSV records. It is an internal reproducibility and implementation diagnostic suite; it is not clinical validation, full transient FEM validation, or proof of Julia–Python scientific equivalence beyond the reported metrics.

The numerical record does not establish 1D accuracy against resolved 3D flow, does not supply clinical pressure evidence, and does not demonstrate pressure-drop or pressure-ratio accuracy. The resolved-velocity comparison is a preliminary diagnostic whose raw XDMF/HDF5 inputs are not archived in the report package. The pressure-ratio and shear-proxy conventions are included to fix the output vocabulary for later reduced-order studies, not as completed numerical evidence in this report.

A stronger follow-up comparison would restore or archive the raw 3D inputs, archive source hashes or release identifiers, preserve per-run diagnostics such as time-step counts, CFL extrema, positivity checks, and residual summaries, and then vary one declared closure or boundary choice at a time. A later pressure-focused study would also need declared pressure-drop and pressure-ratio outputs, plus an external comparison record if the clinical motivation is to be evaluated rather than only framed.

# A Acronyms and Abbreviations

## General abbreviations.

|      |                                     |      |                         |
|------|-------------------------------------|------|-------------------------|
| a.e. | almost everywhere                   | bpm  | beats per minute        |
| e.g. | <i>exempli gratia</i> (for example) | i.e. | <i>id est</i> (that is) |

## Clinical, modeling, and numerical acronyms.

|        |                                                     |     |                               |
|--------|-----------------------------------------------------|-----|-------------------------------|
| CAS    | coronary artery stenosis                            | FSI | fluid–structure interaction   |
| CCTA   | coronary computed tomography angiography            | RBC | red blood cell                |
| CT-FFR | computed tomography-derived fractional flow reserve | FFR | fractional flow reserve       |
| IVUS   | intravascular ultrasound                            | WSS | wall shear stress             |
| OCT    | optical coherence tomography                        | CFD | computational fluid dynamics  |
| ODE    | ordinary differential equation                      | PDE | partial differential equation |
| IC     | initial condition                                   | BC  | boundary condition            |
| FDM    | finite difference method                            | FEM | finite element method         |
| FVM    | finite volume method                                | ROM | reduced-order model           |
| 0D     | zero-dimensional                                    | 1D  | one-dimensional               |
| 2D     | two-dimensional                                     | 3D  | three-dimensional             |

## B Mathematical Notation

**Notation B.1** (Report mathematical notation). This appendix collects the mathematical notation used throughout this report.

| Symbol                                  | Meaning                                                                                                                          |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| $:=$                                    | defines                                                                                                                          |
| $\equiv$                                | notational equivalence / identified with                                                                                         |
| $\mathbb{R}$                            | real numbers                                                                                                                     |
| $\mathbb{R}^+$                          | strictly positive real numbers                                                                                                   |
| $\mathbb{R}^-$                          | strictly negative real numbers                                                                                                   |
| $\mathbb{R}^n$                          | n-dimensional real vector space                                                                                                  |
| $\mathbb{N}$                            | natural numbers                                                                                                                  |
| $\mathbb{N}_0$                          | nonnegative integers $\{0, 1, 2, \dots\}$                                                                                        |
| $\{\mathbf{v}_1, \dots, \mathbf{v}_n\}$ | general basis of $\mathbb{R}^n$                                                                                                  |
| $\{\mathbf{e}_1, \dots, \mathbf{e}_n\}$ | standard basis of $\mathbb{R}^n$                                                                                                 |
| $[n]$                                   | index set $\{1, 2, \dots, n\} \subset \mathbb{N}$ for $n \in \mathbb{N}$                                                         |
| $I_T$                                   | open time interval $(0, T_{\text{final}})$ for transient interior-time arguments                                                 |
| $\bar{I}_T$                             | closed time interval $[0, T_{\text{final}}]$ for initial-time data and flow maps                                                 |
| $K$                                     | compact space-time rectangle, such as $[0, \ell] \times [0, T_{\text{final}}]$ , used for output-field norms when locally stated |
| $\Omega \subset \mathbb{R}^n$           | bounded domain                                                                                                                   |
| $\bar{\Omega}$                          | the closure of $\Omega$                                                                                                          |
| $\partial\Omega$                        | the boundary of $\Omega$                                                                                                         |
| $\Omega_B(t)$                           | spatial blood domain at time $t$                                                                                                 |
| $\mathcal{Q}_T$                         | spatial-temporal domain $\{(t, \mathbf{x}) : t \in I_T, \mathbf{x} \in \Omega_B(t)\}$                                            |
| $C^k(\Omega)$                           | functions with continuous classical derivatives through order $k$ in $\Omega$                                                    |
| $C^k(\bar{\Omega})$                     | functions whose derivatives through order $k$ extend continuously to $\bar{\Omega}$                                              |
| $C_c^k(\Omega)$                         | $k$ times continuously differentiable functions with compact support in $\Omega$                                                 |
| $C_c^\infty(\Omega)$                    | smooth functions with compact support in $\Omega$                                                                                |

| Symbol                                                                                                | Meaning                                                                                                     |
|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| $C(K)$                                                                                                | continuous functions on a stated compact set $K$                                                            |
| $L^p(\Omega)$                                                                                         | Lebesgue space of $p$ -integrable functions modulo equality a.e.                                            |
| $d\mathbf{x}$                                                                                         | Lebesgue volume element on $\mathbb{R}^n$                                                                   |
| $dS_{\mathbf{x}}$                                                                                     | surface measure element on $\partial\Omega \subset \mathbb{R}^n$                                            |
| $dV$                                                                                                  | 3D volume element on domain $\Omega \subset \mathbb{R}^3$                                                   |
| $dS$                                                                                                  | 3D surface element on boundary $\partial\Omega \subset \mathbb{R}^3$                                        |
| $\nabla$                                                                                              | gradient operator                                                                                           |
| $\partial_{x_i}\phi$                                                                                  | partial derivative of $\phi$ with respect to coordinate $x_i$                                               |
| $\partial_t\phi, \partial_z f, \partial_{Ap}$                                                         | compact partial derivatives with respect to named coordinates $t, z$ , and $A$                              |
| $\partial_r u, \partial_\theta u$                                                                     | compact partial derivatives in cylindrical coordinates                                                      |
| $\Delta\phi = \nabla \cdot \nabla\phi$                                                                | Laplacian of scalar field $\phi$                                                                            |
| $\text{div}$                                                                                          | divergence of a vector field                                                                                |
| $\mathbf{div}$                                                                                        | row-wise divergence of a tensor field                                                                       |
| $\mathbf{v}_i$                                                                                        | $i$ -th component of vector $\mathbf{v}$                                                                    |
| $\mathbf{S} : \mathbf{T}$                                                                             | Frobenius contraction $\sum_{i,j} S_{ij} T_{ij}$ for second-order tensors                                   |
| $\langle \cdot, \cdot \rangle_X$                                                                      | inner product on vector space $X$                                                                           |
| $\langle \mathbf{u}, \mathbf{v} \rangle \equiv \langle \mathbf{u}, \mathbf{v} \rangle_{\mathbb{R}^n}$ | inner product of vectors $\mathbf{u}, \mathbf{v} \in \mathbb{R}^n$                                          |
| $\partial_{\hat{\mathbf{n}}}\phi$                                                                     | normal derivative $\langle \nabla\phi, \hat{\mathbf{n}} \rangle$ of scalar field $\phi$ on $\partial\Omega$ |
| $\ \cdot\ _X$                                                                                         | norm on a specified normed space $X$ ; bare $\ \cdot\ $ is local shorthand                                  |
| $\ \cdot\ _F$                                                                                         | Frobenius norm of a matrix or second-order tensor                                                           |

## C Domain Specific Notation

**Definition C.1** (SI unit convention). Unless otherwise stated, physical units are SI: length in meters, time in seconds, density in  $\text{kg}/\text{m}^3$ , pressure in Pa, dynamic viscosity in  $\text{Pa} \cdot \text{s}$ , and kinematic viscosity in  $\text{m}^2/\text{s}$ .

**Convention C.2** (Centimeter-second numerical-record convention). The SI convention above governs continuum notation and unqualified analytical parameters. The Julia solver outputs and the Section 2 tables instead use the centimeter-gram-second convention of the numerical realization: lengths are in cm, time in s, density in  $\text{g}/\text{cm}^3$ , velocity in  $\text{cm}/\text{s}$ , pressure and stress in  $\text{dyn}/\text{cm}^2$ , dynamic viscosity in  $\text{g}/(\text{cm} \cdot \text{s}) = \text{dyn} \cdot \text{s}/\text{cm}^2$ , and kinematic viscosity in  $\text{cm}^2/\text{s}$ . Thus the default solver geometry parameters  $L$ ,  $R_{\max}$ ,  $z_a$ ,  $z_s$ ,  $\sigma_a$ , and  $\kappa$  are centimeter quantities, while the stenosis localization  $\lambda$  in  $\exp(-\lambda g^4)$  has units  $\text{cm}^{-4}$ . The radius-squared solver state coordinate  $a = R^2$  has units  $\text{cm}^2$ ; when a physical circular area is meant it is  $A_{\text{phys}} = \pi a$ , also reported in square centimeters.

Output fields carry their display units in their names. In particular, `z_cm` and `RO_cm` are geometry fields, `A_cm2` is the area-coordinate field in  $\text{cm}^2$ , and `Q_cm3_s` is the flow-coordinate field paired with  $a$  in nominal  $\text{cm}^3/\text{s}$ . For the radius-squared solver convention, the corresponding physical circular-area flow is  $Q_{\text{phys}} = \pi Q$ , while `uavg_cm_s` denotes  $Q/a = Q_{\text{phys}}/A_{\text{phys}}$ . The Section 2 velocity/error columns are in  $\text{cm}/\text{s}$ , `pressure_dyn_cm2` and initial-condition pressure-drop fields are in  $\text{dyn}/\text{cm}^2$ , and `nu_eff_cm2_s` is in  $\text{cm}^2/\text{s}$ . A pressure supplied through a Pa-valued command-line option is converted before storage using  $1 \text{ Pa} = 10 \text{ dyn}/\text{cm}^2$ . Any numerical-output value used in an SI formula must first be converted; for example  $1 \text{ cm} = 10^{-2} \text{ m}$ ,  $1 \text{ cm}^2/\text{s} = 10^{-4} \text{ m}^2/\text{s}$ ,  $1 \text{ g}/(\text{cm} \cdot \text{s}) = 10^{-1} \text{ Pa} \cdot \text{s}$ , and  $1 \text{ dyn}/\text{cm}^2 = 10^{-1} \text{ Pa}$ .

**Convention C.3** (Pressure-output convention). Pressure-drop and pressure-ratio quantities are reduced output vocabulary. A pressure-drop trace requires proximal and distal scalar pressure observations, and a pressure-ratio output is reported only with a ratio-output specification that declares proximal and distal scalar pressure observations, a time-averaging window, a pressure reference, and the denominator admissibility condition below. The general ratio-output specification is

$$\pi_{\text{PR}} := (\mathcal{O}_{\text{prox}}, \mathcal{O}_{\text{dist}}, \mathcal{T}_{\text{HF}}, p_{\text{ref}}).$$

Here  $\mathcal{O}_{\text{prox}}$  and  $\mathcal{O}_{\text{dist}}$  are the declared scalar observation maps applied to the gauge-pressure field  $p_g$ , and  $p_{\text{ref}}$  is the fixed scalar pressure reference added to observed gauge-pressure traces before forming the ratio. In the 1D axial-tap or cross-sectional pressure-average specialization, this report may use the shorthand

$$\pi_{\text{PR}} = (z_{\text{prox}}, z_{\text{dist}}, \mathcal{T}_{\text{HF}}, p_{\text{ref}}),$$

with the pressure observation maps understood from the declared tap or cross-sectional averaging convention.

Given a model gauge-pressure field, the observed pressure traces are

$$P_{\text{prox}}(t) := \mathcal{O}_{\text{prox}}[p_g(\cdot, t)], \quad P_{\text{dist}}(t) := \mathcal{O}_{\text{dist}}[p_g(\cdot, t)].$$

The corresponding pressure-drop trace is

$$\Delta p(t) := P_{\text{prox}}(t) - P_{\text{dist}}(t).$$

A pressure ratio is not invariant under common additive pressure shifts. The reference-consistent ratio traces are therefore defined after observation:

$$P_{\text{prox}}^{\text{ratio}}(t) := p_{\text{ref}} + P_{\text{prox}}(t), \quad P_{\text{dist}}^{\text{ratio}}(t) := p_{\text{ref}} + P_{\text{dist}}(t).$$

This trace-level convention does not require the observation maps to preserve constant shifts. The subscript HF labels a declared high-flow averaging window in the study record; it is not a clinical hyperemia model unless an external measurement comparison is separately specified [18, Ch. 5, Sec. 5.5, pp. 72–73] [21, p. 1703]. The ratio-output specification is admissible for a computed pressure trace when  $\mathcal{T}_{\text{HF}} \subset I_T$  is Lebesgue-measurable with  $0 < |\mathcal{T}_{\text{HF}}| < \infty$ , the proximal and distal ratio-pressure traces are integrable on that window, and

$$\langle P_{\text{prox}}^{\text{ratio}}(t) \rangle_{\mathcal{T}_{\text{HF}}} \neq 0.$$

For an admissible  $\pi_{\text{PR}}$ , the corresponding reduced pressure-ratio output is

$$\text{PR}_{1D}(\pi_{\text{PR}}) := \frac{\langle P_{\text{dist}}^{\text{ratio}}(t) \rangle_{\mathcal{T}_{\text{HF}}}}{\langle P_{\text{prox}}^{\text{ratio}}(t) \rangle_{\mathcal{T}_{\text{HF}}}}.$$

For an integrable scalar trace,

$$\langle f \rangle_{\mathcal{T}_{\text{HF}}} := \frac{1}{|\mathcal{T}_{\text{HF}}|} \int_{\mathcal{T}_{\text{HF}}} f(t) dt.$$

This bracket denotes time averaging, not the inner product notation in Appendix B. An FFR-like shorthand refers to this reduced ratio only for records carrying an admissible  $\pi_{\text{PR}}$ ; the shorthand does not add a clinical measurement model [18, Ch. 5, Sec. 5.5, pp. 72–73] [21, p. 1703]. If  $\pi_{\text{PR}}$  is absent or inadmissible, the pressure ratio is outside the reported output space.

**Convention C.4** (Shear-output convention). Shear terminology is model-tier dependent. A resolved wall shear stress output requires a resolved stress tensor, wall normal, wall location, output operator, and, for a signed component, a chosen tangent direction [16, Abstract, Sec. 2, pp. 8–10]. A reduced shear proxy such as  $\tau_{w,z}^{1D}$  requires the model tier, wall closure, rheology descriptor, velocity-profile or friction closure, evaluation

location or spatial averaging operator, and sign or time-window convention. Reduced shear proxies are closure diagnostics; they are not interchangeable with resolved traction-based wall shear stress unless a separate comparison map is declared.

| Symbol                                                                   | Meaning                                                                                                 | Units             |
|--------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-------------------|
| $R$                                                                      | vessel radius; vessel diameter is $d_v := 2R$                                                           | m                 |
| $d_v$                                                                    | vessel diameter                                                                                         | m                 |
| $\eta$                                                                   | dynamic viscosity                                                                                       | Pa · s            |
| $\nu := \eta/\rho$                                                       | kinematic viscosity                                                                                     | m <sup>2</sup> /s |
| $\eta_{\text{eff}}(\dot{\gamma})$                                        | effective dynamic viscosity for generalized Newtonian models                                            | Pa · s            |
| $\nu_{\text{eff}}(\dot{\gamma}) := \eta_{\text{eff}}(\dot{\gamma})/\rho$ | effective kinematic viscosity after density scaling                                                     | m <sup>2</sup> /s |
| $\tau$                                                                   | shear stress                                                                                            | Pa                |
| $\dot{\gamma}$                                                           | shear rate                                                                                              | s <sup>-1</sup>   |
| $\rho$                                                                   | density field                                                                                           | kg/m <sup>3</sup> |
| $p$                                                                      | pressure field                                                                                          | Pa                |
| $\mathbf{u}$                                                             | velocity field                                                                                          | m/s               |
| $D(\mathbf{u})$                                                          | rate-of-deformation tensor, $D(\mathbf{u}) := \frac{1}{2} (\nabla \mathbf{u} + \nabla \mathbf{u}^\top)$ | s <sup>-1</sup>   |
| $W_0 := d_v \sqrt{\frac{\omega \rho}{\eta}}$                             | Womersley number, diameter-based convention                                                             | —                 |
| Re                                                                       | Reynolds number                                                                                         | —                 |
| Pe                                                                       | Péclet number                                                                                           | —                 |
| $c_{\text{conc}}$                                                        | concentration field when a transport scalar is discussed                                                | —                 |
| $D_m$                                                                    | molecular diffusion coefficient                                                                         | m <sup>2</sup> /s |
| $t$                                                                      | time                                                                                                    | s                 |
| $T$ or $T_{\text{final}}$                                                | terminal time; use $T_{\text{final}}$ where it could be confused with stress tensors                    | s                 |
| $\omega$                                                                 | angular frequency                                                                                       | rad/s             |
| $(r, \theta, z)$                                                         | cylindrical coordinates used only when 3D coordinate forms are written                                  | m, —, m           |
| $(\mathbf{e}_r, \mathbf{e}_\theta, \mathbf{e}_z)$                        | cylindrical orthonormal basis vectors                                                                   | —                 |
| $\tau_{ij}$                                                              | cylindrical viscous-stress component                                                                    | Pa                |
| $\mathbf{f}_b$                                                           | body force per unit mass                                                                                | m/s <sup>2</sup>  |
| $\rho \mathbf{f}_b$                                                      | body force per unit volume                                                                              | N/m <sup>3</sup>  |

The symbols  $\text{Pe}$ ,  $c_{\text{conc}}$ , and  $D_m$  are reserved for a future passive-scalar transport extension, for example

$$\partial_t c_{\text{conc}} + \mathbf{u} \cdot \nabla c_{\text{conc}} = D_m \Delta c_{\text{conc}}, \quad \text{Pe} = \frac{UL}{D_m},$$

where  $\text{Pe}$  compares advective and diffusive scalar transport.

### Reduced-model and forward-map notation.

| Symbol                            | Meaning                                                                                                                                                                                                                      | Units                               |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| $A(z, t)$                         | cross-sectional lumen area in the 1D model                                                                                                                                                                                   | $\text{m}^2$                        |
| $Q(z, t)$                         | volumetric flow rate through a cross-section                                                                                                                                                                                 | $\text{m}^3/\text{s}$               |
| $\bar{u}(z, t) := Q/A$            | section-mean axial velocity                                                                                                                                                                                                  | $\text{m}/\text{s}$                 |
| $I_z = (0, L)$                    | axial single-vessel interval for a 1D formulation                                                                                                                                                                            | $\text{m}$                          |
| $\mathbf{U} = (A, Q)^\top$        | conservative area-flow state vector                                                                                                                                                                                          | $(\text{m}^2, \text{m}^3/\text{s})$ |
| $\mathcal{P}$                     | cross-sectional velocity-profile descriptor used by the 1D closure; admitted values include flat, parabolic, and power-family profiles                                                                                       | mixed                               |
| $\alpha_{\mathcal{P}}$            | momentum-flux correction induced by the declared profile $\mathcal{P}$ ; the parabolic baseline uses $\alpha_{\mathcal{P}} = 4/3$                                                                                            | —                                   |
| $\gamma$                          | power-profile exponent in $u(r) = ((\gamma + 2)/\gamma)\bar{u}(1 - (r/R)^\gamma)$                                                                                                                                            | —                                   |
| $g_{\mathcal{P}}$                 | profile shear-rate factor used by the 1D rheology proxy; for power profiles $g_{\mathcal{P}} = \gamma + 2$ , while flat profiles assign this value explicitly                                                                | —                                   |
| $R(A(z, t)) = \sqrt{A(z, t)/\pi}$ | current reduced lumen radius derived from the 1D area                                                                                                                                                                        | $\text{m}$                          |
| $R_0(z)$                          | reference stenosed radius used by the wall law                                                                                                                                                                               | $\text{m}$                          |
| $R_{\text{base}}(z)$              | nominal healthy baseline radius before applying $s(z)$                                                                                                                                                                       | $\text{m}$                          |
| $\mathcal{R}$                     | rheology descriptor in the 1D model; distinct from radius symbols $R$ , $R_0$ , and $R_{\text{base}}$ ; admitted values are <b>newtonian</b> , <b>carreau</b> , <b>carreau-yasuda</b> , <b>casson</b> , and <b>power-law</b> | mixed                               |
| $\mathcal{W}$                     | wall or FSI closure descriptor; the selected 1D report model uses $\mathcal{W}_{\text{elastic1D}}$ , while fixed-wall, multiscale-coupled, and resolved-FSI models require separate declarations                             | mixed                               |
| $s(z)$                            | dimensionless stenosis profile, with $0 \leq s(z) < 1$                                                                                                                                                                       | —                                   |
| $A_0(z) = \pi R_0(z)^2$           | wall-law reference area after applying the stenosis profile                                                                                                                                                                  | $\text{m}^2$                        |

| Symbol                                           | Meaning                                                                                                                                                                                                | Units                      |
|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| $s_{\max}$                                       | maximum fractional radius-reduction parameter in $s(z)$                                                                                                                                                | —                          |
| $g(z)$                                           | smooth asymmetric stenosis-kernel coordinate                                                                                                                                                           | m                          |
| $\psi(z) = \exp(-\lambda g(z)^4)$                | smooth rapidly localized stenosis kernel used by the baseline profile $s(z) = s_{\max}\psi(z)$                                                                                                         | —                          |
| $z_a$                                            | center of the Gaussian asymmetry term in $g(z)$                                                                                                                                                        | m                          |
| $z_s$                                            | axial shift parameter in $g(z)$                                                                                                                                                                        | m                          |
| $\sigma_a$                                       | width parameter for the Gaussian asymmetry term in $g(z)$                                                                                                                                              | m                          |
| $\kappa$                                         | amplitude of the Gaussian asymmetry term in $g(z)$                                                                                                                                                     | m                          |
| $\lambda$                                        | localization strength in $\psi(z) = \exp(-\lambda g(z)^4)$                                                                                                                                             | $\text{m}^{-4}$            |
| $\beta(z)$                                       | wall-stiffness parameter in $p_g = p_{\text{ext}} + \beta A_0^{-1}(\sqrt{A} - \sqrt{A_0})$                                                                                                             | $\text{Pa} \cdot \text{m}$ |
| $p_{\text{ext}}(z, t)$                           | external-pressure value in the wall-law gauge convention; baseline value $p_{\text{ext}} \equiv 0$ unless declared otherwise                                                                           | Pa                         |
| $\Psi(A, z, t)$ or $\Psi_{\mathcal{W}}(A, z, t)$ | elastic flux potential satisfying $\partial_A \Psi_{\mathcal{W}} = (A/\rho) \partial_A p_g^{\mathcal{W}}$ and normalized by $\Psi_{\mathcal{W}}(A_0(z), z, t) = 0$ when that normalization is declared | $\text{m}^4/\text{s}^2$    |
| <b>F</b>                                         | area-flow flux map; not a residual or objective functional                                                                                                                                             | problem-dependent          |
| <b>S</b>                                         | source-term map in the 1D balance-law template                                                                                                                                                         | problem-dependent          |
| $S_{\text{geom}}^{\mathcal{W}}$                  | fixed-area wall/geometry source associated with the selected reduced wall closure $\mathcal{W}$                                                                                                        | $\text{m}^3/\text{s}^2$    |
| $S_f^{\mathcal{R}}$                              | wall-friction source associated with the selected rheology or effective-viscosity closure $\mathcal{R}$                                                                                                | $\text{m}^3/\text{s}^2$    |
| $\hat{\mathbf{F}}_{i+1/2}^n$                     | numerical flux at a finite-volume cell interface and time level                                                                                                                                        | problem-dependent          |
| $\hat{\mathbf{S}}_i^n$                           | cell source quadrature used by a computed finite-volume scheme                                                                                                                                         | problem-dependent          |
| $\Delta z_i, \Delta t^n$                         | finite-volume cell length and timestep in a computed solve                                                                                                                                             | m, s                       |
| $\dot{\gamma}_{1D}$                              | computed shear-rate proxy $g_{\mathcal{P}} Q /(a\sqrt{a})$ , where $a = R^2$                                                                                                                           | $\text{s}^{-1}$            |
| $\nu_{\text{eff}}^{\mathcal{R}}$                 | closure-indexed effective kinematic viscosity used in the reduced viscous/source and pressure-correction terms                                                                                         | $\text{m}^2/\text{s}$      |

| Symbol                       | Meaning                                                                                                                                                                                                                                                                                       | Units                      |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| $C_f$ or $C_f(z, A)$         | wall-friction coefficient in the 1D source $-C_f Q/A$ ;<br>constant-viscosity value $C_f = 8\pi\eta/\rho$                                                                                                                                                                                     | $\text{m}^2/\text{s}$      |
| $\eta_{\text{fric}}(z, t)$   | dynamic viscosity used by the reduced wall-friction and<br>signed-shear-proxy formula; $\eta_{\text{fric}} = \eta$ for constant-viscosity<br>realizations and $\eta_{\text{fric}} = \eta_{\text{eff}}^{\mathcal{R}}(\dot{\gamma}_{1D})$ for admitted non-Newtonian<br>descriptor realizations | $\text{Pa} \cdot \text{s}$ |
| $c_{\text{wave}}$ or $c$     | 1D pulse-wave speed, $c^2 = (A/\rho)\partial_A p_{\text{g}}$ when no concentration<br>field is in scope                                                                                                                                                                                       | $\text{m}/\text{s}$        |
| $e \in \mathcal{E}$          | expert/closure record for a closure-indexed 1D forward-map<br>family; suppress $e$ only for single-expert baseline records                                                                                                                                                                    | mixed                      |
| $\mathcal{G}_{1D,h}^{r_h,e}$ | computed fixed-grid 1D map indexed by numerical record $r_h$<br>and expert record $e$                                                                                                                                                                                                         | mixed                      |

| Symbol                                                                            | Meaning                                                                                                                                                                 | Units                  |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| $p_{3D}$                                                                          | continuum pressure in the 3D/NS setting                                                                                                                                 | Pa                     |
| $p_{3D,g}$                                                                        | continuum pressure after subtracting the wall-law gauge reference                                                                                                       | Pa                     |
| $p_g$                                                                             | 1D gauge pressure produced by the wall law                                                                                                                              | Pa                     |
| $p_{\text{ratio}} := p_{\text{ref}} + p_g$                                        | field-level reference-consistent pressure shorthand; ratio traces are defined after scalar observation by Convention C.3                                                | Pa                     |
| $p_{\text{ref}}$                                                                  | fixed pressure reference recorded by the ratio-output specification                                                                                                     | Pa                     |
| $\mathcal{O}_{\text{prox}}, \mathcal{O}_{\text{dist}}$                            | proximal and distal scalar pressure observation maps declared for pressure-drop or pressure-ratio outputs                                                               | input/output Pa        |
| $P_{\text{prox}}, P_{\text{dist}}$                                                | observed proximal and distal gauge-pressure traces after applying the declared pressure observation maps                                                                | Pa                     |
| $P_{\text{prox}}^{\text{ratio}}, P_{\text{dist}}^{\text{ratio}}$                  | observed proximal and distal pressure traces after adding $p_{\text{ref}}$                                                                                              | Pa                     |
| $\pi_{\Delta p} = (z_{\text{prox}}, z_{\text{dist}})$                             | 1D shorthand pressure-drop tap specification; the observation maps define the actual scalar traces                                                                      | m, m                   |
| $\pi_{\text{PR}}$                                                                 | ratio-output specification $(\mathcal{O}_{\text{prox}}, \mathcal{O}_{\text{dist}}, \mathcal{T}_{\text{HF}}, p_{\text{ref}})$ ; axial taps may be specified by shorthand | mixed                  |
| $\langle f \rangle_{\mathcal{T}_{\text{HF}}}$                                     | time average of an integrable trace over the declared high-flow window; not the Appendix B inner product                                                                | same as $f$            |
| $\langle P_{\text{prox}}^{\text{ratio}} \rangle_{\mathcal{T}_{\text{HF}}} \neq 0$ | denominator admissibility condition required before $\text{PR}_{1D}$ is reported                                                                                        | —                      |
| $p_{\text{out},g}$                                                                | prescribed outlet gauge pressure in the same reference frame as $p_g$                                                                                                   | Pa                     |
| $\Delta p(t)$                                                                     | proximal-minus-distal scalar pressure trace after the declared observations                                                                                             | Pa                     |
| $\overline{\Delta p}_{\mathcal{T}_{\text{HF}}}$                                   | scalar pressure-drop output averaged over the declared high-flow window $\mathcal{T}_{\text{HF}}$                                                                       | Pa                     |
| FFR-like shorthand                                                                | optional shorthand for $\text{PR}_{1D}$ only when Convention C.3 and admissibility requirements are met                                                                 | —                      |
| $\text{PR}_{1D}(\pi_{\text{PR}})$                                                 | reduced pressure-ratio output under the declared observation maps, pressure reference, and averaging window                                                             | —                      |
| $\tau_w$ or $ \tau_w $                                                            | resolved traction-based wall-shear-stress output after declaring the stress tensor, wall normal, location, and output operator                                          | Pa                     |
| $\tau_{w,z}^{1D}$                                                                 | signed 1D axial shear proxy after declaring the model tier, closures, location, and sign or window convention                                                           | Pa                     |
| <b>shear_rate_1.s</b>                                                             | CSV output field for the computed shear-rate proxy $\dot{\gamma}_{1D}$                                                                                                  | $\text{s}^{-1}$        |
| <b>nu_eff_cm2.s</b>                                                               | CSV output field for the effective kinematic viscosity used by the declared rheology closure                                                                            | $\text{cm}^2/\text{s}$ |
| <b>rheology</b>                                                                   | CSV and summary output field naming the declared rheology descriptor                                                                                                    | —                      |

*Remark C.5* (Viscosity notation). We write  $\eta$  for dynamic viscosity and

$$\nu := \frac{\eta}{\rho}$$

for kinematic viscosity. The distinction is dimensional: this report follows the convention that the coefficient in the Cauchy stress tensor is a dynamic viscosity:  $D(\mathbf{u})$  has units of inverse time, so  $\eta D(\mathbf{u})$  has pressure units. For generalized Newtonian models, the scalar viscosity function multiplying  $2D(\mathbf{u})$  in the extra stress is likewise an effective dynamic viscosity, denoted

$$\eta_{\text{eff}}(\dot{\gamma}), \quad \dot{\gamma} := \sqrt{2\mathbf{D}(\mathbf{u}) : \mathbf{D}(\mathbf{u})}.$$

Here “this quantity” means the stress-level viscosity coefficient, not the divided-by-density coefficient. Several sources write the generalized viscosity function as  $\mu(|D|^2)$ , while related hemodynamics sources also use  $\mu$  for viscosity coefficients in reduced and continuum settings [1, Sec. 3.1, p. 35, Sec. 3.6, p. 215] [16, Sec. 1.1, pp. 6–7, Eqs. (1.2)–(1.4), Fig. 4.4, p. 18]. To keep this report unambiguous,  $\nu$  is always kinematic viscosity, while  $\eta$  and  $\eta_{\text{eff}}$  are dynamic viscosities.

## D Mathematical Foundations

This appendix supplies citation anchors for the analytic notation used in the main chapters and in Appendix B. It separates domain and boundary language, classical function spaces, field notation, differential operators, and norm conventions so later sections can cite only the convention they need.

**Convention D.1** (Standing regularity convention). Unless a section states a stronger or weaker hypothesis, classical identities are used only under the regularity needed for their terms to be defined. In particular, fields have the displayed classical derivatives in the indicated domains, boundary traces are defined when boundary terms are written, and integration-by-parts or adjoint identities are invoked only when the required boundary terms are meaningful. When a weak formulation is discussed, the relevant Sobolev space, trace theorem, and boundary regularity assumptions are stated explicitly; Sobolev traces are not inferred from this classical convention. At minimum, boundaries are assumed piecewise  $C^1$  when classical boundary integrals or integration-by-parts identities are used. Outward unit normals are then interpreted on the regular boundary pieces, hence surface-a.e. When a pointwise normal derivative is asserted on all of  $\partial\Omega$ , the boundary is assumed at least  $C^1$ .

**Definition D.2** (Domain and boundary notation). Let  $\Omega \subset \mathbb{R}^n$  be a bounded open connected set, with  $n \in \mathbb{N}$ , and denote its closure by  $\overline{\Omega}$ . In the hemodynamics settings considered in this report, only  $n \in [3]$  is used. The standing regularity convention in Convention D.1 applies whenever traces, outward unit normals, or integration by parts are used. For open  $\Omega$ ,

$$\overline{\Omega} = \Omega \cup \partial\Omega, \quad \partial\Omega = \overline{\Omega} \setminus \Omega.$$

Since  $\Omega$  is bounded,  $\overline{\Omega}$  is closed and bounded and is therefore compact by the Heine–Borel theorem. The open set  $\Omega$  itself need not be compact. Since  $\Omega$  is bounded,  $\partial\Omega$  is also compact. When the standing regularity convention supplies a piecewise  $C^1$  boundary, the outward unit normal  $\hat{n}$  is interpreted on the regular boundary pieces, hence  $dS_{\mathbf{x}}$ -a.e. on  $\partial\Omega$ .

**Definition D.3** (Time intervals and compact space-time sets). For a final time  $T_{\text{final}} > 0$ , this report uses

$$I_T := (0, T_{\text{final}}), \quad \overline{I}_T := [0, T_{\text{final}}].$$

The open interval  $I_T$  is used for interior-time differential identities and space-time PDE regions, while  $\overline{I}_T$  is used when initial-time data, endpoint data, sampled time grids, or flow maps are included. When a local final time such as  $T_*$  is stated, the same convention applies with  $T_{\text{final}}$  replaced by that local final time.

For one-dimensional output fields, a compact space-time rectangle is written as

$$K := [0, \ell] \times [0, T_{\text{final}}]$$

or by an explicitly stated local variant. Spaces such as  $C(K)$  and  $C^1([0, \ell])$  mean continuous functions on the named compact set, with the supremum norm when a norm is written. Spaces such as  $L^p(K)$  use the product Lebesgue measure and the same almost-everywhere convention as Definition D.7.

**Definition D.4** (Field and multi-index notation). For  $\Omega \subset \mathbb{R}^n$ , we use the following field notation:

$\phi : \Omega \rightarrow \mathbb{R}$  is a *scalar field*,

$\mathbf{f} : \Omega \rightarrow \mathbb{R}^n$  is a *vector field*,

$\mathbf{T} : \Omega \rightarrow \mathbb{R}^{n \times n}$  is a (*second-order*) *tensor field*,

and we write  $\phi(\mathbf{x})$ ,  $\mathbf{f}(\mathbf{x})$ , and  $\mathbf{T}(\mathbf{x})^1$  for the values at a point  $\mathbf{x} \in \Omega$ . When referring to a physical quantity, its measurement units are indicated as  $[ \cdot ]$ , whereas dimensionless quantities are indicated as  $[ - ]$ . The  $k$ -th partial derivative of  $\phi$  with respect to coordinate  $x_i$  is

$$\partial_{x_i}^k \phi \equiv \frac{\partial^k \phi}{\partial x_i^k}.$$

For a multi-index  $\alpha = (\alpha_1, \dots, \alpha_n) \in \mathbb{N}_0^n$ , set  $|\alpha| = \alpha_1 + \dots + \alpha_n$ . When the derivative exists classically, the corresponding derivative of a scalar field  $\phi$  is

$$D^\alpha \phi \equiv \frac{\partial^{|\alpha|} \phi}{\partial x_1^{\alpha_1} \partial x_2^{\alpha_2} \dots \partial x_n^{\alpha_n}}.$$

For  $|\alpha| = 1$ ,  $D^\alpha \phi$  is a first-order partial derivative of  $\phi$ , e.g.  $\partial_{x_i} \phi$  where  $\alpha_i = 1$  and  $\alpha_j = 0$  for all  $j \in [n] \setminus \{i\}$ .

**Definition D.5** (Classical function-space notation). Given a domain  $\Omega$  and a scalar field  $\mathbb{F} \in \{\mathbb{R}, \mathbb{C}\}$ , a scalar function space on  $\Omega$  is an  $\mathbb{F}$ -vector subspace of the maps  $f : \Omega \rightarrow \mathbb{F}$ . Unless a complex-valued space is explicitly specified, this report uses real-valued spaces. Thus  $C^0(\Omega)$  denotes the real-valued continuous functions on the open domain  $\Omega$ . For  $k \in \mathbb{N}_0$ ,  $C^k(\Omega)$  denotes functions  $\phi : \Omega \rightarrow \mathbb{R}$  such that  $D^\alpha \phi$  exists and is continuous in  $\Omega$  for every  $|\alpha| \leq k$ . By contrast,  $C^k(\overline{\Omega})$  denotes functions in  $C^k(\Omega)$  whose derivatives through order  $k$  extend continuously to the closure  $\overline{\Omega}$ . The space  $C^\infty(\Omega)$  is the intersection of all  $C^k(\Omega)$  for  $k \in \mathbb{N}_0$ , i.e. the infinitely differentiable functions on  $\Omega$ . The notation  $C^k(\Omega; \mathbb{R}^m)$  denotes the maps  $\mathbf{f} : \Omega \rightarrow \mathbb{R}^m$  with components in  $C^k(\Omega)$ , i.e.,  $\mathbf{f} = (f_i)_{i \in [m]}$  with  $f_i \in C^k(\Omega)$  for all  $i \in [m]$ .

**Definition D.6** (Differential-operator conventions). For real-valued  $\phi \in C^1(\Omega)$ , the partial derivative with respect to coordinate  $x_i$  is

$$\partial_{x_i} \phi = \frac{\partial \phi}{\partial x_i}.$$

---

<sup>1</sup>A second-order tensor value  $\mathbf{T}(\mathbf{x}) \in \mathbb{R}^{n \times n}$  can be identified with the matrix of a linear map  $\mathbb{R}^n \rightarrow \mathbb{R}^n$  acting on vectors by matrix-vector multiplication.

Named-coordinate partial derivatives use the same compact convention; for example,

$$\partial_t \phi = \frac{\partial \phi}{\partial t}, \quad \partial_z f = \frac{\partial f}{\partial z}, \quad \partial_{Ap} = \frac{\partial p}{\partial A}.$$

Cylindrical derivatives such as  $\partial_r u$  and  $\partial_\theta u$  are read analogously. Boundary notation retains  $\partial$ , as in  $\partial V(t)$  and  $\partial \Omega$ . For  $\mathbf{x} \in \Omega$  and a direction  $\mathbf{v} \in \mathbb{R}^n$ , the directional derivative is

$$D_{\mathbf{v}} \phi(\mathbf{x}) := \langle \nabla \phi(\mathbf{x}), \mathbf{v} \rangle_{\mathbb{R}^n}.$$

If  $\phi \in C^1(\overline{\Omega})$ ,  $\mathbf{x} \in \partial \Omega$ , and  $\hat{\mathbf{n}}$  is the outward unit normal at  $\mathbf{x}$ , then the boundary normal derivative is

$$\partial_{\hat{\mathbf{n}}} \phi(\mathbf{x}) := \langle \nabla \phi(\mathbf{x}), \hat{\mathbf{n}} \rangle_{\mathbb{R}^n}.$$

For Lebesgue measure  $d\mathbf{x}$  on  $\mathbb{R}^n$  the integral of  $\phi$  in  $\Omega$  is

$$\int_{\Omega} \phi(\mathbf{x}) d\mathbf{x}.$$

If  $\partial \Omega$  is of class  $C^1$  and  $\phi \in C^0(\overline{\Omega})$ , then the classical boundary trace  $\phi|_{\partial \Omega}$  is continuous on  $\partial \Omega$ . Since  $\Omega$  is bounded and  $\partial \Omega$  is a compact  $C^1$  hypersurface, this trace belongs to  $L^1(\partial \Omega; dS_{\mathbf{x}})$ . The corresponding boundary integral is written

$$\int_{\partial \Omega} \phi(\mathbf{x}) dS_{\mathbf{x}}.$$

We use the column-gradient convention for scalar fields. For  $\phi \in C^1(\Omega)$ , the gradient is

$$\nabla \phi := (\partial_{x_i} \phi)_{i \in [n]} \in \mathbb{R}^n.$$

For  $\phi \in C^2(\Omega)$ , the Laplacian is

$$\Delta \phi := \nabla \cdot \nabla \phi = \sum_{i \in [n]} \partial_{x_i}^2 \phi.$$

For vector-valued  $\mathbf{f} \in C^1(\Omega; \mathbb{R}^n)$  with components  $\mathbf{f} = (f_i)_{i \in [n]}$ , the vector gradient is the Jacobian with entries  $(\nabla \mathbf{f})_{ij} := \partial_{x_j} f_i$ . The divergence is the trace of this Jacobian:

$$\operatorname{div} \mathbf{f} := \nabla \cdot \mathbf{f} = \sum_{i \in [n]} \partial_{x_i} f_i = \operatorname{tr}(\nabla \mathbf{f}).$$

For  $\mathbf{f} \in C^2(\Omega; \mathbb{R}^n)$ , the Laplacian is defined componentwise. The domain integral is also componentwise

whenever the components are integrable:

$$\begin{aligned}\Delta \mathbf{f} &:= (\Delta f_i)_{i \in [n]} \\ \int_{\Omega} \mathbf{f}(\mathbf{x}) \, d\mathbf{x} &:= \left( \int_{\Omega} f_i(\mathbf{x}) \, d\mathbf{x} \right)_{i \in [n]}.\end{aligned}$$

For tensor-valued  $\mathbf{T} \in C^1(\Omega; \mathbb{R}^{n \times n})$  with entries  $\mathbf{T} = (T_{ij})_{i,j \in [n]}$ , we use the row-divergence convention  $(\operatorname{div} \mathbf{T})_i = \sum_{j \in [n]} \partial_{x_j} T_{ij}$ . Equivalently, if  $\mathbf{t}_i = (T_{ij})_{j \in [n]}$  denotes the  $i$ -th row of  $\mathbf{T}$ , then

$$\begin{aligned}\operatorname{div} \mathbf{T} &:= (\operatorname{div} \mathbf{t}_i)_{i \in [n]} \\ &= (\nabla \cdot \mathbf{t}_i)_{i \in [n]} \\ &= \left( \sum_{j \in [n]} \partial_{x_j} T_{ij} \right)_{i \in [n]}.\end{aligned}$$

For  $\mathbf{T} \in C^2(\Omega; \mathbb{R}^{n \times n})$ , the Laplacian is defined componentwise. The domain integral is also defined componentwise whenever the entries are integrable:

$$\begin{aligned}\Delta \mathbf{T} &:= (\Delta T_{ij})_{i,j \in [n]} \\ \int_{\Omega} \mathbf{T}(\mathbf{x}) \, d\mathbf{x} &:= \left( \int_{\Omega} T_{ij}(\mathbf{x}) \, d\mathbf{x} \right)_{i,j \in [n]}.\end{aligned}$$

**Definition D.7** ( $C^k$  and  $L^p$  norm conventions). Let  $\Omega \subset \mathbb{R}^n$  be bounded and open. We write  $C^k(\overline{\Omega})$  for the functions  $\phi \in C^k(\Omega)$  such that each derivative  $D^\alpha \phi$ ,  $|\alpha| \leq k$ , extends continuously to  $\overline{\Omega}$ . The norm is

$$\|\phi\|_{C^k(\overline{\Omega})} := \sum_{|\alpha| \leq k} \sup_{\mathbf{x} \in \overline{\Omega}} |D^\alpha \phi(\mathbf{x})|.$$

With this norm,  $C^k(\overline{\Omega})$  is a Banach space: every Cauchy sequence in  $C^k(\overline{\Omega})$  converges, with respect to  $\|\cdot\|_{C^k(\overline{\Omega})}$ , to a limit in  $C^k(\overline{\Omega})$ . In particular, for  $k = 0$ , we have

$$\|\phi\|_{C^0(\overline{\Omega})} := \sup_{\mathbf{x} \in \overline{\Omega}} |\phi(\mathbf{x})| = \max_{\mathbf{x} \in \overline{\Omega}} |\phi(\mathbf{x})|.$$

For continuous functions on compact sets, the max norm agrees with the usual supremum norm.

For  $1 \leq p < \infty$ ,  $L^p(\Omega)$  denotes the space of equivalence classes of real-valued measurable functions on  $\Omega$ , identified up to equality almost everywhere, with finite norm

$$\|\phi\|_{L^p(\Omega)} := \left( \int_{\Omega} |\phi(\mathbf{x})|^p \, d\mathbf{x} \right)^{1/p}.$$

For  $p = \infty$ ,

$$\|\phi\|_{L^\infty(\Omega)} := \operatorname{ess\,sup}_{\mathbf{x} \in \Omega} |\phi(\mathbf{x})|.$$

With this almost-everywhere identification,  $L^p(\Omega)$  is a Banach space for  $1 \leq p \leq \infty$ .

The notation  $L^p(\Omega; \mathbb{R}^m)$  denotes equivalence classes of measurable maps  $\mathbf{f} : \Omega \rightarrow \mathbb{R}^m$ , identified up to equality a.e., whose components belong to  $L^p(\Omega)$ , i.e.,  $\mathbf{f} = (f_i)_{i \in [m]}$  with  $f_i \in L^p(\Omega)$  for all  $i \in [m]$ . When a norm on  $L^p(\Omega; \mathbb{R}^m)$  is needed, we use the Euclidean norm in the range. For  $1 \leq p < \infty$ ,

$$\|\mathbf{f}\|_{L^p(\Omega; \mathbb{R}^m)} := \left( \int_{\Omega} \|\mathbf{f}(\mathbf{x})\|_{\mathbb{R}^m}^p d\mathbf{x} \right)^{1/p}.$$

For  $p = \infty$ , the corresponding convention is

$$\|\mathbf{f}\|_{L^\infty(\Omega; \mathbb{R}^m)} := \operatorname{ess\,sup}_{\mathbf{x} \in \Omega} \|\mathbf{f}(\mathbf{x})\|_{\mathbb{R}^m}.$$

For matrix or second-order tensor values, the pointwise range norm is the Frobenius norm

$$\|\mathbf{T}\|_{\mathrm{F}} := (\mathbf{T} : \mathbf{T})^{1/2} = \left( \sum_{i,j \in [n]} T_{ij}^2 \right)^{1/2}.$$

Thus tensor-valued  $L^p$  norms are formed by replacing  $|\phi(\mathbf{x})|$  in the scalar  $L^p$  formula with  $\|\mathbf{T}(\mathbf{x})\|_{\mathrm{F}}$ .

## E Continuum Derivation Details

This appendix supplements the continuum mechanics details that support the main-body assumptions without interrupting the reduced-order forward-model narrative within this report. It is appendix background for notation and model hierarchy, not additional evidence for the numerical study. All identities below are classical identities under the regularity needed for the displayed derivatives, traces, and changes of variables. The standing regularity convention, boundary notation, and differential-operator convention are those of Convention D.1, Definition D.2, and Definition D.6. In particular,  $\mathbf{div}$  is the row-divergence of a tensor field, and boundary forms assume the stated trace and normal hypotheses; no weak formulation is being asserted in this appendix.

### E.1 Material Derivative and Trajectory Details

For a scalar field  $\phi \in C^1(\mathcal{Q}_T)$  and a sufficiently regular flow map  $\mathcal{L}_t$ , define the Lagrangian pullback  $\widehat{\phi}(t, \boldsymbol{\xi}) := \phi(t, \mathcal{L}_t(\boldsymbol{\xi}))$ . Differentiating with respect to time along a trajectory and using  $\partial_t \mathcal{L}_t(\boldsymbol{\xi}) = \mathbf{u}(t, \mathcal{L}_t(\boldsymbol{\xi}))$  gives

$$\frac{d}{dt}\phi(t, \mathcal{L}_t(\boldsymbol{\xi})) = \partial_t \phi(t, \mathbf{x}) + \nabla \phi(t, \mathbf{x}) \cdot \mathbf{u}(t, \mathbf{x}), \quad \mathbf{x} = \mathcal{L}_t(\boldsymbol{\xi}).$$

The identity

$$\operatorname{div}(\phi \mathbf{u}) = \nabla \phi \cdot \mathbf{u} + \phi \operatorname{div} \mathbf{u}$$

also gives

$$D_t \phi = \partial_t \phi + \operatorname{div}(\phi \mathbf{u}) - \phi \operatorname{div} \mathbf{u}.$$

### E.2 Jacobian Evolution and Reynolds Transport

Let  $\widehat{\mathbf{F}}_t = \nabla_{\boldsymbol{\xi}} \mathcal{L}_t$  and  $\widehat{J}_t = \det \widehat{\mathbf{F}}_t$ . Here  $\mathcal{L}_t$  is assumed to be an orientation-preserving  $C^1$  change of variables on the material volume being considered, with the additional time regularity needed to differentiate  $\widehat{\mathbf{F}}_t$  and  $\widehat{J}_t$ . The standard Jacobi identity gives

$$\partial_t \widehat{J}_t = \widehat{J}_t \operatorname{tr} \left( \partial_t \widehat{\mathbf{F}}_t \widehat{\mathbf{F}}_t^{-1} \right) = \widehat{J}_t \operatorname{div} \mathbf{u}(t, \mathcal{L}_t(\boldsymbol{\xi})),$$

which is the Lagrangian form of  $D_t J_t = J_t \operatorname{div} \mathbf{u}$  [2, Part I, Ch. 1, Sec. 1.3].

For  $V(t) = \mathcal{L}_t(V(0))$ , change variables in  $I(t) = \int_{V(t)} \phi(t, \mathbf{x}) d\mathbf{x}$ :

$$I(t) = \int_{V(0)} \phi(t, \mathcal{L}_t(\boldsymbol{\xi})) \widehat{J}_t(\boldsymbol{\xi}) d\boldsymbol{\xi}.$$

Differentiating under the integral sign and substituting the Jacobian-evolution identity gives

$$I'(t) = \int_{V(t)} (D_t \phi + \phi \operatorname{div} \mathbf{u}) d\mathbf{x} = \int_{V(t)} (\partial_t \phi + \operatorname{div}(\phi \mathbf{u})) d\mathbf{x}.$$

If  $V(t)$  has Lipschitz boundary and the trace of  $\phi \mathbf{u}$  is integrable on  $\partial V(t)$ , the divergence theorem gives the boundary form

$$I'(t) = \int_{V(t)} \partial_t \phi d\mathbf{x} + \int_{\partial V(t)} \phi \mathbf{u} \cdot \hat{\mathbf{n}} dS.$$

### E.3 Linear Momentum Balance Details

Starting from the material-volume balance

$$\frac{d}{dt} \int_{V(t)} \rho \mathbf{u} dV = \int_{\partial V(t)} \mathbf{T} \hat{\mathbf{n}} dS + \int_{V(t)} \rho \mathbf{f}_b dV,$$

Reynolds transport gives

$$\frac{d}{dt} \int_{V(t)} \rho \mathbf{u} dV = \int_{V(t)} (D_t(\rho \mathbf{u}) + \rho \mathbf{u} \operatorname{div} \mathbf{u}) dV.$$

Using mass conservation,  $D_t \rho + \rho \operatorname{div} \mathbf{u} = 0$ , this reduces to

$$\int_{V(t)} \rho D_t \mathbf{u} dV = \int_{V(t)} \rho (\partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u}) dV.$$

The surface traction term satisfies

$$\int_{\partial V(t)} \mathbf{T} \hat{\mathbf{n}} dS = \int_{V(t)} \operatorname{div}(\mathbf{T}) dV.$$

This is the tensor row-divergence convention from Definition D.6, applied under the regularity needed for the stress trace  $\mathbf{T} \hat{\mathbf{n}}$  and the volume integral of  $\operatorname{div} \mathbf{T}$ . Since  $V(t)$  is arbitrary within the localization class, the differential form is

$$\rho (\partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u}) = \operatorname{div}(\mathbf{T}) + \rho \mathbf{f}_b.$$

The conservative Eulerian form

$$\partial_t(\rho \mathbf{u}) + \mathbf{div}(\rho \mathbf{u} \otimes \mathbf{u}) = \mathbf{div}(\mathbf{T}) + \rho \mathbf{f}_b$$

is equivalent whenever the continuity equation holds, because

$$\partial_t(\rho \mathbf{u}) + \mathbf{div}(\rho \mathbf{u} \otimes \mathbf{u}) = \rho (\partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u}) + \mathbf{u} (\partial_t \rho + \mathbf{div}(\rho \mathbf{u})) .$$

## F Navier–Stokes Coordinate and Energy Details

This appendix collects mathematical orientation material for the 3D Navier–Stokes model. It is background for the continuum hierarchy; it is not evidence for the 1D study specification or any downstream validation claim. All formulas are read under the standing regularity and differential-operator conventions in Appendix D. In particular,  $\mathbf{div}$  is row-divergence for tensor fields,  $\Delta \mathbf{u}$  is the componentwise vector Laplacian, tensor norms are Frobenius norms when written, and  $\eta$  is dynamic viscosity while  $\nu = \eta/\rho$  is kinematic viscosity as in Remark C.5.

### F.1 Viscous-Term Simplification and Energy Context

For a Newtonian fluid with constant dynamic viscosity  $\eta$  and sufficiently smooth velocity field,

$$\mathbf{div}(2\eta \mathbf{D}(\mathbf{u})) = \eta \mathbf{div}(\nabla \mathbf{u} + \nabla \mathbf{u}^\top) = \eta \Delta \mathbf{u} + \eta \nabla(\mathbf{div} \mathbf{u}).$$

For incompressible flow,  $\mathbf{div} \mathbf{u} = 0$ , so

$$\mathbf{div}(2\eta \mathbf{D}(\mathbf{u})) = \eta \Delta \mathbf{u}, \quad \rho^{-1} \mathbf{div}(2\eta \mathbf{D}(\mathbf{u})) = \nu \Delta \mathbf{u}, \quad \nu = \eta/\rho.$$

This term is the momentum-diffusion contribution; it does not disappear in the incompressible Newtonian limit.

Classical local well-posedness results for Navier–Stokes depend on the domain, boundary conditions, forcing, initial-data space, and solution class. Under sufficiently smooth compatible data one obtains a unique strong solution on a maximal time interval. If the maximal interval is finite, continuation fails through blow-up of the norm controlled by the chosen well-posedness theory.

### F.2 Cylindrical Coordinate Form

For  $(r, \theta, z)$  with orthonormal basis  $(\mathbf{e}_r, \mathbf{e}_\theta, \mathbf{e}_z)$ ,

$$x = r \cos \theta, \quad y = r \sin \theta, \quad \mathbf{u} = u_r \mathbf{e}_r + u_\theta \mathbf{e}_\theta + u_z \mathbf{e}_z.$$

The component formulas are local cylindrical-coordinate formulas on patches where  $r > 0$ . Axis regularity, wall traces, and boundary conditions require separate hypotheses and are not supplied by the coordinate

notation alone. The differential operators used in cylindrical divided-by-density Navier–Stokes forms are

$$\begin{aligned}(\mathbf{u} \cdot \nabla) &= u_r \partial_r + \frac{u_\theta}{r} \partial_\theta + u_z \partial_z, \\ \nabla p &= \partial_r p \mathbf{e}_r + \frac{1}{r} \partial_\theta p \mathbf{e}_\theta + \partial_z p \mathbf{e}_z, \\ \operatorname{div} \mathbf{u} &= \frac{1}{r} \partial_r(r u_r) + \frac{1}{r} \partial_\theta u_\theta + \partial_z u_z.\end{aligned}$$

The rate-of-deformation components in the cylindrical orthonormal basis are

$$\begin{aligned}D_{rr} &= \partial_r u_r, & D_{\theta\theta} &= \frac{1}{r} \partial_\theta u_\theta + \frac{u_r}{r}, & D_{zz} &= \partial_z u_z, \\ D_{r\theta} &= \frac{1}{2} \left( \partial_r u_\theta - \frac{u_\theta}{r} + \frac{1}{r} \partial_\theta u_r \right), & D_{rz} &= \frac{1}{2} (\partial_r u_z + \partial_z u_r), & D_{\theta z} &= \frac{1}{2} \left( \frac{1}{r} \partial_\theta u_z + \partial_z u_\theta \right).\end{aligned}$$

Use the scalar shear-rate convention  $\dot{\gamma} = \sqrt{2\mathbf{D}(\mathbf{u}) : \mathbf{D}(\mathbf{u})}$ . Then

$$\tau_{ij} = 2\eta_{\text{eff}}(\dot{\gamma}) D_{ij}, \quad i, j \in \{r, \theta, z\}.$$

When a source writes the law as a function of  $D : D$  or  $|D|_{\mathbb{F}}^2$ , this report translates it through this convention, consistent with Remark C.5. Writing  $\mathbf{f} = f_r \mathbf{e}_r + f_\theta \mathbf{e}_\theta + f_z \mathbf{e}_z$ , the momentum components are

$$\begin{aligned}(\text{radial}) \quad & \partial_t u_r + u_r \partial_r u_r + \frac{u_\theta}{r} \partial_\theta u_r + u_z \partial_z u_r - \frac{u_\theta^2}{r} \\ &= -\frac{1}{\rho} \partial_r p + \frac{1}{\rho} \left[ \frac{1}{r} \partial_r(r \tau_{rr}) + \frac{1}{r} \partial_\theta \tau_{r\theta} + \partial_z \tau_{rz} - \frac{1}{r} \tau_{\theta\theta} \right] + f_r, \\ (\text{azimuthal}) \quad & \partial_t u_\theta + u_r \partial_r u_\theta + \frac{u_\theta}{r} \partial_\theta u_\theta + u_z \partial_z u_\theta + \frac{u_r u_\theta}{r} \\ &= -\frac{1}{\rho r} \partial_\theta p + \frac{1}{\rho} \left[ \frac{1}{r} \partial_r(r \tau_{r\theta}) + \frac{1}{r} \partial_\theta \tau_{\theta\theta} + \partial_z \tau_{\theta z} + \frac{1}{r} \tau_{r\theta} \right] + f_\theta, \\ (\text{axial}) \quad & \partial_t u_z + u_r \partial_r u_z + \frac{u_\theta}{r} \partial_\theta u_z + u_z \partial_z u_z \\ &= -\frac{1}{\rho} \partial_z p + \frac{1}{\rho} \left[ \frac{1}{r} \partial_r(r \tau_{rz}) + \frac{1}{r} \partial_\theta \tau_{\theta z} + \partial_z \tau_{zz} \right] + f_z.\end{aligned}$$

The incompressibility condition is

$$\frac{1}{r} \partial_r(r u_r) + \frac{1}{r} \partial_\theta u_\theta + \partial_z u_z = 0.$$

## G Numerical Methods Details

This appendix supplies the numerical-method detail behind Section 1.2.3 and the comparison boundary in Section 1.3. It is supporting method detail, not a claim of external-solver parity for the implemented solver. The continuous identities are read under Convention D.1; computed quantities are read through the following numerical-record convention.

**Convention G.1** (Computed realization record). A computed realization is interpreted only through the model, closure, discretization, grid, timestep policy, boundary-state rule, output operator, and diagnostic metadata recorded for that realization. Symbols such as  $D_t$ ,  $D_z$ , numerical fluxes, residual arrays, and sampled norms denote recorded discrete objects unless a section explicitly switches back to a continuum identity.

The time interval, output rectangle, and norm notation follow Definition D.3 and Definition D.7; discrete residuals use the recorded  $D_t$ ,  $D_z$ , grid, and quadrature weights rather than unnamed continuum derivatives.

### G.1 Elastic-potential balance-law form

The reduced state is  $\mathbf{U} = (A, Q)^\top$ . For the  $\mathcal{W}_{\text{elastic1D}}$  balance-law contract with prescribed momentum-flux correction  $\alpha$ , the reference elastic-potential form is

$$\begin{aligned}\partial_t A + \partial_z Q &= 0, \\ \partial_t Q + \partial_z \left( \alpha \frac{Q^2}{A} + \Psi(A, z, t) \right) &= S_{\text{geom}}(A, z, t) - C_f(z, A, Q) \frac{Q}{A}.\end{aligned}$$

The elastic potential satisfies

$$\partial_A \Psi(A, z, t) = \frac{A}{\rho} \partial_A p_g(A, z, t),$$

and the geometry source is

$$S_{\text{geom}}(A, z, t) = \partial_z \Psi(A, z, t)|_A - \frac{A}{\rho} \partial_z p_g(A, z, t)|_A.$$

For the baseline wall law, assuming  $p_{\text{ext}}$  is independent of  $A$ ,

$$c^2(A, z) = \frac{A}{\rho} \partial_A p_g(A, z, t) = \frac{\beta(z) \sqrt{A}}{2\rho A_0(z)}.$$

Freeze  $z$ , the wall-closure data, and the source terms, and consider the homogeneous  $(A, Q)$  flux Jacobian associated with  $(Q, \alpha Q^2/A + \Psi(A, z, t))^\top$ . On a positive-area state  $A > 0$ , with flow rate  $Q$ , mean velocity

$Q/A$ , prescribed momentum-flux correction  $\alpha$ , and  $c^2(A, z) := (A/\rho)\partial_A p_g(A, z, t)$ , its eigenvalues are

$$\lambda_{\pm}(A, Q; z) = \alpha \frac{Q}{A} \pm \sqrt{c^2(A, z) + \alpha(\alpha - 1) \left(\frac{Q}{A}\right)^2}.$$

For the displayed elastic wall law,  $c^2 > 0$  when  $\beta > 0$ ,  $A > 0$ ,  $A_0 > 0$ , and  $\rho > 0$ . Thus the positive-area region is strictly hyperbolic under the stated wall-law assumptions. These speeds reduce to  $Q/A \pm c(A, z)$  in the special  $\alpha = 1$  reference case. The subcritical case used in Assumption 1.35 is  $\lambda_- < 0 < \lambda_+$ , so one characteristic enters through the inlet, one characteristic enters through the outlet, and one scalar boundary condition is imposed at each end of the vessel. The displayed derivatives of  $A_0$ ,  $\beta$ ,  $p_g$ , and  $\Psi$  are continuum notation for the model contract. A computed record may realize them through explicitly recorded finite-difference or source-split operators; changing that realization changes the computed map.

## G.2 Semi-discrete solver operator

The implemented solver stores a radius-squared area coordinate in the variable **A**. In this subsection write that coordinate as  $a = R^2$ . The physical circular cross-sectional area is  $A_{\text{phys}} = \pi a$ . This is a solver-specific convention; the continuum and classical 1D model sections keep  $A$  for physical cross-sectional area.

For  $N$  finite-volume cells, let

$$z_i = \left(i - \frac{1}{2}\right) \Delta z, \quad \Delta z = \frac{L}{N}, \quad u_h(t) = (a_1(t), \dots, a_N(t), Q_1(t), \dots, Q_N(t))^{\top}.$$

The semi-discrete system exposed by `semidiscretize` and `rhs!` is

$$\dot{u}_h = \mathcal{L}_h(u_h, t; \theta),$$

where  $\theta$  denotes the recorded physical, geometry, grid, and solver parameters. Componentwise,

$$\begin{aligned} \dot{a}_i &= -\frac{\widehat{F}_{i+1/2}^a - \widehat{F}_{i-1/2}^a}{\Delta z}, \\ \dot{Q}_i &= -\frac{\widehat{F}_{i+1/2}^Q - \widehat{F}_{i-1/2}^Q}{\Delta z} + \widehat{S}_i. \end{aligned}$$

All divisions by  $a$  use the positivity-regularized value of the radius-squared area coordinate.

With  $K = Eh/(1 - \sigma^2)$ , velocity-profile momentum factor  $\alpha_{\mathcal{P}}$ , and  $\alpha_c(R'_0) = -2(R'_0)^2/35$ , define  $\iota_{\mathcal{M}} = 1$  for the `canic-extended-1d` forward-model descriptor and  $\iota_{\mathcal{M}} = 0$  for `classical-1d-no-slip`. The semi-discrete full-state flux is

$$\mathbf{F}(a, Q, z) = \left( Q, (\alpha_{\mathcal{P}} + \iota_{\mathcal{M}} \alpha_c(R'_0(z))) \frac{Q^2}{a} + \frac{K}{3\rho R_{\text{max}}^2} a^{3/2} \right)^{\top}.$$

At each interface,

$$\widehat{\mathbf{F}}_{i+1/2} = \frac{1}{2} \left[ \mathbf{F}(\mathbf{U}_{i+1/2}^-, z_{i+1/2}) + \mathbf{F}(\mathbf{U}_{i+1/2}^+, z_{i+1/2}) \right] - \frac{1}{2} s_{i+1/2} \left( \mathbf{U}_{i+1/2}^+ - \mathbf{U}_{i+1/2}^- \right),$$

where  $\mathbf{U} = (a, Q)^\top$  and the finite-volume realization uses neighboring first-order states plus ghost boundary states. The local numerical speed is

$$s_{i+1/2} = \max \left\{ s_h(\mathbf{U}_{i+1/2}^-, z_{i+1/2}), s_h(\mathbf{U}_{i+1/2}^+, z_{i+1/2}) \right\},$$

with

$$\begin{aligned} s_h(a, Q, z) &= \max \{ |\alpha_{\text{eff}} u - \chi|, |\alpha_{\text{eff}} u + \chi| \}, \\ \alpha_{\text{eff}} &= \alpha_{\mathcal{P}} + \iota_{\mathcal{M}} \alpha_c(R'_0(z)), \quad u = \frac{Q}{a}, \\ \chi^2 &= (\alpha_{\text{eff}} u)^2 - \alpha_{\text{eff}} u^2 + \frac{K}{2\rho R_{\text{max}}^2} \sqrt{a}. \end{aligned}$$

The source term uses the specified centered interior and one-sided boundary difference  $D_z^h$  on the cell averages.

Let  $g_{\mathcal{P}}$  denote the profile shear factor,

$$\dot{\gamma}_{1D,i} = g_{\mathcal{P}} \frac{|Q_i|}{a_i \sqrt{a_i}}, \quad \nu_{\text{eff},i}^{\mathcal{R}} = \frac{\eta_{\text{eff}}^{\mathcal{R}}(\dot{\gamma}_{1D,i})}{\rho},$$

and  $\alpha'_c(z) = -4R'_0(z)R''_0(z)/35$ . The implemented source is

$$\begin{aligned} \widehat{S}_i &= -2\nu_{\text{eff},i}^{\mathcal{R}} g_{\mathcal{P}} \frac{Q_i}{a_i} + \frac{K}{\rho R_{\text{max}}^2} a_i R'_0(z_i) - a_i \widehat{\partial_z p_{2i}} + \iota_{\mathcal{M}} \frac{Q_i^2}{a_i} \alpha'_c(z_i), \\ \widehat{\partial_z p_{2i}} &= \nu_{\text{eff},i}^{\mathcal{R}} g_{\mathcal{P}} \left[ \frac{Q_i R''_0(z_i)}{a_i R_0(z_i)} - \frac{Q_i (R'_0(z_i))^2}{a_i R_0(z_i)^2} + \frac{(D_z^h Q)_i R'_0(z_i)}{a_i R_0(z_i)} - \frac{Q_i (D_z^h a)_i R'_0(z_i)}{a_i^2 R_0(z_i)} \right]. \end{aligned}$$

For the **newtonian** descriptor, this reduces to the constant value  $\nu_{\text{eff},i}^{\mathcal{R}} = \nu$ . For the non-Newtonian closures, the effective viscosity is evaluated with the shear-rate regularization and any declared interval projection before division by density. For the power-family profile,  $g_{\mathcal{P}} = \gamma + 2 = \alpha_{\mathcal{P}}/(\alpha_{\mathcal{P}} - 1)$ . The flat profile is not evaluated through that singular limit; it is assigned  $\alpha_{\mathcal{P}} = 1$  and an explicit finite  $g_{\mathcal{P}}$ .

### G.3 Time-integration realization

The native time integrator advances the semi-discrete operator with the declared third-order strong-stability-preserving Runge–Kutta map

$$u_h^{n+1} = \Phi_{\Delta t_n}^{\text{SSPRK3}}(u_h^n; \mathcal{L}_h).$$

In expanded form, using  $\Pi$  for the recorded positive-area projection on the  $a$ -components,

$$\begin{aligned} u^{(1)} &= \Pi(u^n + \Delta t_n \mathcal{L}_h(u^n, t^n)), \\ u^{(2)} &= \Pi\left(\frac{3}{4}u^n + \frac{1}{4}\left[u^{(1)} + \Delta t_n \mathcal{L}_h(u^{(1)}, t^n + \Delta t_n)\right]\right), \\ u^{n+1} &= \Pi\left(\frac{1}{3}u^n + \frac{2}{3}\left[u^{(2)} + \Delta t_n \mathcal{L}_h(u^{(2)}, t^n + \Delta t_n)\right]\right). \end{aligned}$$

The native step size is

$$\Delta t_n = \min\left\{\Delta t_{\max}, \frac{\text{CFL} \Delta z}{\max_i s_h(a_i^n, Q_i^n, z_i)}, T_{\text{final}} - t^n\right\}.$$

The SciML realization constructs an `ODEProblem` for the same  $\dot{u}_h = \mathcal{L}_h(u_h, t; \theta)$  and applies the selected `OrdinaryDiffEq` policy recorded in the solve specification. Thus comparisons between these realizations change the time integrator, not the semi-discrete spatial operator.

## G.4 Boundary-state realization

The finite-volume boundary realization imposes one incoming boundary condition at each boundary in the subcritical regime using a Riemann-invariant construction. Let

$$c_0 = \left(\frac{K}{2\rho R_{\max}^2}\right)^{1/2}.$$

At the inlet, the incoming flow is  $Q_{\text{in}} = R_0(0)^2 \bar{u}_{\text{in}}$ . The outgoing invariant from the first interior cell is

$$w_- = \frac{Q_1}{a_1} - 4c_0 a_1^{1/4},$$

and the ghost coordinate  $a_{\text{in}}$  solves

$$\frac{Q_{\text{in}}}{a_{\text{in}}} - 4c_0 a_{\text{in}}^{1/4} = w_-.$$

At the outlet, the radius-squared coordinate is fixed to  $a_{\text{out}} = R_0(L)^2$ . The outgoing invariant from the last interior cell is

$$w_+ = \frac{Q_N}{a_N} + 4c_0 a_N^{1/4},$$

and the ghost flow is

$$Q_{\text{out}} = a_{\text{out}} w_+ - 4c_0 a_{\text{out}}^{5/4}.$$

The boundary update therefore constrains the incoming information and leaves the outgoing information tied to the interior state. Boundary-quality plots and reflected-wave sidecars are diagnostics until explicit thresholds are admitted.

## G.5 Residual diagnostics

Stored residuals are post-processing diagnostics on sampled fields, not proof of the continuous PDE residual. The symbols  $D_t$  and  $D_z$  in this subsection denote the recorded temporal and spatial finite-difference operators on the saved grid, not weak derivatives. For a stored field sequence, the semi-discrete defect is read as

$$\mathcal{E}_h^n = D_t u_h^n - \mathcal{L}_h(u_h^n, t^n; \theta).$$

Componentwise, this gives

$$\mathcal{E}_i^a(t^n) = D_t a_i^n - \mathcal{L}_{h,i}^a(u_h^n, t^n; \theta), \quad \mathcal{E}_i^Q(t^n) = D_t Q_i^n - \mathcal{L}_{h,i}^Q(u_h^n, t^n; \theta).$$

The E1 diagnostic summary reports these residuals on reviewed interior cells with recorded finite-field, positivity, CFL, and pressure-drop sign checks. The numbers support the dataset contract and local consistency reading; they do not establish a convergence theorem or external parity. Any residual norm or error norm reported from these arrays is a sampled norm tied to the numerical record, rather than an unqualified continuum  $L^p(K)$  norm.

## H Code Availability and Build Statement

This report is built from the  $\text{\LaTeX}$  sources rooted at `final-report.tex`. The compiled PDF should be treated as the rendered form of those sources. The report package used for this build is the repository root containing `final-report.tex`. Because no public remote or archival release is declared here, this appendix does not claim a public repository or archival URL.

The Julia simulation code is packaged as `CanicExtended1D` in the root Julia project. The tracked source inventory is:

| Tracked source                                                                                                | Role in the report package                                                                                                                                                                                                                                                              |
|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>Project.toml</code> , <code>Manifest.toml</code>                                                        | Julia package identity, dependency declarations, compatibility bounds, and resolved dependency versions.                                                                                                                                                                                |
| <code>src/CanicExtended1D.jl</code>                                                                           | Package entry point and public export surface for the solver, studies, resolved-3D comparison, and report figure export helpers.                                                                                                                                                        |
| <code>src/CanicExtended1D/*.jl</code>                                                                         | Solver components: model descriptors, geometry, state layout, finite-volume and DG operators, native and SciML backends, Stokes initial condition, OpenBF-style adapter, studies, refinement, resolved-3D diagnostics, output writers, package benchmarks, and geometry-export helpers. |
| <code>simulations/run_canic_extended_1d.jl</code> ,<br><code>simulations/canic_extended_1d_stenosis.jl</code> | Thin command-line wrappers around <code>CanicExtended1D.run_cli</code> .                                                                                                                                                                                                                |
| <code>simulations/run_package_benchmark.jl</code>                                                             | Thin command-line wrapper around <code>CanicExtended1D.run_package_benchmark</code> ; writes the benchmark manifest and CSV schemas used in Section 2.1.                                                                                                                                |
| <code>simulations/export_stenosis_geometry_figures.jl</code>                                                  | Thin wrapper around <code>CanicExtended1D.export_stenosis_geometry_figures</code> .                                                                                                                                                                                                     |
| <code>python/src/research_hemodynamics/*.py</code>                                                            | Python Typer CLI and native/Torch/SciPy/SciML adapter surface used for descriptor smoke runs and CPU/Torch-MPS comparison rows.                                                                                                                                                         |
| <code>scripts/render_package_benchmark_figures.py</code>                                                      | Python renderer for package-benchmark CSVs, report figures, and compact $\text{\LaTeX}$ table fragments.                                                                                                                                                                                |
| <code>test/runtests.jl</code> , <code>test/test/*.jl</code>                                                   | Julia test orchestrator and feature-specific regression tests for model closures, backends, comparison diagnostics, CLI parsing, studies, benchmarks, and exports.                                                                                                                      |
| <code>scripts/julia-release</code>                                                                            | Repository launcher that selects Julia 1.12 or newer and binds the root project environment.                                                                                                                                                                                            |

The standard package import surface used by report regeneration commands is:

```
1 using CanicExtended1D
2
3 run_available_resolved3d_comparison(
4     output_dir="simulations/output/3d_comparison/full_t1_native_nx400",
5     overwrite=true,
6 )
```

The package-benchmark suite is regenerated separately from the tracked PDF. A smoke run writes deterministic schema checks; an overnight run expands the same schemas to the full benchmark matrix:

```
./scripts/julia-release simulations/run_package_benchmark.jl \
--profile smoke \
--output-dir simulations/output/package_benchmark/<run_id> \
--overwrite \
--include-python \
--publish-report-assets

pipenv run python scripts/render_package_benchmark_figures.py \
--benchmark-dir simulations/output/package_benchmark/<run_id>
```

The tracked package-benchmark assets used in Section 2.1 are copied under `figures/static/static/data/package-benchmark/` and rendered under `figures/static/static/rendered/`. The tracked manifest records an overnight profile generated at 2026-06-18T06:27:28Z. Its source output directory was the `overnight-python-maturity-20260617-225946/` benchmark run; Python stages and resolved-3D stages were enabled, and the completed run was copied into the tracked report assets. The recorded runtime context was Julia 1.12.6, Python 3.13.12, Torch 2.12.0, MPS available, SciPy unavailable, and generation commit 2c8712b89a61b3949278986d20496d609b96612d. The published benchmark CSVs contain 252 status rows across the eight report stages, all marked ok; this is an internal status summary, not an external validation claim.

The tracked package-benchmark data and table fragment have the following SHA-256 hashes:

| Tracked package-benchmark file                                                   | SHA-256                                                              |
|----------------------------------------------------------------------------------|----------------------------------------------------------------------|
| figures/static/static/data/package-benchmark/manifest.json                       | 2b21c735e1ec4cacff7be33160a7cd74<br>3e03235fd93b0440ed4b4c9410ac203b |
| figures/static/static/data/package-benchmark/case_results.csv                    | f05d60c1c7a07680a02cf1e34a1f7d59<br>68c133bd1d291ab9c0ac556d6273df83 |
| figures/static/static/data/package-benchmark/refinement.csv                      | e07ba7b450e0578e5b702d8b27202001<br>5e325e9333e1e62a97ae696aa0e104e7 |
| figures/static/static/data/package-benchmark/backend_parity.<br>csv              | b9c35a321c7c0deda8eea0ccb0bb33fe<br>a854b68b04e88fdb768ee9a610492432 |
| figures/static/static/data/package-benchmark/stokes_ic.csv                       | 3dd98156ba04f28dd62f2423bd17d936<br>bc7c3fad390346c5c37db3c942f1d2f2 |
| figures/static/static/data/package-benchmark/rheology_<br>profile.csv            | 3e8086215a9081f6a66d9a049825f20f<br>431ecb2a860b2819ae72d1db4e25da7b |
| figures/static/static/data/package-benchmark/boundary_openbf.<br>csv             | 5472f0db7eed87051cb3ea55328b119c<br>acdcd896a4f8d6618ac7a6f344fdbc88 |
| figures/static/static/data/package-benchmark/resolved3d.csv                      | 5470d1277976c5cb99e1cd1f2c7c9f35<br>ccd011f8d7ac03fbc3931a81cad903fe |
| figures/static/static/data/package-benchmark/python_mps.csv                      | 3a5e040e98422df8b767dcca4e758bb7<br>e8604f7f805c946670a42a23c316baa4 |
| figures/static/static/tables/package-benchmark/<br>package-benchmark-summary.tex | 9649ee00c26921196d628a2c9f17f7d8<br>14e4390ad194da8f399482aafa617948 |

The tracked package-benchmark rendered figures used by the PDF have the following SHA-256 hashes:

| Tracked rendered file                                                 | SHA-256                                                              |
|-----------------------------------------------------------------------|----------------------------------------------------------------------|
| figures/static/static/rendered/package-benchmark-convergence.pdf      | e8f72fa7a18f4a6ade0a74c46d468e2<br>1543e95f97236dc2a70e18ef5a07e0f19 |
| figures/static/static/rendered/package-benchmark-backend-parity.pdf   | 648c4a6e2e4e8550a07969dd7e056fdc<br>80822a7202a7e7670e6e4d3045227aa2 |
| figures/static/static/rendered/package-benchmark-rheology-profile.pdf | f68298da550b0ad257a52a04c08ac1db<br>4b0f630056988c3817dcc45b327451ec |
| figures/static/static/rendered/package-benchmark-resolved3d.pdf       | 68d0a7df387d859ef3ae9060d6b5f235<br>40346f49e3585b8f34a677409aca52cd |
| figures/static/static/rendered/package-benchmark-python-mps.pdf       | 3f65f0758da7a99f51a03bb57613b5cb<br>ad10d1c5b9a2a9940ca600229865bf76 |

The Section 2 comparison artifact is the non-archived directory `simulations/output/3d_comparison/full_t1_native_nx400/`. The command shape for regenerating the comparison, when the raw 3D inputs are restored, is:

```
./scripts/julia-release -e 'using CanicExtended1D; run_available_resolved3d_comparison(
    output_dir="simulations/output/3d_comparison/full_t1_native_nx400", overwrite=true)'
```

The raw upstream XDMF/HDF5 inputs used for Figure 5 and Section 2 were restored locally from <https://github.com/qcutexu/Extended-1D-AQ-system>, commit 056a9da2b36b480691f18025d242d2c00f6e7180, under `case3_all_3d_results/`. The local copies under `simulations/data/3d/canic_case3/` are ignored by git and are not archived in this report package. Rerunning the raw XDMF/HDF5 extraction therefore requires those local inputs or the upstream repository. The observed local raw velocity-input hashes are:

| Ignored local input                              | SHA-256                                                              |
|--------------------------------------------------|----------------------------------------------------------------------|
| simulations/data/3d/canic_case3/77/velocity.xdmf | 8cbb61e8d6a8b9fbfe9662bea7544eb8<br>9ef58390cdcc93a5d0f68fbb19c110b7 |
| simulations/data/3d/canic_case3/77/velocity.h5   | 315157b3c9a9a92d1e99b26c3e9c393f<br>22303a676b3b24f52287d0b8cd22d168 |
| simulations/data/3d/canic_case3/60/velocity.xdmf | 765adb3f603b2306144dfb9be6ffec5573<br>23686867172ea9cc7b6e3f246284e0 |
| simulations/data/3d/canic_case3/60/velocity.h5   | 1dee423991e35ced10a051e20b0598ee<br>0cbea3d59521b0fc3cb490b49bb4fe41 |

The tracked static data copied into the PDF has the following SHA-256 hashes:

| Tracked file                                                                          | SHA-256                                                               |
|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| figures/static/static/data/stenosis-comparison/section-mean.dat                       | 5939c015eaa848dbd62e0531b26799a3<br>297eb3ebb7c936fd6ce66e9f4b8e649e  |
| figures/static/static/data/stenosis-comparison/radial-case77.dat                      | 90d4766201f5610efdd41d93f0717a6c0<br>4485a00f4f60a272ba46207c7065f8a  |
| figures/static/static/data/stenosis-comparison/radial-case60.dat                      | e35b4f1e9016e22ba1ee9feb638945273<br>2eb81fb0ea7a9d4a686f64d89e1bbbc  |
| figures/static/static/data/stenosis-geometry/resolved_velocity_nodes_manifest.csv     | 372796413873c09581ced890f8de657e<br>f39e9ff69eabca8ce46b51b0cf758d3f  |
| figures/static/static/data/stenosis-geometry/resolved_velocity_nodes_case77_sev23.csv | 0c0451dcee29216d967cecb11d36f518<br>a95c469fbcf18a1b472d7b9f01d211d0  |
| figures/static/static/data/stenosis-geometry/resolved_velocity_nodes_case60_sev40.csv | eb4b2d5149128740bfb89ff219e92a47<br>d0535f3a7fd45078732b837619f68d1   |
| figures/static/static/data/stenosis-geometry/resolved_envelope_manifest.csv           | d8236b5549851ff97eb9d9628b2bfbcb6<br>60f0e594738b634509d0538476ef25a7 |
| figures/static/static/data/stenosis-geometry/resolved_envelope_case77_sev23.csv       | 7ffbbdbf52e4cab5c27e7aebc54bc47d<br>8aa0e7e2ab2b7058c61da8f06bb40192  |
| figures/static/static/data/stenosis-geometry/resolved_envelope_case60_sev40.csv       | e661114841a0b3f8abccb0dc244e2d4<br>b4409291c8f02dcd5a4da2398892a7c1d  |
| figures/static/static/rendered/resolved-3d-flow-field.pdf                             | 2dce4168706d16a862dc637397e9be0e<br>2b9c062ddb7b8807d57d4a3ae50178d   |

The non-archived comparison artifact observed for this build contains the following output hashes; these files are provenance evidence, not tracked archive contents:

| Generated artifact file         | SHA-256                                                              |
|---------------------------------|----------------------------------------------------------------------|
| comparison_summary.csv          | 8dbb4eb5f6e9fa369fala4bf215ff2c3<br>80b788d2b9b89f828718ae1485e79b6b |
| section_mean_case77_sev23.csv   | 4efafa3c314eaa19193f3c884c9b9607<br>9423a2bf2985cde4cc6511f0dfaf9348 |
| section_mean_case60_sev40.csv   | 48a6af7ef5f50bdadfcf7b043d7632acc<br>fc73af41750e93f02e701c16fb948b4 |
| radial_profile_case77_sev23.csv | 29bb3e13fa34396c27c91d0183bcac1<br>16516bedcc5b92be33cb832126216890d |
| radial_profile_case60_sev40.csv | 994091f5e74d39249d8d7b9ec374d07<br>b36eec9fdef72050bc712f5615443458c |
| section_mean_overlay.svg        | c6ac9de7f3cc92782c61753c346e66e<br>405fc6f3ab22d45e435c7afa5d41aa322 |
| radial_profile_case77_sev23.svg | fb60c63ef2963c6f13f8e28c6d0b306<br>485326318e32f83d12c4f296652834c63 |
| radial_profile_case60_sev40.svg | e8a3794c1e07d3ea58ffeb59be3c0558<br>e9009473cf3fb304a8b74aa1250f7bf7 |

## References

- [1] T. Köppl and R. Helmig. *Dimension Reduced Modeling of Blood Flow in Large Arteries. An Introduction for Master Students and First Year Doctoral Students*. Mathematical Engineering. Springer Cham, 2023. DOI: 10.1007/978-3-031-33087-2.
- [2] G. P. Galdi, A. M. Robertson, R. Rannacher, and S. Turek. *Hemodynamical Flows: Modeling, Analysis and Simulation*. Birkhäuser Basel, 2008. DOI: 10.1007/978-3-7643-7806-6.
- [3] A. R. Pries, D. Neuhaus, and P. Gaetgens. “Blood viscosity in tube flow: dependence on diameter and hematocrit”. In: *American Journal of Physiology-Heart and Circulatory Physiology* 263.6 (1992), H1770–H1778. DOI: 10.1152/ajpheart.1992.263.6.H1770.
- [4] G. Teschl. *Ordinary Differential Equations and Dynamical Systems*. Vol. 140. Graduate Studies in Mathematics. American Mathematical Society, 2012. DOI: 10.1090/gsm/140.
- [5] N. Kumar, A. Khader, R. Pai, P. A. Kyriacou, S. Khan, and P. Koteshwara. “Computational Fluid Dynamic Study on Effect of Carreau-Yasuda and Newtonian Blood Viscosity Models on Hemodynamic Parameters”. In: *Journal of Computational Methods in Sciences and Engineering* 19.2 (2019), pp. 465–477. DOI: 10.3233/JCM-181004.
- [6] H. Liu, L. Lan, J. Abrigo, H. L. Ip, Y. Soo, D. Zheng, K. S. Wong, D. Wang, L. Shi, T. W. Leung, and X. Leng. “Comparison of Newtonian and Non-Newtonian Fluid Models in Blood Flow Simulation in Patients With Intracranial Arterial Stenosis”. In: *Frontiers in Physiology* 12 (2021), p. 718540. DOI: 10.3389/fphys.2021.718540.
- [7] A. Quarteroni and L. Formaggia. “Mathematical Modelling and Numerical Simulation of the Cardiovascular System”. In: *Handbook of Numerical Analysis*. Vol. 12. Used as broad cardiovascular-modeling background. Elsevier, 2004, pp. 3–127. DOI: 10.1016/S1570-8659(03)12001-7.
- [8] Clay Mathematics Institute. *Navier–Stokes Equation*. Millennium Prize problem overview; modified 24 May 2023. Clay Mathematics Institute. May 27, 2022. URL: <https://www.claymath.org/millennium/navier-stokes-equation/> (visited on 05/12/2026).
- [9] L. Formaggia, D. Lamponi, and A. Quarteroni. “One-Dimensional Models for Blood Flow in Arteries”. In: *Journal of Engineering Mathematics* 47.3–4 (2003), pp. 251–276. DOI: 10.1023/B:ENGI.0000007980.01347.29.
- [10] Y. Shi, P. Lawford, and R. Hose. “Review of Zero-D and 1-D Models of Blood Flow in the Cardiovascular System”. In: *BioMedical Engineering OnLine* 10.1 (2011), p. 33. DOI: 10.1186/1475-925X-10-33.
- [11] A. Quarteroni and A. Veneziani. “Analysis of a Geometrical Multiscale Model Based on the Coupling of ODEs and PDEs for Blood Flow Simulations”. In: *Multiscale Modeling & Simulation* 1.2 (2003), pp. 173–195. DOI: 10.1137/S1540345902408482.

- [12] L. Formaggia, A. Moura, and F. Nobile. “On the Stability of the Coupling of 3D and 1D Fluid-Structure Interaction Models for Blood Flow Simulations”. In: *ESAIM: Mathematical Modelling and Numerical Analysis* 41.4 (2007), pp. 743–769. DOI: 10.1051/m2an:2007039.
- [13] S. Canic, S. Guo, Y. Wang, X. Yue, and H. Zheng. “Extended one-dimensional reduced model for blood flow within a stenotic artery”. In: *arXiv preprint arXiv:2409.16262* (2024). arXiv:2409.16262v1. DOI: 10.48550/arXiv.2409.16262. URL: <https://arxiv.org/abs/2409.16262>.
- [14] R. J. LeVeque. *Finite Volume Methods for Hyperbolic Problems*. Cambridge University Press, 2002. DOI: 10.1017/CB09780511791253.
- [15] E. Boileau, P. Nithiarasu, P. J. Blanco, L. O. Muller, F. E. Fossan, L. R. Hellevik, W. P. Donders, W. Huberts, M. Willemet, and J. Alastruey. “A Benchmark Study of Numerical Schemes for One-Dimensional Arterial Blood Flow Modelling”. In: *International Journal for Numerical Methods in Biomedical Engineering* 31.10 (2015), e02732. DOI: 10.1002/cnm.2732.
- [16] L. John, P. Pustějovská, and O. Steinbach. “On the influence of the wall shear stress vector form on hemodynamic indicators”. In: *Computing and Visualization in Science* 18.4–5 (2017), pp. 113–122. DOI: 10.1007/s00791-017-0277-7.
- [17] F. Derimay, G. Finet, and G. Rioufol. “Coronary Artery Stenosis Prediction Does Not Mean Coronary Artery Stenosis Obstruction”. In: *European Heart Journal* 42.42 (2021), p. 4401. DOI: 10.1093/eurheartj/ehab332.
- [18] J. Escaned and J. Davies, eds. *Physiological Assessment of Coronary Stenoses and the Microcirculation*. Springer London, 2017. DOI: 10.1007/978-1-4471-5245-3.
- [19] K. Shaikh, P. R. Lozano, S. Evangelou, E.-H. Wu, N. S. Nurmohamed, N. Madan, D. Verghese, C. Shekar, A. Waheed, S. Siddiqui, M. R. Kolossváry, S. Almeida, T. Coombes, D. Suchá, S. J. Trivedi, and A. R. Ithdayhid. “CT derived fractional flow reserve: Part 1 – Comprehensive review of methodologies”. In: *Journal of Cardiovascular Computed Tomography* 19.4 (2025). SCCT FiRST (Fellow and Resident Leaders of SCCT) Committee, pp. 390–396. DOI: 10.1016/j.jcct.2025.07.001.
- [20] I. J. van den Hoogen, J. Schultz, J. H. Kuneman, M. A. de Graaf, V. Kamperidis, A. Broersen, J. W. Jukema, A. Sakellarios, S. Nikopoulos, S. Kyriakidis, K. K. Naka, L. Michalis, D. I. Fotiadis, T. Maaniitty, A. Saraste, J. J. Bax, and J. Knuuti. “Detailed Behaviour of Endothelial Wall Shear Stress Across Coronary Lesions From Non-Invasive Imaging With Coronary Computed Tomography Angiography”. In: *European Heart Journal - Cardiovascular Imaging* 23.12 (2022), pp. 1708–1716. DOI: 10.1093/ehjci/jeac095.
- [21] N. H. Pijls, B. De Bruyne, K. Peels, P. H. Van Der Voort, H. J. Bonnier, J. Bartunek, and J. J. Koolen. “Measurement of fractional flow reserve to assess the functional severity of coronary-artery stenoses”. In: *The New England Journal of Medicine* 334.26 (1996), pp. 1703–1708. DOI: 10.1056/NEJM199606273342604.

- [22] P. A. L. Tonino, W. F. Fearon, B. De Bruyne, K. G. Oldroyd, M. A. Leeser, P. N. Ver Lee, P. A. Maccarthy, M. Van't Veer, and N. H. J. Pijls. "Angiographic versus functional severity of coronary artery stenoses in the FAME study fractional flow reserve versus angiography in multivessel evaluation". In: *Journal of the American College of Cardiology* 55.25 (2010), pp. 2816–2821. DOI: 10.1016/j.jacc.2009.11.096.
- [23] B. L. Nørgaard, J. Leipsic, S. Gaur, S. Seneviratne, B. S. Ko, H. Ito, J. M. Jensen, L. Mauri, B. De Bruyne, H. Bezerra, K. Osawa, M. Marwan, C. Naber, A. Erglis, S.-J. Park, E. H. Christiansen, A. Kaltoft, J. F. Lassen, H. E. Bøtker, S. Achenbach, and NXT Trial Study Group. "Diagnostic performance of noninvasive fractional flow reserve derived from coronary computed tomography angiography in suspected coronary artery disease: the NXT trial". In: *Journal of the American College of Cardiology* 63.12 (2014), pp. 1145–1155. DOI: 10.1016/j.jacc.2013.11.043.