CAUTION: If new caliper bolts are being installed, or if the original reason for repair was a drag/pull condition, check caliper bolt length before proceeding. Bolts must not have a shank length greater than 67.6 mm (2.66 in.) (Fig. 25).

CORRECT SHANK LENGTH:

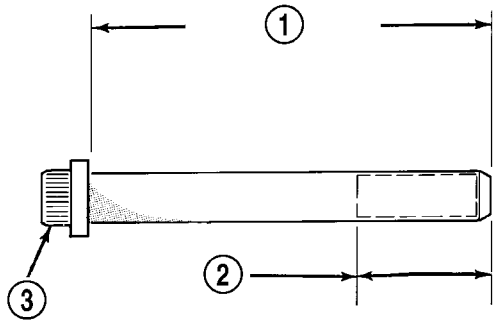

J9405-154

Fig. 25 Mounting Bolt Dimensions

1 - 67 mm (± 0.6 mm) 2.637 in. (± 0.0236 in.)
2 - 22 mm (0.866 in.) THREAD LENGTH
3 - CALIPER BOLT

(4) Install brake hose to caliper with **new seal washers** and tighten fitting bolt to 31 N·m (23 ft. lbs.).

CAUTION: Verify brake hose is not twisted or kinked before tightening fitting bolt.

(5) Bleed base brake system. (Refer to 5 - BRAKES - STANDARD PROCEDURE).

(6) Install wheel and tire assemblies. (Refer to 22 - TIRES/WHEELS/WHEELS - STANDARD PROCEDURE).

(7) Remove supports and lower vehicle.

(8) Verify firm pedal before moving vehicle.

INSTALLATION - REAR

(1) Install the brake pads if removed.

(2) Lubricate ant-rattle clips for the disc brake pads (Fig. 26).

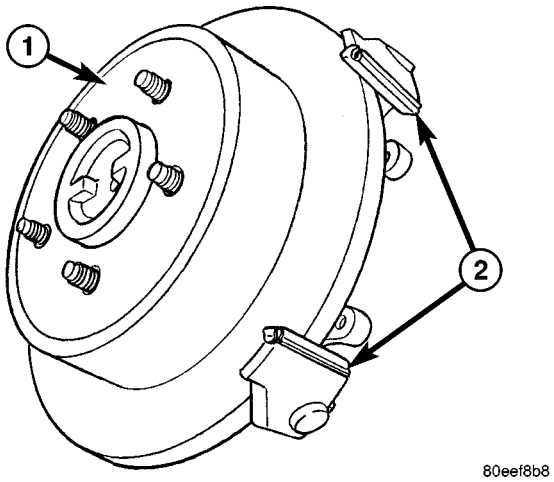

80eef8b8

Fig. 26 ANTI-RATTLE CLIPS

1 - ROTOR
2 - ANTI-RATTLE CLIPS

(3) Install caliper to the caliper adapter.

(4) Coat the caliper mounting slide pin bolts with silicone grease. Then install and tighten the bolts to 15 N·m (11 ft. lbs.).

(5) Install the brake hose banjo bolt if removed (Fig. 27).

(6) Install the brake hose to the caliper with **new seal washers** and tighten fitting bolt to 31 N·m (23 ft. lbs.).

CAUTION: Verify brake hose is not twisted or kinked before tightening fitting bolt.

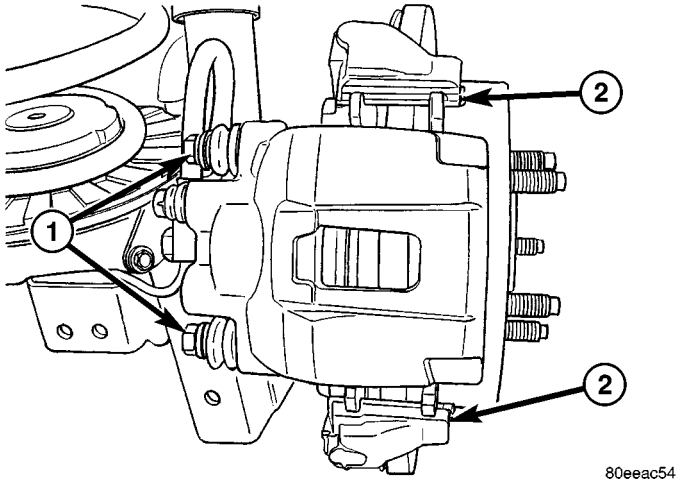

80eeac54

Fig. 27 CALIPER INSTALLED

1 - CALIPER MOUNTING BOLTS
2 - CALIPER SLIDES

(7) Remove the prop rod from the vehicle.

(8) Bleed the base brake system, (Refer to 5 - BRAKES - STANDARD PROCEDURE) OR (Refer to 5 - BRAKES - STANDARD PROCEDURE).

(9) Install the wheel and tire assemblies (Refer to 22 - TIRES/WHEELS/WHEELS - STANDARD PROCEDURE).