of the wiper element flexor oriented towards the end of the wiper arm that is nearest to the wiper pivot.

(3) Insert the hook formation on the tip of the wiper arm through the opening in the wiper blade superstructure ahead of the wiper blade pivot block/ latch unit far enough to engage the pivot block into the hook (Fig. 16).

(4) Slide the wiper blade pivot block/latch up into the hook formation on the tip of the wiper arm until the latch release tab snaps into its locked position. Latch engagement will be accompanied by an audible click.

(5) Gently lower the wiper blade onto the glass.

FRONT WIPER MODULE

DESCRIPTION

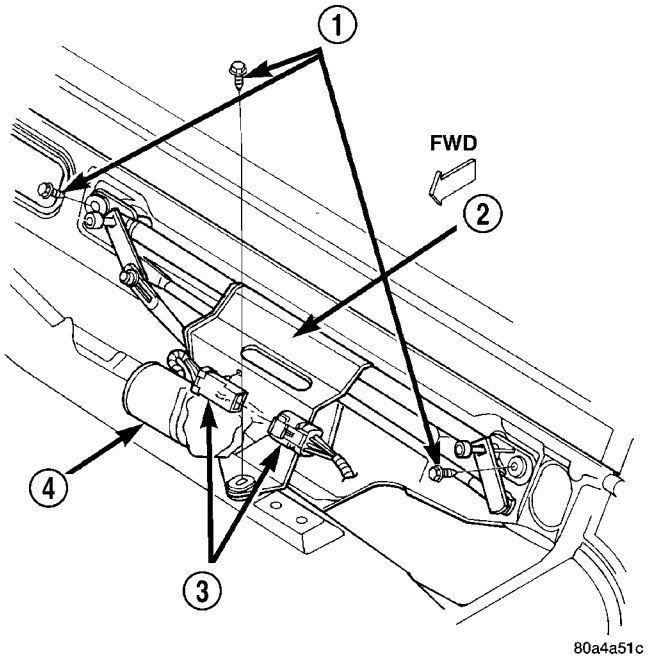

Fig. 17 Front Wiper Module

1 - SCREW (3)
2 - MODULE BRACKET
3 - WIRE HARNESS CONNECTOR
4 - WIPER MOTOR

The front wiper module is secured with three screws, one each at the motor bracket and the two pivot brackets through rubber insulators to the cowl top panel and concealed within the cowl plenum area beneath the cowl plenum cover/grille panel (Fig. 17). The driver ends of the wiper pivot shafts that protrude through dedicated openings in the cowl plenum cover/grille panel to drive the wiper arms and blades are the only visible components of the front wiper module. The front wiper module consists of the following major components:

- **Bracket** - The front wiper module bracket consists of a long tubular steel main member that has a stamped pivot bracket formation near each end where the two wiper pivots are secured. A stamped steel mounting plate for the wiper motor is secured with welds near the center of the main member. The bracket includes metal-sleeved rubber isolators at each of the three bracket mounting points.
- **Crank Arm** - The front wiper motor crank arm is a stamped steel unit with a slotted hole on the driven end that is secured to the wiper motor output shaft with a nut, and has a ball stud secured to the drive end.
- **Linkage** - The two front wiper linkage members are each constructed of stamped steel. A connecting link with a plastic socket-type bushing in each end is fit over the pivot ball studs to join the two pivots. The wiper drive link has a plastic socket-type bushing on each end. One end of the drive link is snap-fit over a second ball stud on the passenger side pivot crank arm, while the other end is snap-fit over the ball stud on the wiper motor crank arm.
- **Motor** - The front wiper motor is secured with three screws to the motor mounting plate near the center of the wiper module bracket and is protected by a rubber boot. The wiper motor output shaft passes through a hole in the module bracket, where a nut secures the wiper motor crank arm to the motor output shaft. The two-speed permanent magnet wiper motor features an integral transmission, an internal park switch, and an internal automatic resetting circuit breaker.
- **Pivots** - The two front wiper pivots are secured to the ends of the wiper module bracket. A crank arm extends from the lower end of each pivot shaft. The driver side pivot crank arm has a single ball stud secured to it, while the passenger side crank arm has two ball studs. The upper end of each pivot shaft where the wiper arms will be fastened each has an externally serrated drum-like driver secured to it.

The front wiper module for this model is serviced only as a complete unit. If any linkage component or the mounting bracket of the module is faulty or damaged, the entire front wiper module unit must be replaced. The front wiper motor and boot are available for service replacement as a unit only.

OPERATION

The front wiper module operation is controlled by the battery current inputs received by the wiper motor through the right multi-function switch on the steering column. The wiper motor is connected to the vehicle electrical system through a dedicated take out and wire harness connector of the body wire harness. The wiper motor speed is controlled by current flow to either the low speed or the high speed set of brushes. The park switch is a single pole, single throw, momentary switch within the wiper motor that is mechanically actuated by the wiper motor