CONNECTOR

REMOVAL

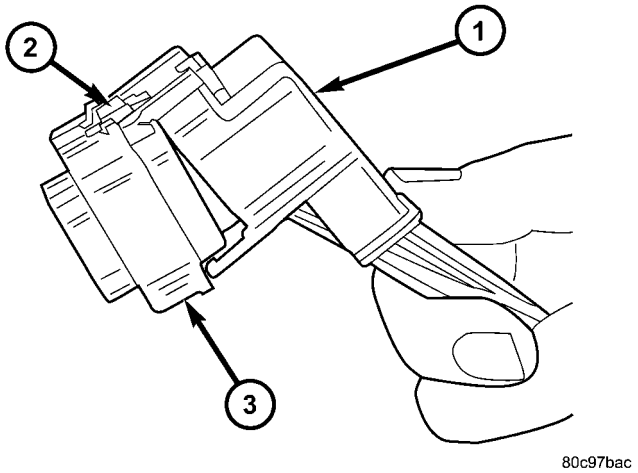

Fig. 9 REMOVAL OF DRESS COVER

1 - DRESS COVER
2 - CONNECTOR LOCK
3 - CONNECTOR

(1) Disconnect battery.
(2) Release Connector Lock (2).
(3) Disconnect the connector (3) being repaired from its mating half/component.
(4) Remove the dress cover (if applicable) (1).