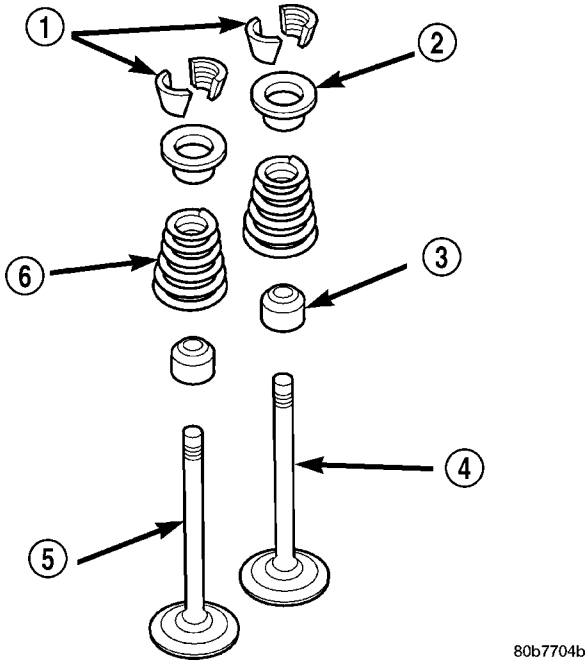

Fig. 27 Valve

1 - VALVE LOCKS (3–BEAD)
2 - RETAINER
3 - VALVE STEM OIL SEAL
4 - INTAKE VALVE
5 - EXHAUST VALVE
6 - VALVE SPRING

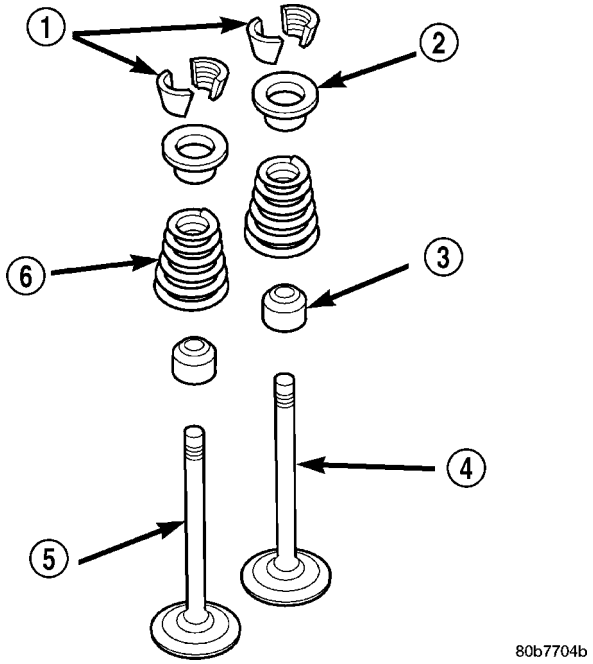

Fig. 28 VALVE AND KEEPER CONFIGURATION 4.0L

1 - VALVE LOCKS (3–BEAD)
2 - RETAINER
3 - VALVE STEM OIL SEAL
4 - INTAKE VALVE
5 - EXHAUST VALVE
6 - VALVE SPRING

VALVE SPRINGS

DESCRIPTION

The valve springs (Fig. 28) are made of high strength silicon chrome spring steel. The springs are common for both intake and exhaust valves.

STANDARD PROCEDURE - VALVE SPRING TENSION TEST

Clean all carbon deposits from the combustion chambers, valve ports, valve stems, valve stem guides and head.

Use a universal Valve Spring Tester and a torque wrench to test each valve spring for the specified tension value (Fig. 29).

Replace valve springs that are not within specifications.

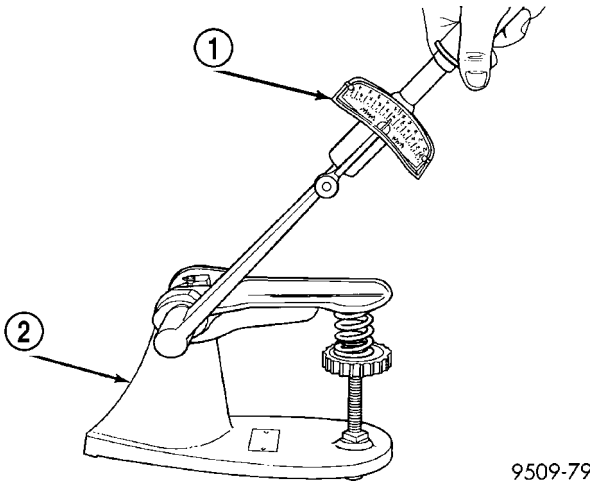

Fig. 29 Valve Spring Tester

1 - TORQUE WRENCH
2 - VALVE SPRING TESTER