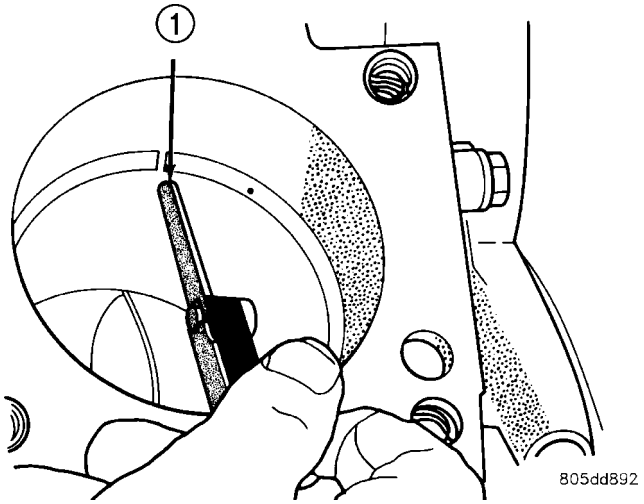

Fig. 67 Gap Measurement

1 - FEELER GAUGE

RING GAP MEASUREMENT CHART

ITEM	SPECIFICATION
Top Compression Ring	0.229 - 0.610 mm (0.0090 - 0.0240 in.)
Second Compression Ring	0.483 - 0.965 mm (0.0190 - 0.080 in.)
Oil Control Ring	0.254 - 1.500 mm (0.010 - 0.060 in.)

(5) The oil control rings are symmetrical, and can be installed with either side up. It is not necessary to use a tool to install the upper and lower rails. Insert oil rail spacer first, then side rails.

(6) The two compression rings are different and cannot be interchanged. The top compression ring can be identified by the shiny coating on the outer sealing surface and can be installed with either side up. (Fig. 68).

(7) The second compression ring has a slight chamfer on the bottom of the inside edge and a dot on the top for correct installation (Fig. 69) and (Fig. 70).

(8) Using a ring installer, install the second compression ring with the dot facing up (Fig. 69) (Fig. 71).

(9) Using a ring installer, install the top compression ring (either side up).

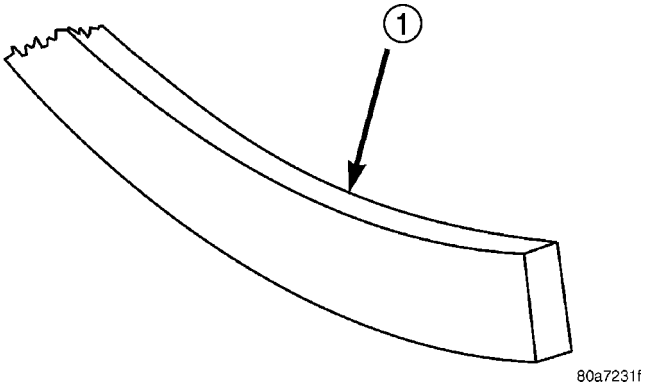

Fig. 68 Top Compression ring identification

1 - TOP COMPRESSION RING

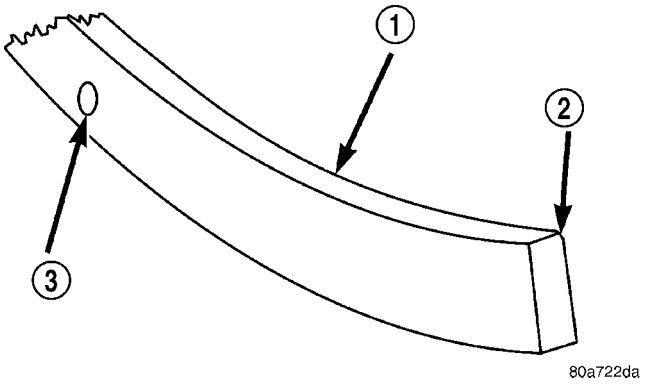

Fig. 69 Second Compression Ring Identification

1 - SECOND COMPRESSION RING
2 - CHAMFER
3 - ONE DOT

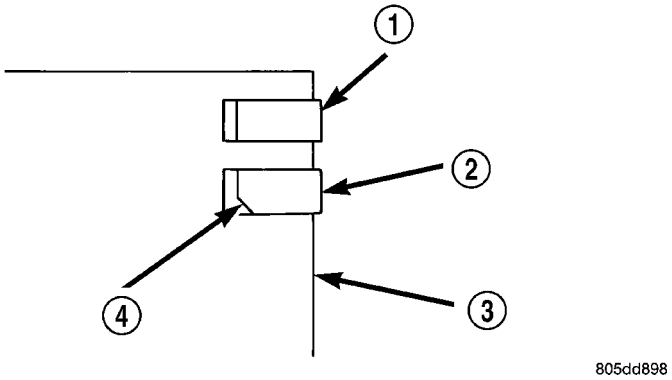

Fig. 70 Compression Ring Chamfer Location

1 - TOP COMPRESSION RING
2 - SECOND COMPRESSION RING
3 - PISTON
4 - CHAMFER