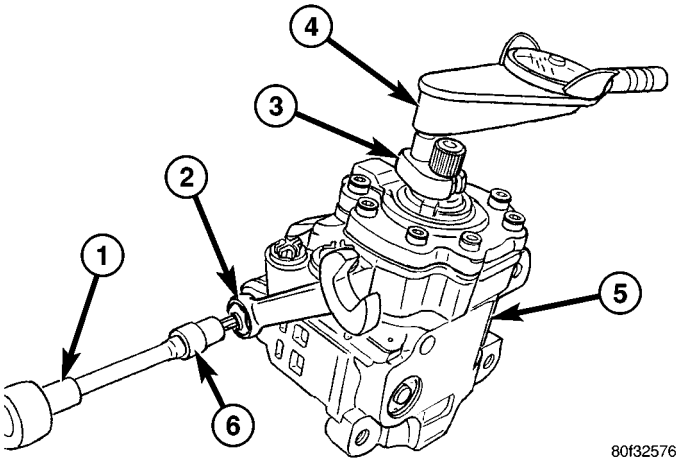

Fig. 7 OVER-CENTER ADJUSTMENT

1 - RATCHET WITH ADAPTER
2 - WRENCH
3 - CROWSFOOT WRENCH
4 - INCH POUND TORQUE WRENCH
5 - STEERING GEAR
6 - ALLEN HEAD SOCKET

DESCRIPTION	SPECIFICATION
Steering Gear Gear Ratio	15:24
Worm Shaft Bearing Preload	0.53–.93 N·m (3.5–8 in. lbs.)
Pitman Shaft Over-Center Drag New Gear (under 400 miles)	.133 N·m (1.17 in. lbs.) + Worm Shaft Preload
Pitman Shaft Over-Center Drag Used Gear (over 400 miles)	.133 N·m (1.17 in. lbs.) + Worm Shaft Preload

SPECIFICATIONS

POWER STEERING GEAR

SPECIFICATIONS

DESCRIPTION	SPECIFICATION
Steering Gear Type	Recirculating Ball

TORQUE CHART

TORQUE SPECIFICATIONS

DESCRIPTION	N·m	Ft. Lbs.	In. Lbs.
Power Steering Gear Adjustment Screw Locknut	65	48	—
Power Steering Gear Gear to Frame Bolts	95	70	—
Power Steering Gear Pitman Shaft Nut	251	185	—
Power Steering Gear Pressure Line	28	21	—
Power Steering Gear Return Line	28	21	—