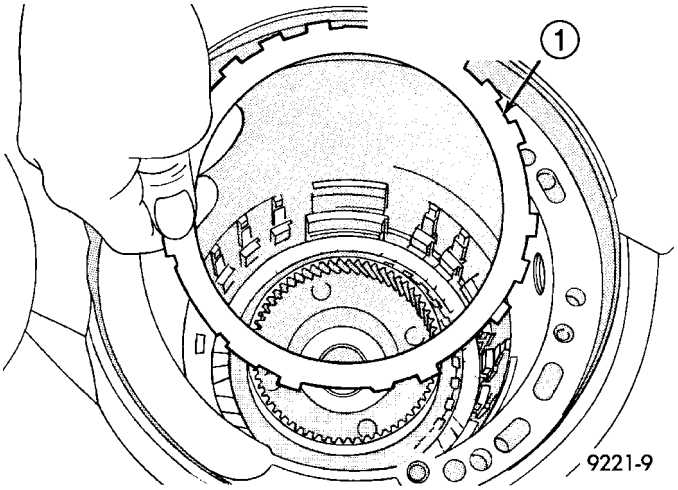


Fig. 102 Install Low/Reverse Reaction Plate

1 - LOW/REVERSE REACTION PLATE (FLAT SIDE UP)

(18) Install a new tapered snap ring (tapered side out) (Fig. 103). Make sure that the snap ring ends are oriented as shown (Fig. 104)

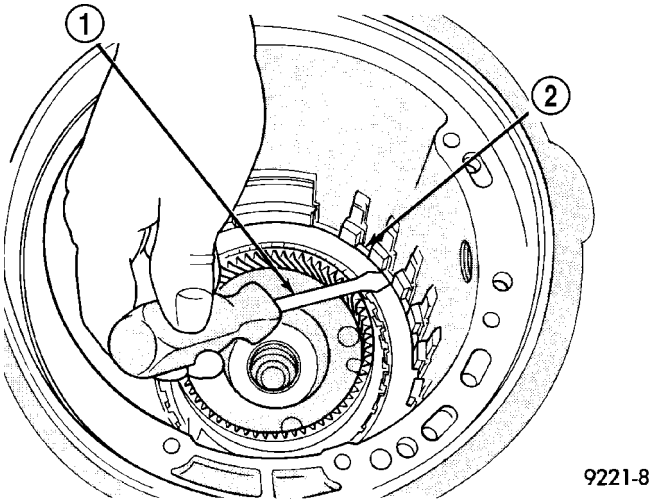


Fig. 103 Snap Ring Installed

1 - SCREWDRIVER
2 - TAPERED SNAP RING (INSTALL AS SHOWN)

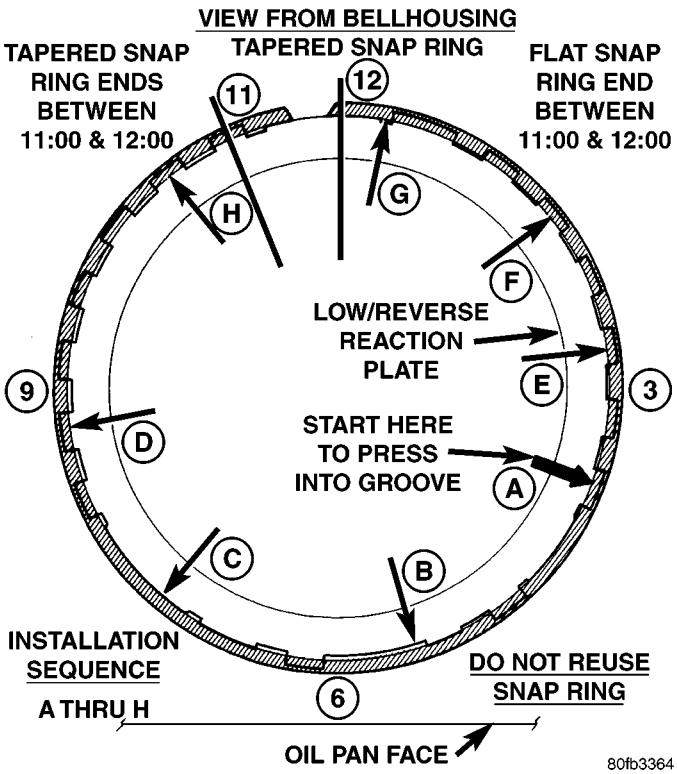


Fig. 104 Tapered Snap Ring Instructions

(19) Measure low/reverse clutch pack. Set up dial indicator as shown in (Fig. 105). Press down clutch pack with finger and zero dial indicator. Record measurement in four (4) places and take average reading. **Low/Reverse clutch pack clearance is 0.84 to 1.60 mm (0.033 to 0.063 inch).**

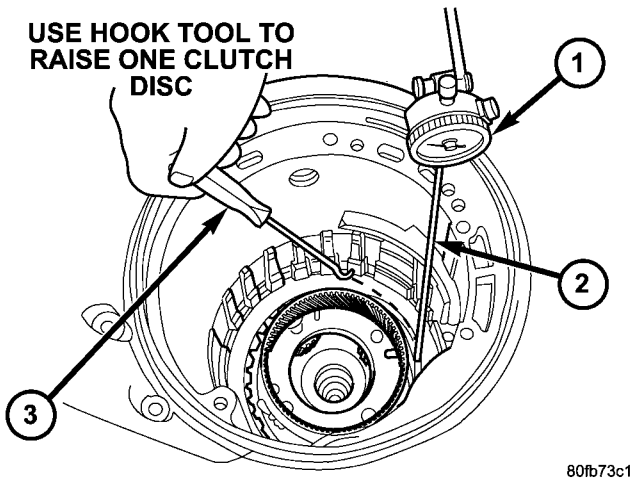


Fig. 105 Check Low/Reverse Clutch Clearance

1 - DIAL INDICATOR
2 - DIAL INDICATOR TIP TOOL 6268
3 - HOOK TOOL

(20) Select the proper low/reverse reaction plate to achieve specifications.

(21) Install 2/4 clutch pack (Fig. 106).