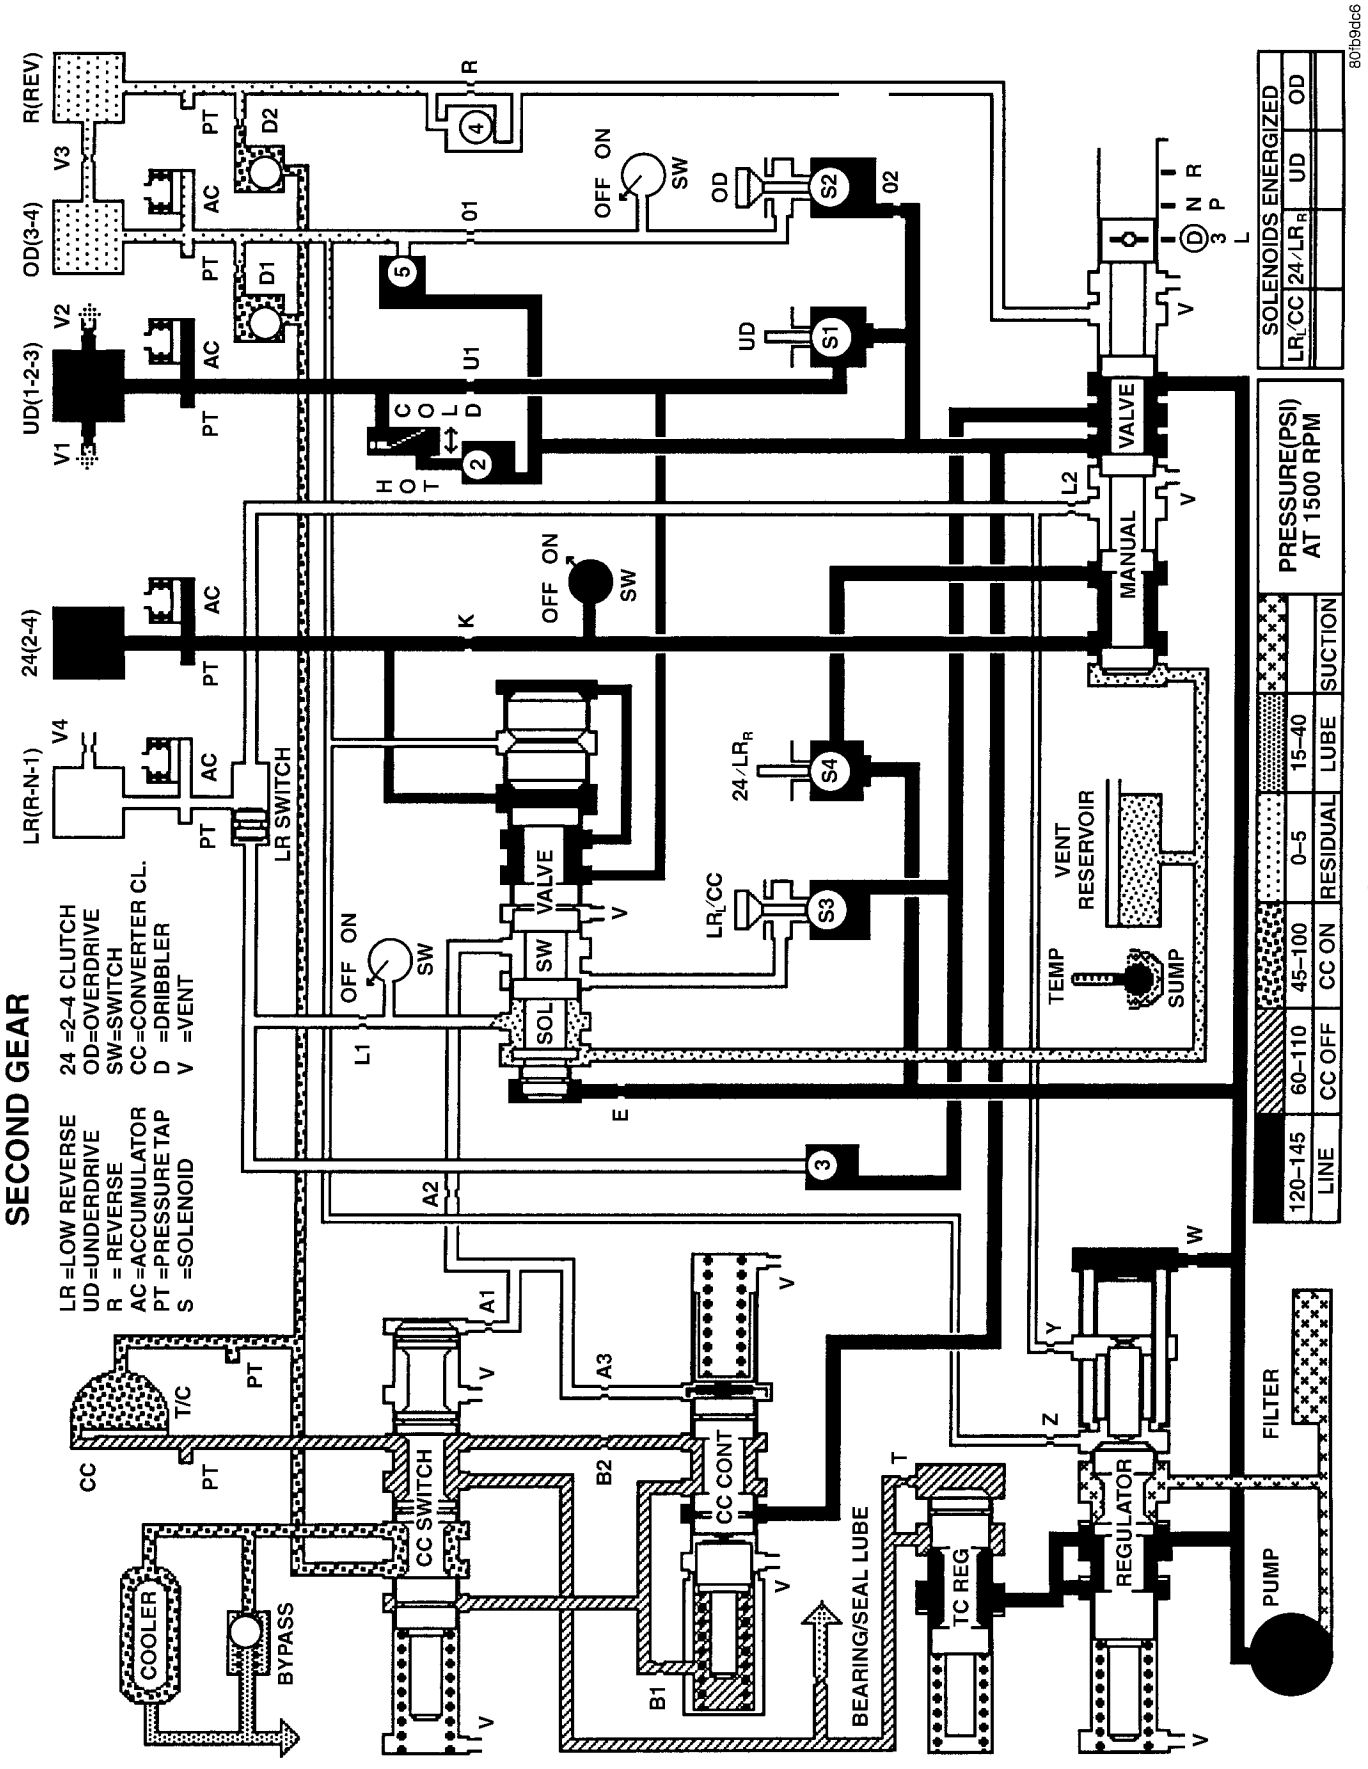
SECOND GEAR
LR =LOW REVERSE
UD=UNDERDRIVE
R = REVERSE
AC =ACCUMULATOR
PT =PRESSURE TAP
S =SOLENOID
24 =2–4 CLUTCH
OD=OVERDRIVE
SW=SWITCH
CC=CONVERTER CL.
D =DRIBBLER
V =VENT
R(REV)
OD(3-4)
UD(1-2-3)
24(2-4)
LR(R-N-1)
V1
V2
V3
V4
AC
PT
D1
D2
LR SWITCH
OFF ON SW
HOT
COLD
CC
T/C
COOLER
BYPASS
CC SWITCH
CC CONT
TC REG
REGULATOR
PUMP
FILTER
BEARING/SEAL LUBE
VALVE
SOL
SW
MANUAL
VENT
RESERVOIR
TEMP
SUMP
S1
S2
S3
S4
UD
OD
24/LR
LR/CC
SOLENOIDS ENERGIZED
LR/CC
24/LR
UD
OD
PRESSURE(PSI)
AT 1500 RPM
LINE
CC OFF
CC ON
RESIDUAL
LUBE
SUCTION
120–145
60–110
45–100
0–5
15–40
P
R
N
D
3
L
2
1
80fb9dc6

Second Gear