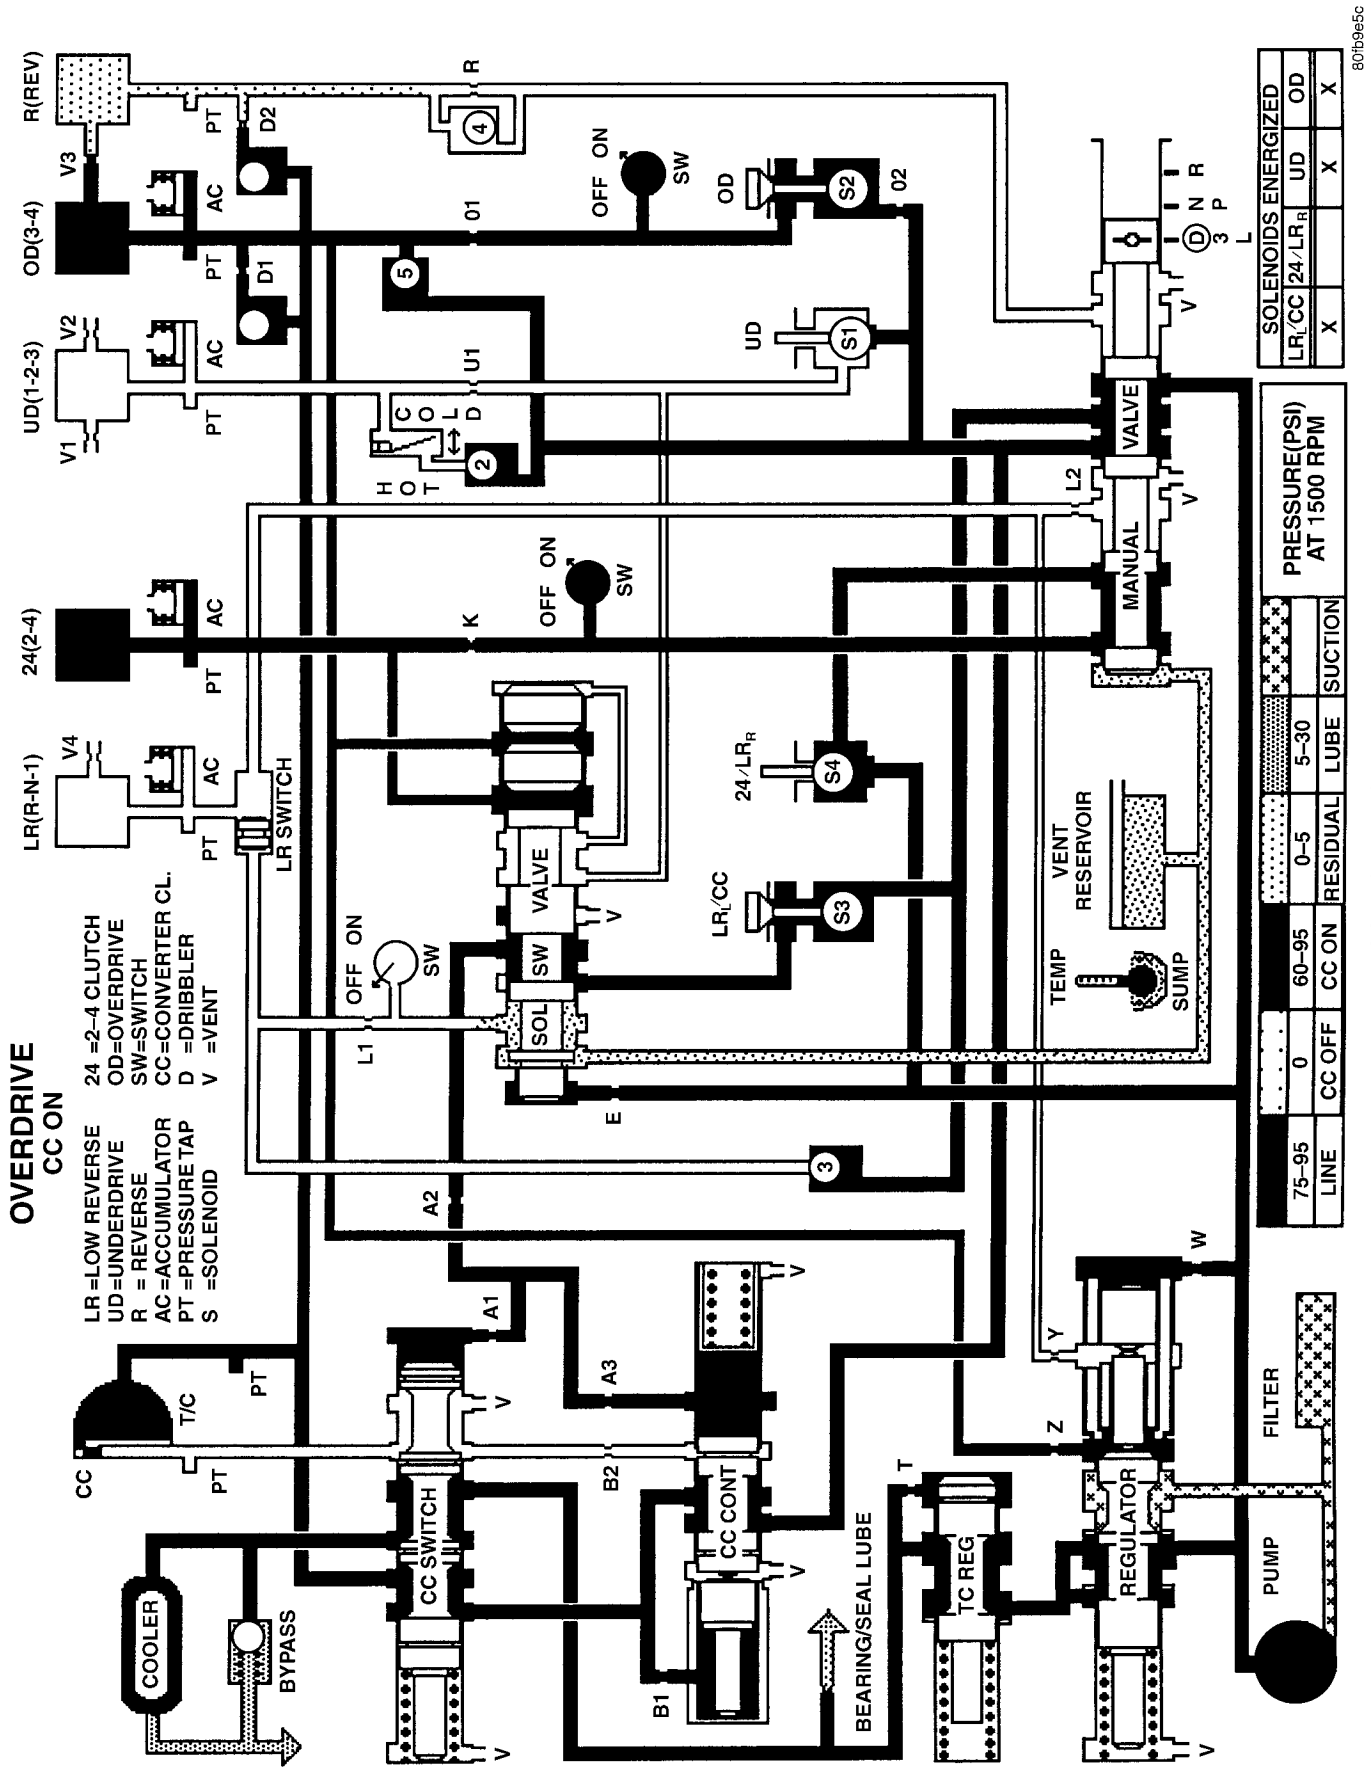
OVERDRIVE
CC ON
LR =LOW REVERSE
UD=UNDERDRIVE
R = REVERSE
AC=ACCUMULATOR
PT =PRESSURE TAP
S =SOLENOID
24 =2–4 CLUTCH
OD=OVERDRIVE
SW=SWITCH
CC=CONVERTER CL.
D =DRIBBLER
V =VENT
R(REV)
OD(3-4)
UD(1-2-3)
LR(R-N-1)
24(2-4)
V1
V2
V3
V4
AC
PT
D1
D2
LR SWITCH
OFF ON SW
VALVE
SOL
MANUAL VALVE
TEMP
VENT RESERVOIR
SUMP
COOLER
BYPASS
T/C
CC SWITCH
CC CONT
TC REG
REGULATOR
PUMP
FILTER
BEARING/SEAL LUBE
SOLENOIDS ENERGIZED
LR/CC
24/LR
UD
OD
PRESSURE(PSI) AT 1500 RPM
LINE
CC OFF
CC ON
RESIDUAL
LUBE
SUCTION
75–95
60–95
0–5
5–30
Overdrive (CC On)
80fb9e5c