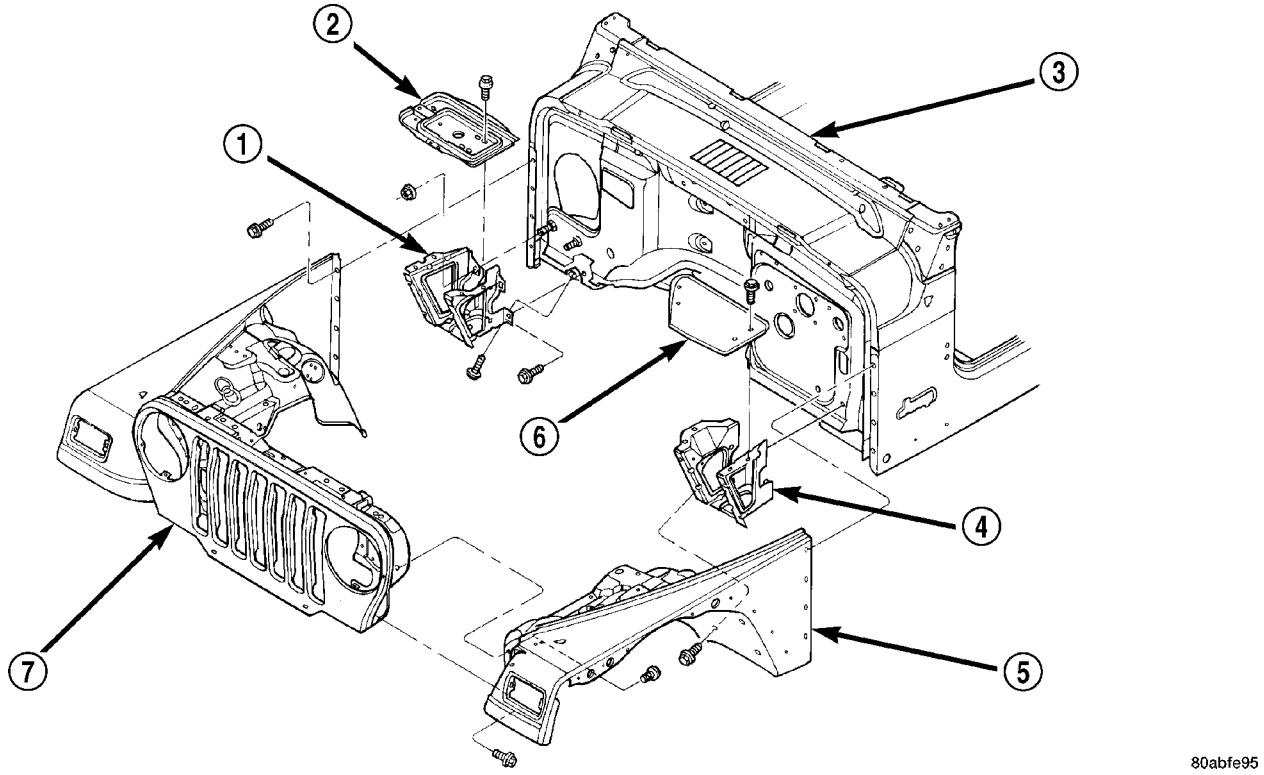

Fig. 2 FRONT FENDER

1 - REINFORCEMENT
2 - BATTERY TRAY
3 - BODY
4 - REINFORCEMENT
5 - FENDER
6 - TRAY
7 - RADIATOR GRILLE PANEL

INSTALLATION

Transfer all related components. Replace harness retainers if damaged.

(1) Position the fender on the vehicle.

(2) Install the bolts attaching the fender to the grille.

(3) Install the bolts attaching the fender to the battery tray reinforcement bracket.

(4) Install the bolts attaching the fender to the cowl.

(5) If equipped, install the fender flare extension and body side molding.

(6) Route the fog lamp (if equipped), park lamp and side marker wire harness through the access hole in the fender well. Seat the grommet.

(7) Engage the headlamp wire connector.

(8) Engage the battery temperature sensor connector.

(9) Engage the vacuum line at the reservoir under the battery tray reinforcement bracket.

(10) Position the front end lighting wire harness into the retainers on the fender. Engage the retainers to secure.

(11) Position the high pressure air conditioning line into the retainer on the fender. Engage the retainer to secure.

(12) Position the PDC on the fender and install the bolts.

(13) Position the PDC wire harness into the retainers on the fender and battery tray. Engage the retainers to secure.

(14) Install the air cleaner housing.

(15) Install the battery tray. (Refer to 8 - ELECTRICAL/BATTERY SYSTEM/TRAY - INSTALLATION)

LEFT FRONT FENDER

REMOVAL

(1) Disconnect the negative terminal on the battery. (Refer to 8 - ELECTRICAL/BATTERY SYSTEM/CABLES - REMOVAL)

(2) Remove the windshield washer reservoir.

(3) Remove horns. (Refer to 8 - ELECTRICAL/HORN/HORN - REMOVAL)

(4) Remove EVAP canister.

(5) Remove the bolts attaching the ABS Hydraulic Control Unit (HCU) to the support tray.

(6) Secure the HCU.

(7) Remove the HCU tray.

(8) Disengage the front end lighting wire harness retainers on the fender.