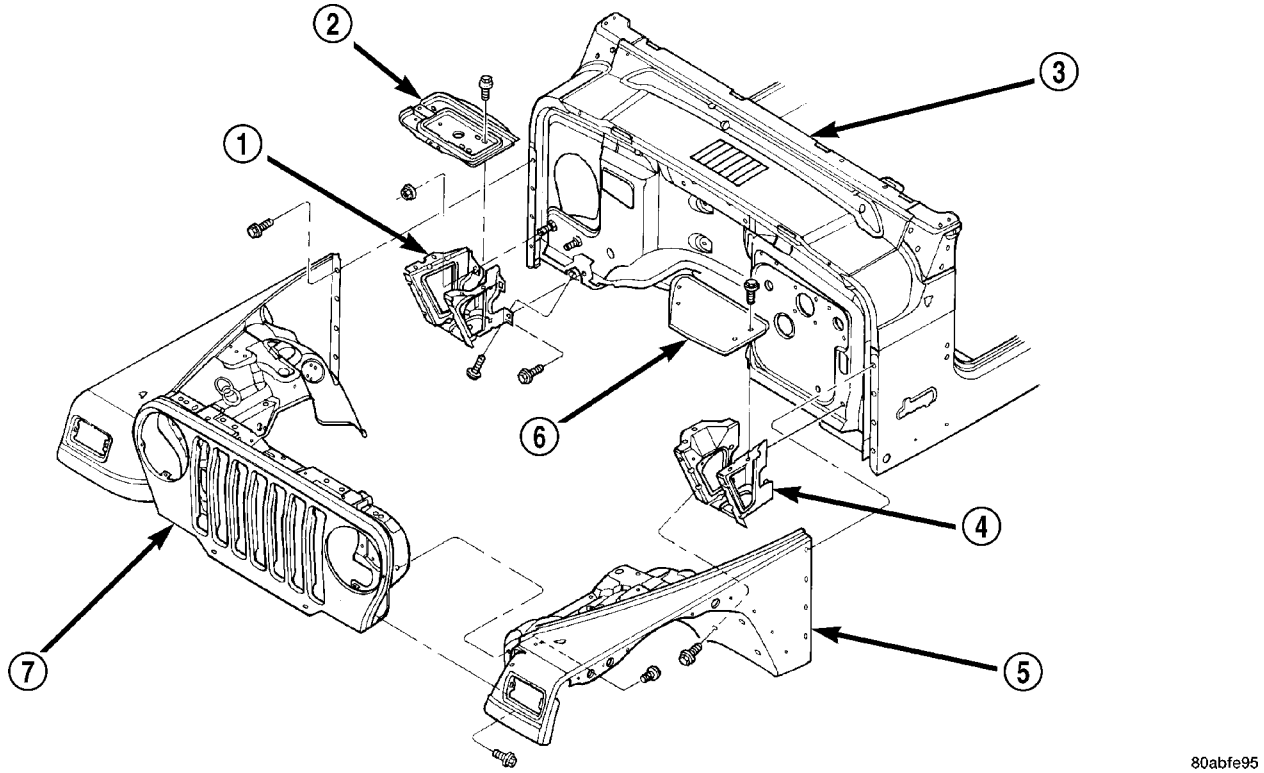

Fig. 3 FRONT FENDER

1 - REINFORCEMENT
2 - BATTERY TRAY
3 - BODY
4 - REINFORCEMENT
5 - FENDER
6 - TRAY
7 - RADIATOR GRILLE PANEL

(12) Remove the bolts attaching the fender to the HCU tray reinforcement bracket.
(13) Remove the bolts attaching the fender to the grille.
(14) Separate the fender from the vehicle.

INSTALLATION

Transfer all related components. Replace harness retainers if damaged.
(1) Position the fender on the vehicle.
(2) Install the bolts attaching the fender to the grille.
(3) Position the front end lighting wire harness into the retainers on the fender. Engage the retainers to secure.
(4) Install the bolts attaching the fender to the HCU tray reinforcement bracket.
(5) Install the bolts attaching the fender to the cowl.
(6) If equipped, install the body side molding.
(7) Route the fog lamp (if equipped), park lamp and side marker wire harness through the access hole in the fender well. Seat the grommet.
(8) Engage the headlamp wire connector.
(9) Install the HCU tray.
(10) Position the HCU on the support tray and install the bolts.
(11) Install EVAP canister.
(12) Install horns. (Refer to 8 - ELECTRICAL/HORN/HORN - INSTALLATION)
(13) Engage horn wire connectors.
(14) Install the windshield washer reservoir.
(15) Connect the negative terminal on the battery. (Refer to 8 - ELECTRICAL/BATTERY SYSTEM/CABLES - INSTALLATION)

RADIATOR GRILLE PANEL

REMOVAL

(1) Remove the front crossmember cover.
(2) Remove the crossmember valence cover.
(3) Remove the radiator overflow bottle.
(4) Remove the bolts that attach the radiator and shroud from the grille panel.
(5) If A/C equipped:
(a) Evacuate the system.
(b) Disconnect the high and low pressure lines at the quick disconnect couplings.
(c) Cover (cap) the lines to prevent contamination.
(6) Remove the bolts attaching the radiator support rods to the grille panel.