(7) Disconnect the head lamp, turn signal, marker lamp and horn wire harness connectors.
(8) Remove the bolts attaching the fenders to the grille panel.
(9) Remove the bolt attaching the grille to the frame mount.
(10) Separate the grille from the vehicle.

INSTALLATION

Transfer all related components.
(1) Position the grille panel on the vehicle. Ensure the rubber support bumpers are aligned (Fig. 4).
(2) Install the bolt attaching the grille to the frame mount.
(3) Install the bolts attaching the fenders to the grille panel.
(4) Connect the head lamp, turn signal, marker lamp and horn wire harness connectors.
(5) Install the bolts attaching the radiator support rods to the grille panel.
(6) If A/C equipped:
(a) Connect the high and low pressure lines at the quick disconnect couplings.
(b) Evacuate and charge the system.
(7) Install the radiator and shroud to the grille panel.
(8) Install the radiator overflow bottle.
(9) Install the crossmember valence cover.
(10) Install the front crossmember cover.

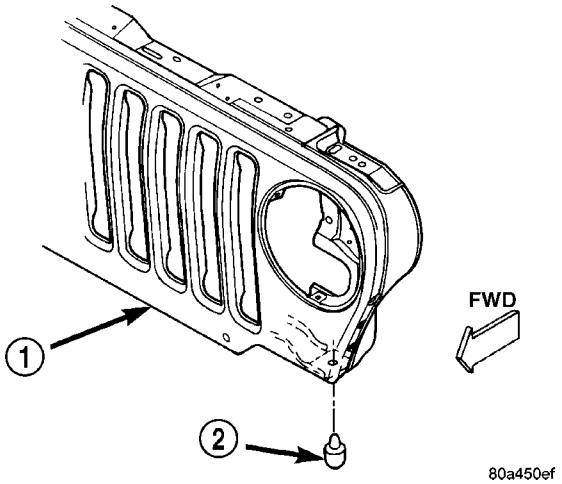

Fig. 4 GRILLE BUMPERS

1 - GRILLE PANEL
2 - BUMPER

WHEELHOUSE SPLASH SHIELD

REMOVAL

(1) Remove the plastic push pins that attach the splash shield to the wheelhouse (Fig. 5).
(2) Remove the push-in fasteners attaching the splash shield to the wheelhouse. (The push-in fasteners are molded into the splash shield.)
(3) Remove the splash shield from the wheelhouse.

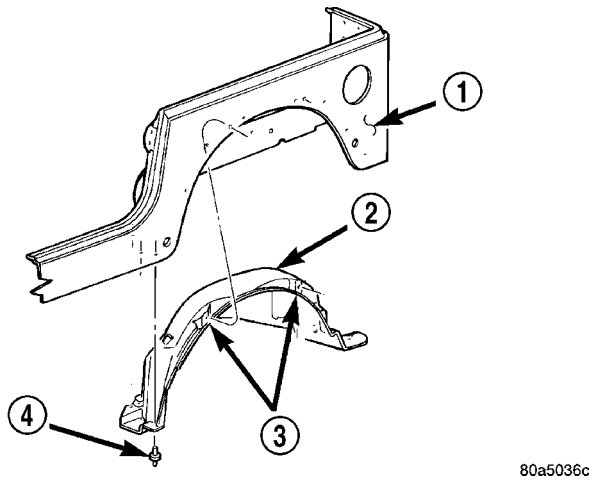

Fig. 5 Wheelhouse Splash Shield

1 - BODY
2 - WHEELHOUSE SPLASH SHIELD
3 - PUSH-IN FASTENERS
4 - RIVET

INSTALLATION

(1) Position the splash shield in the wheelhouse.
(2) Press the splash shield push-in fasteners into place.
(3) Attach the splash shield to the wheelhouse with push pins.

SIDE VIEW MIRROR

REMOVAL

(1) Remove the screws attaching the mirror to the door hinge (Fig. 6).
(2) Remove the mirror from the door hinge.
(3) Disconnect the electrical connector, if equipped.