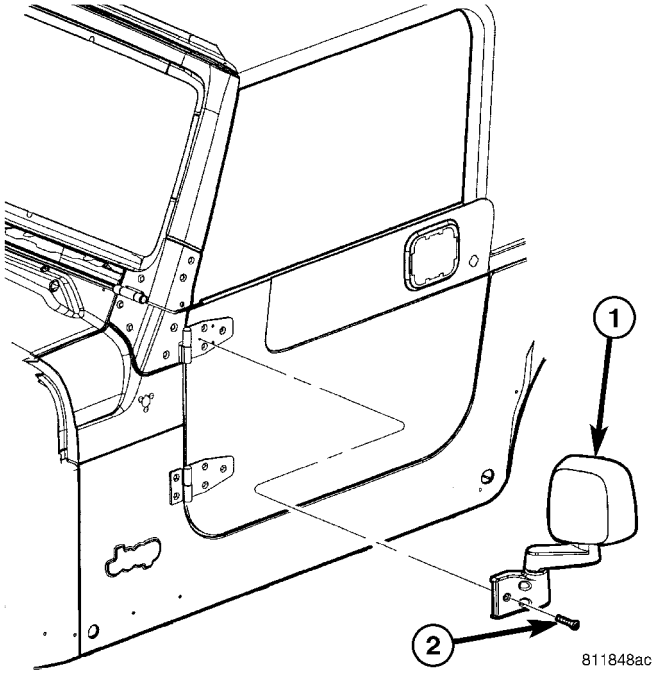

Fig. 6 SIDE VIEW MIRROR

1 - MIRROR ASSEMBLY
2 - SCREWS (3)

INSTALLATION

(1) Clean the door hinge-mirror base contact surface.
(2) Position the mirror base at the door hinge.
(3) Install the three screws attaching the mirror base to the door hinge.

WHEEL OPENING FLARE MOLDING

REMOVAL

(1) Remove the side marker lamp. (Refer to 8 - ELECTRICAL/LAMPS/LIGHTING - EXTERIOR/ MARKER LAMP UNIT - REMOVAL)
(2) Remove the screws that attach the flare to the front fender or rear wheelhouse (Fig. 7).
(3) Separate the flare from the body.