INSTALLATION

(1) Position the trunk in the cargo space.
(2) Install the bolts.

FRONT CARPET

REMOVAL

(1) If necessary, remove the center console. (Refer to 23 - BODY/INTERIOR/CENTER CONSOLE - REMOVAL)
(2) Remove the retainers attaching the carpet to the dash panel (Fig. 2).
(3) Disengage the snaps under front seats.
(4) Remove carpet from the vehicle

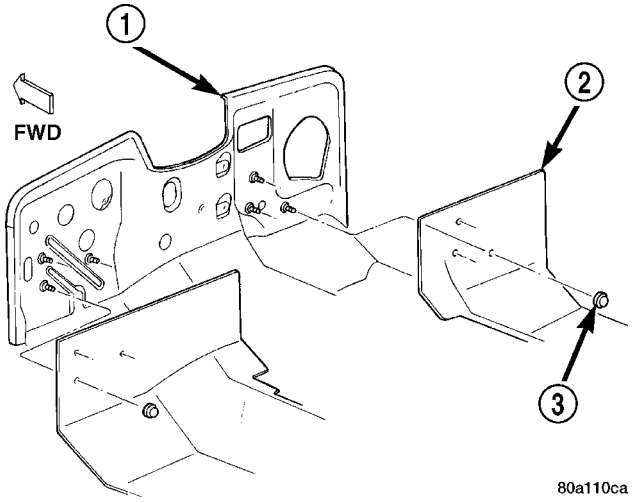

Fig. 2 FRONT CARPET

1 - DASH PANEL
2 - CARPET
3 - PUSH ON RETAINER

INSTALLATION

(1) Position the carpet in the vehicle
(2) Engage the snaps around under front seats.
(3) Install the retainers attaching the carpet to the dash panel.
(4) If previously removed, install the center console. (Refer to 23 - BODY/INTERIOR/CENTER CONSOLE - INSTALLATION)

CENTER CARPET

REMOVAL

(1) Disengage the snaps under front seats.
(2) Remove the carpet.