(7) Lower the top to the rearward position.

(8) Remove the screws attaching the roof bows to the pivot bracket (Fig. 6).

(9) Lift up bows at pivot bracket to disengage from pivot bracket.

(10) Remove the top (Fig. 7).

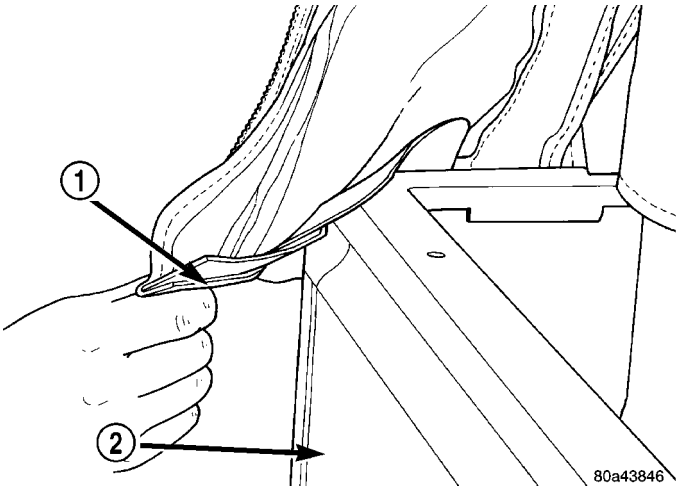

Fig. 5 SOFT TOP J-STRAPS

1 - SOFT TOP CORNER J-STRAP
2 - QUARTER PANEL

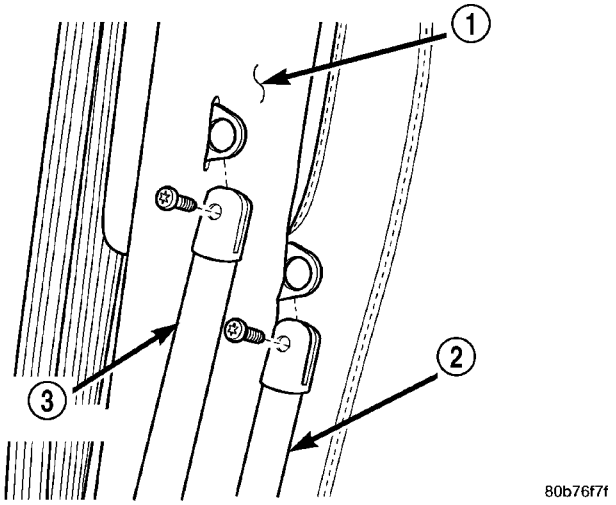

Fig. 6 ROOF BOW REMOVAL

1 - SPORT BAR
2 - REAR ROOF BOW
3 - SIDE ROOF BOW