

HOLD GUN NOZZLE IN DIRECTION OF ARROW IN ORDER TO EFFECTIVELY SEAL METAL JOINTS.



DO NOT HOLD GUN NOZZLE IN DIRECTION OF ARROW. SEALER APPLIED AS SHOWN IS INEFFECTIVE.



3 METAL THICKNESS



2 METAL THICKNESS



3 METAL THICKNESS



2 METAL THICKNESS

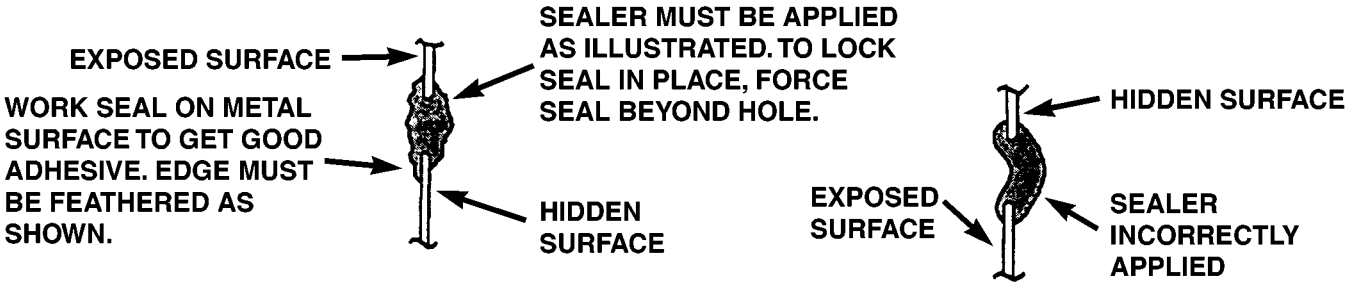

SYMBOLS

	THUMBGRADEABLE SEALER
	EXTRUDABLE THERMOPLASTIC
	EXPOSED THERMOPLASTIC SEALANT
zzzzzzzz	HIDDEN SEALANT

80866cc6

Fig. 8 APPLICATION METHODS