FRONT AXLE - 216FBI (Continued)

SPECIFICATIONS

FRONT AXLE

AXLE SPECIFICATIONS

DESCRIPTION	SPECIFICATION
Axle Ratio	4.10
Ring Gear Backlash	0.12-0.20 mm (0.005-0.008 in.)
Pinion Bearing Preload - Original Bearing	1-2 N·m (10-20 in. lbs.)
Pinion Bearing Preload - New Bearing	2.3-4.5 N·m (20-40 in. lbs.)

TORQUE SPECIFICATIONS

DESCRIPTION	N·m	Ft. Lbs.	In. Lbs.
Fill Plug	34	25	-
Drain Plug	34	25	-
Differential Cover Bolts	41	30	-
Bearing Cap Bolts	108	80	-
Pinion Nut	217-271	160-200	-
Ring Gear Bolts	136	100	-
Axle Nut	237	175	-

SPECIAL TOOLS

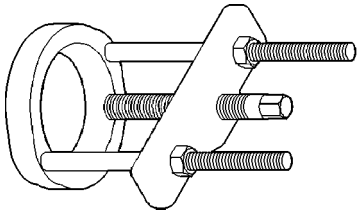

PULLER- C-293-PA



ADAPTERS C-293-39



PLUG C-293-3