DISC BRAKE CALIPERS (Continued)

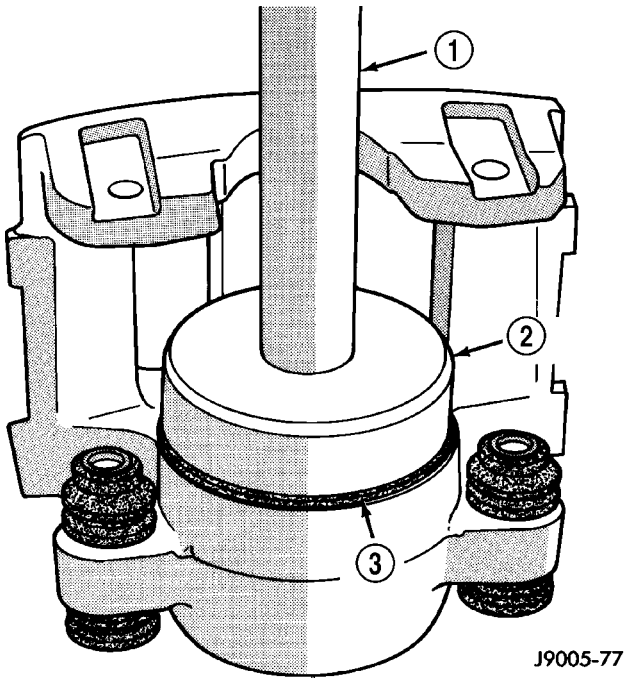


Fig. 22 Piston Dust Boot Installation

1 - HANDLE C-4171
2 - INSTALLER C-4842
3 - DUST BOOT

INSTALLATION

INSTALLATION - FRONT

(1) Clean brake shoe mounting ledges with wire brush and apply light coat of Mopar multi-mileage grease to surfaces (Fig. 23).

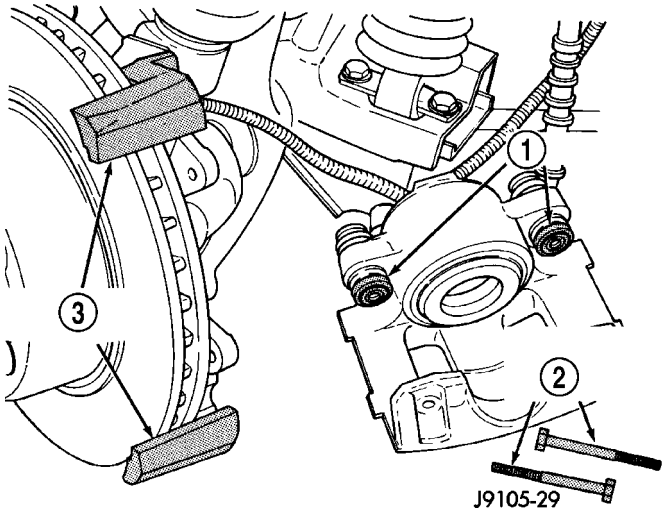


Fig. 23 Caliper Lubrication Points

1 - BUSHINGS
2 - CALIPER MOUNTING BOLTS
3 - MOUNTING LEDGES

(2) Install caliper by position notches at lower end of brake shoes on bottom mounting ledge. Then rotate caliper over rotor and seat notches at upper end of shoes on top mounting ledge (Fig. 24).

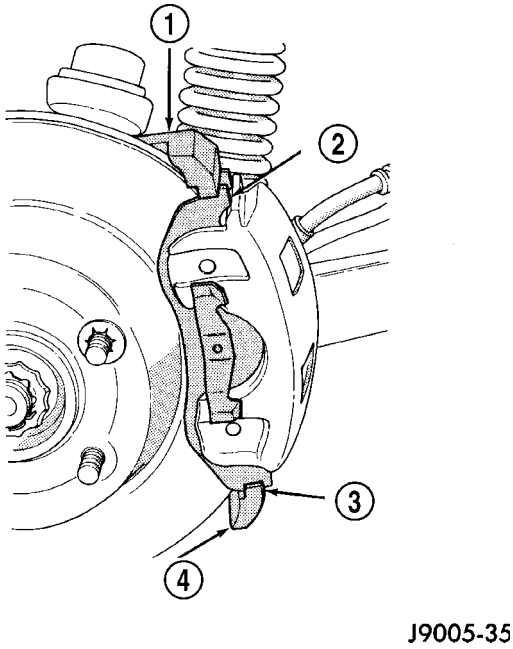


Fig. 24 Caliper Installation

1 - TOP LEDGE
2 - BRAKESHOE TAB ON LEDGE OUTER SURFACE
3 - LEDGE SEATED IN BRAKESHOE NOTCH
4 - BOTTOM LEDGE

(3) Coat caliper mounting bolts with silicone grease. Then install and tighten bolts to 15 N·m (11 ft. lbs.).

CAUTION: If new caliper bolts are being installed, or if the original reason for repair was a drag/pull condition, check caliper bolt length before proceeding. Bolts must not have a shank length greater than 67.6 mm (2.66 in.) (Fig. 25).

CORRECT SHANK LENGTH:

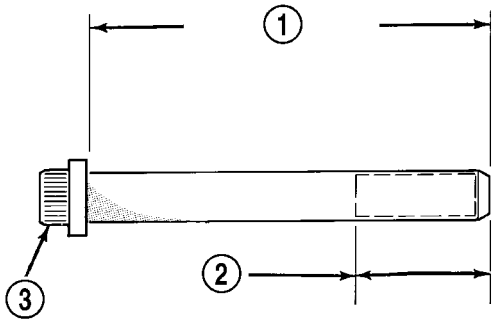


Fig. 25 Mounting Bolt Dimensions

1 - 67 mm (± 0.6 mm) 2.637 in. (± 0.0236 in.)
2 - 22 mm (0.866 in.) THREAD LENGTH
3 - CALIPER BOLT