ANTENNA BODY & CABLE (Continued)

seated on antenna base and that there is no gap between the mast and base.

(6) Reach through the glove box opening and connect the two antenna coaxial cables in line connector.

(7) Install the glove box to the instrument panel (Refer to 23 - BODY/INSTRUMENT PANEL/GLOVE BOX - INSTALLATION).

(8) Connect the battery negative cable.

RADIO

DESCRIPTION

Available factory-installed radio receivers for this model include:

- AM/FM/cassette with CD changer control feature (RBB sales code)
- AM/FM/CD with CD changer control feature (RBK sales code)
- AM/FM/cassette/CD/ with CD changer control feature (RAD, RBT or RBY sales code) - export only

All factory-installed radio receivers can communicate on the Programmable Communications Interface (PCI) data bus network. All factory-installed receivers are stereo Electronically Tuned Radios (ETR) and include an electronic digital clock function.

These radio receivers can only be serviced by an authorized radio repair station. See the latest Warranty Policies and Procedures manual for a current listing of authorized radio repair stations.

OPERATION

The radio receiver operates on ignition switched battery current that is available only when the ignition switch is in the On or Accessory positions. The electronic digital clock function of the radio operates on fused battery current supplied through the IOD fuse, regardless of the ignition switch position.

REMOVAL

WARNING: ON VEHICLES EQUIPPED WITH AIRBAGS, (REFER TO ELECTRICAL/RESTRAINTS) BEFORE ATTEMPTING ANY STEERING WHEEL, STEERING COLUMN, OR INSTRUMENT PANEL COMPONENT DIAGNOSIS OR SERVICE. FAILURE TO TAKE THE PROPER PRECAUTIONS COULD RESULT IN ACCIDENTAL AIRBAG DEPLOYMENT AND POSSIBLE PERSONAL INJURY.

(1) Disconnect and isolate the battery negative cable.

(2) Remove the instrument panel top cover from the instrument panel. (Refer to 23 - BODY/INSTRUMENT PANEL/INSTRUMENT PANEL TOP COVER - REMOVAL).

(3) Remove the center bezel (Refer to 23 - BODY/INSTRUMENT PANEL/INSTRUMENT PANEL CENTER BEZEL - REMOVAL).

(4) Remove the screws that secure the radio to the instrument panel.

(5) If the vehicle is equipped with the CD radio, go to Step 6. If the vehicle is not equipped with the CD radio receiver, go to Step 8.

(6) Remove the glove box from the instrument panel. (Refer to 23 - BODY/INSTRUMENT PANEL/GLOVE BOX - REMOVAL).

(7) Reach through the instrument panel glove box opening to access and remove the nut that secures the CD radio bracket and the ground strap to the back of the radio.

(8) Pull the radio out from the instrument panel far enough to access the wire harness connectors and the antenna coaxial cable connector.

(9) Unplug the wire harness connectors from the rear of the radio.

CAUTION: Pulling the antenna cable straight out of the radio without pulling on the locking antenna connector could damage the cable or radio.

(10) Disconnect the antenna cable by pulling the locking antenna connector away from the radio (Fig. 3).

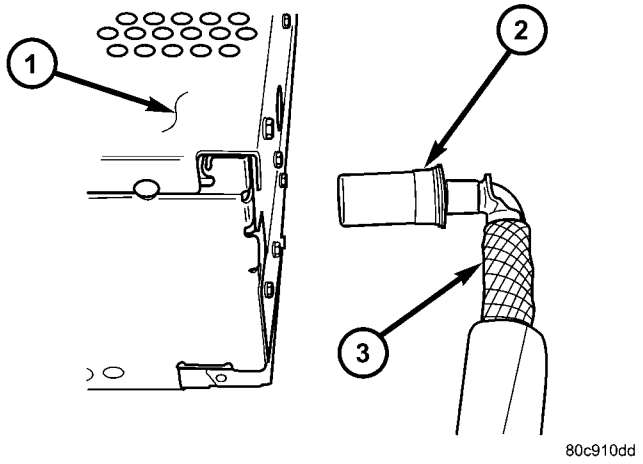

Fig. 3 ANTENNA TO RADIO

1 - RADIO
2 - LOCKING ANTENNA CONNECTOR
3 - INSTRUMENT PANEL ANTENNA CABLE

(11) Remove the radio from the instrument panel.