POWERTRAIN CONTROL MODULE (Continued)

INSTALLATION

USE THE DRB SCAN TOOL TO REPROGRAM THE NEW POWERTRAIN CONTROL MODULE (PCM) WITH THE VEHICLES ORIGINAL IDENTIFICATION NUMBER (VIN) AND THE VEHICLES ORIGINAL MILEAGE. IF THIS STEP IS NOT DONE, A DIAGNOSTIC TROUBLE CODE (DTC) MAY BE SET.

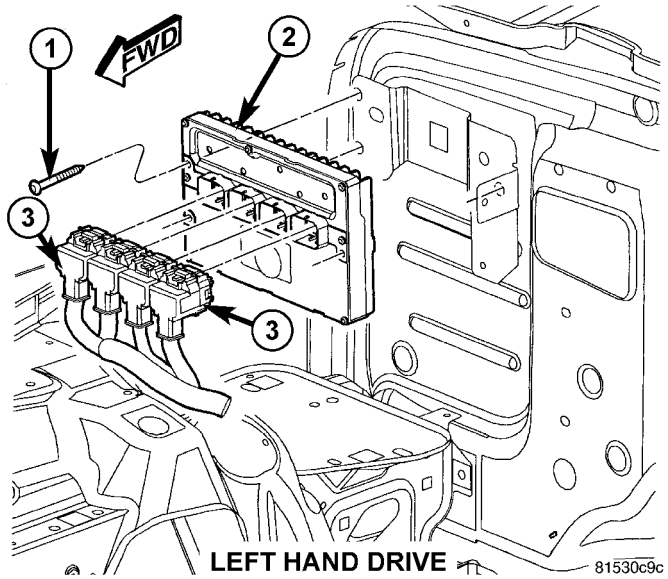

Fig. 7 PCM MOUNTING - LEFT HAND DRIVE

1 - MOUNTING SCREWS (3)
2 - PCM
3 - PCM ELECTRICAL CONNECTORS

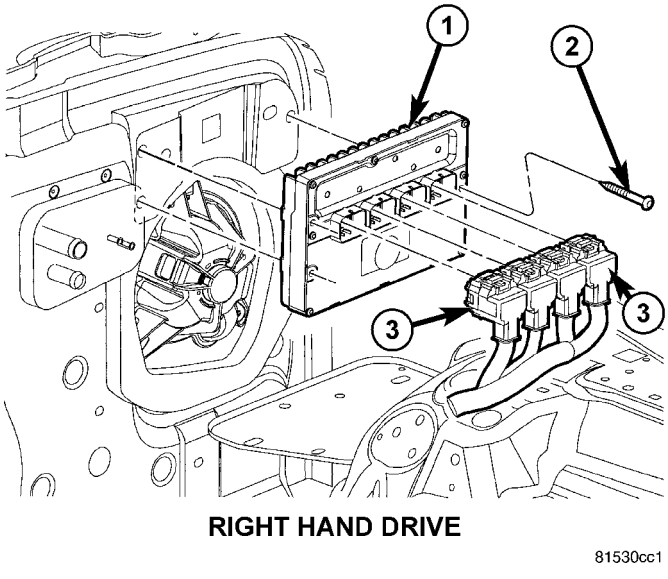

Fig. 8 PCM MOUNTING - RIGHT HAND DRIVE

1 - PCM
2 - MOUNTING SCREWS (3)
3 - PCM ELECTRICAL CONNECTORS

(1) Install PCM and three mounting screws to vehicle.

(2) Tighten screws to 4 N·m (35 in. lbs.).

(3) Check pin connectors in PCM and four electrical connectors for corrosion or damage. Also check pin heights in connectors. Pin heights should all be the same. Repair as necessary before installing electrical connectors.

(4) Install four electrical connectors (3) (Fig. 7) or (Fig. 8) to PCM.

(5) Install plastic shield to electrical connectors. Shields snap to connectors.

(6) Install battery cable.

(7) Use a scan tool to reprogram new PCM with vehicles original Vehicle Identification Number (VIN) and original vehicle mileage.

SENTRY KEY IMMOBILIZER MODULE

DESCRIPTION

The Sentry Key Immobilizer Module (SKIM) is the primary component of the Sentry Key Immobilizer System (SKIS) (Fig. 9). The SKIM is located in the steering column, below the ignition lock cylinder housing. The SKIM has an integral halo-like antenna ring that extends from one end. When the SKIM is properly installed on the steering column, the antenna ring is oriented around the circumference of the ignition lock cylinder housing.

The SKIM cannot be adjusted or repaired. If faulty or damaged, the entire SKIM unit must be replaced.

OPERATION

The Sentry Key Immobilizer Module (SKIM) contains a Radio Frequency (RF) transceiver and a microprocessor. The SKIM transmits RF signals to, and receives RF signals from the Sentry Key transponder through a tuned antenna enclosed within the molded plastic antenna ring integral to the SKIM housing. If this antenna ring is not mounted properly around the ignition lock cylinder housing, communication problems between the SKIM and the transponder may arise. These communication problems will result in Sentry Key transponder-related faults. The SKIM also communicates over the Programmable Communications Interface (PCI) data bus with the Powertrain Control Module (PCM), the ElectroMechanical Instrument Cluster (EMIC) and/or the DRBIII® scan tool.

The SKIM retains in memory the ID numbers of any Sentry Key transponder that is programmed into it. A maximum of eight Sentry Key transponders can be programmed into the SKIM. For added system security, each SKIM is programmed with a unique