FOG LAMP UNIT - REAR (Continued)

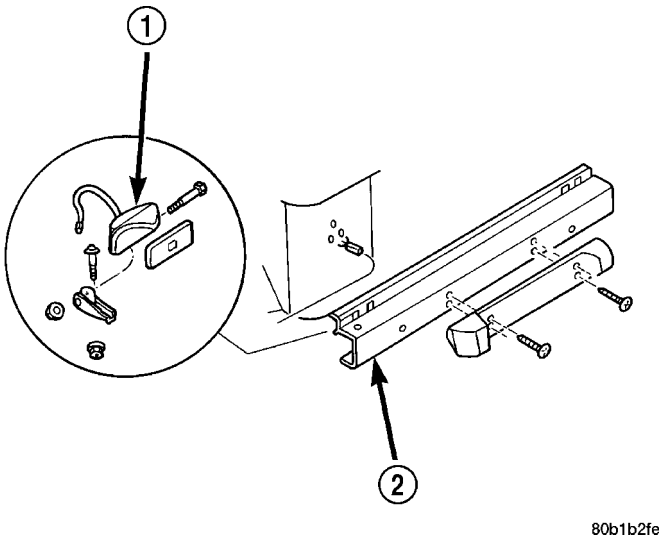

Fig. 13 Rear Fog Lamp Unit

1 - REAR FOG LAMP UNIT
2 - REAR BUMPER ASSEMBLY

INSTALLATION

(1) Position the rear fog lamp unit to the vehicle.
(2) Connect the wire harness connector to the rear fog lamp connector.
(3) Install the screws that secure the rear fog lamp unit to the rear bumper assembly.
(4) Reconnect the negative battery cable.

FOG LAMP - REAR

REMOVAL

(1) Disconnect and isolate the battery negative cable.
(2) Remove the screws that secure the rear fog lamp lens to the housing (Fig. 14).
(3) Push and rotate the rear fog lamp one-third turn counterclockwise, then pull the lamp straight out of the socket (Fig. 15).

INSTALLATION

(1) Install the rear fog lamp by pushing the lamp into the rear fog lamp socket and turning it one-third clockwise.
(2) Position the rear fog lamp lens onto the housing.
(3) Install the screws that secure the rear fog lamp lens onto the housing.
(4) Reconnect the negative battery cable.

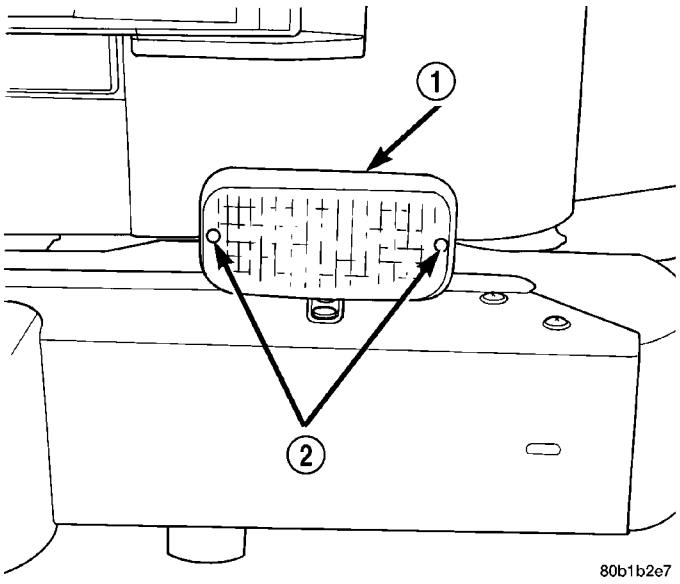

Fig. 14 Rear Fog Lamp Lens

1 - REAR FOG LAMP
2 - FOG LAMP LENS SCREWS

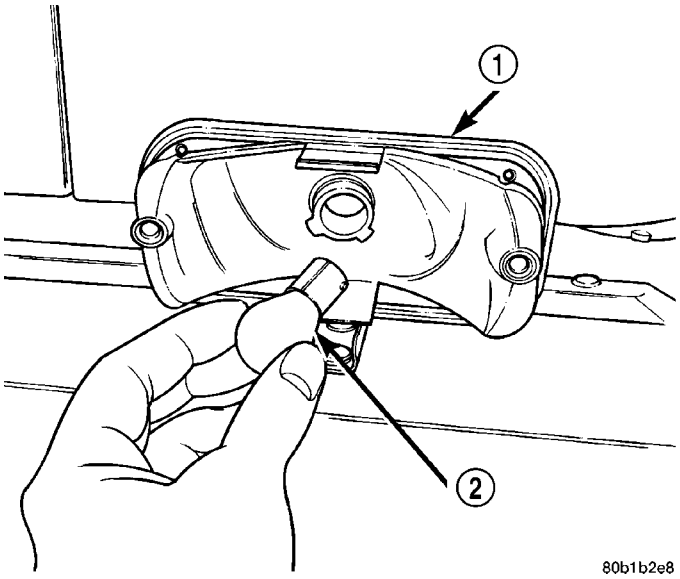

Fig. 15 Rear Fog Lamp

1 - REAR FOG LAMP HOUSING
2 - REAR FOG LAMP

FRONT PARK/TURN SIGNAL LAMP UNIT

DESCRIPTION

A front turn signal/parking lamp assembly is mounted to each front fender. Each front turn signal/parking lamp assembly consist of a housing, lens and lamp.