CHILD RESTRAINT ANCHOR (Continued)

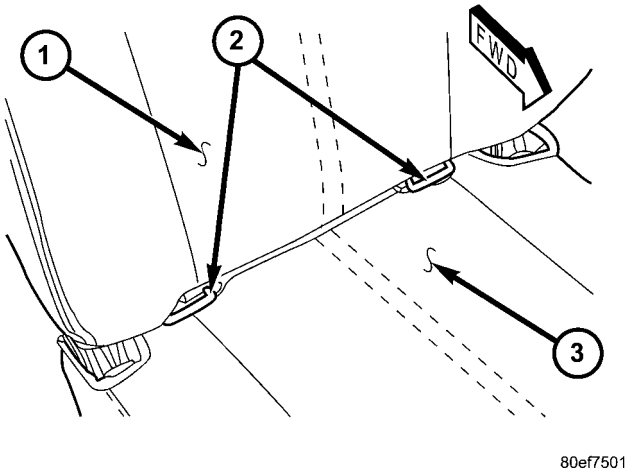

Fig. 11 Front Passenger Seat Lower Anchors

1 - SEAT BACK
2 - LOWER ANCHOR (2)
3 - SEAT CUSHION

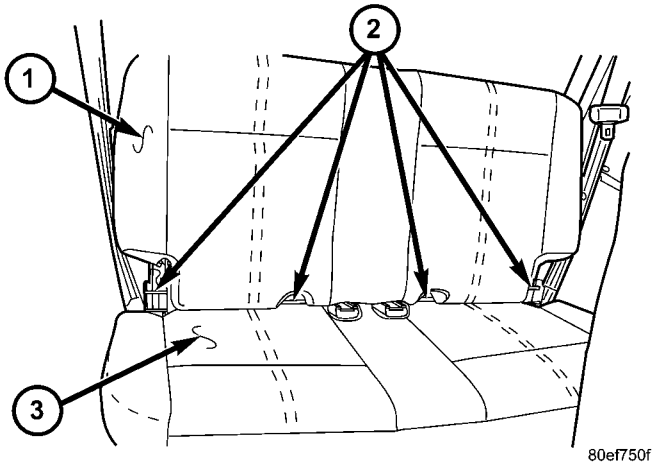

Fig. 13 Rear Seat Lower Anchors

1 - SEAT BACK
2 - LOWER ANCHOR (4)
3 - SEAT CUSHION

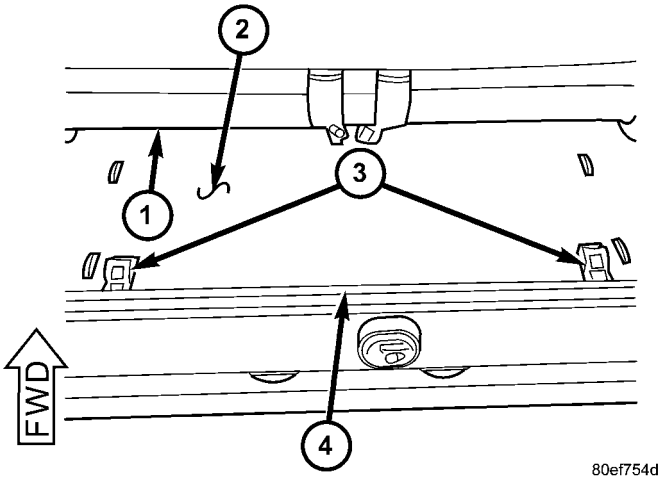

Fig. 12 Rear Seat Upper Anchors

1 - REAR SEAT
2 - REAR CARGO FLOOR
3 - UPPER ANCHOR (2)
4 - TAILGATE OPENING SILL

opening, and are accessed from behind the rear seat. The upper tether anchors for the rear seat are available for individual service replacement. The four fixed lower anchors are integral to the rear seat back frame and are accessed from the front of the rear seat, where the seat back meets the seat cushion. The two inboard lower anchors are constructed from round steel bar stock that is formed into a U-shape, then securely welded at each end to the rear seat back frame. The two outboard lower anchors are machined steel pins that are secured between the two seat back hinge plates above the pivot pin on each outboard side of the rear seat back frame. These lower anchors cannot be adjusted or repaired and, if faulty or damaged, they must be replaced as a unit with the rear seat back frame.

WARNING: DURING AND FOLLOWING ANY SEAT BELT OR CHILD RESTRAINT ANCHOR SERVICE, CAREFULLY INSPECT ALL SEAT BELTS, BUCKLES, MOUNTING HARDWARE, RETRACTORS, TETHER STRAPS, AND ANCHORS FOR PROPER INSTALLATION, OPERATION, OR DAMAGE. REPLACE ANY BELT THAT IS CUT, FRAYED, OR TORN. STRAIGHTEN ANY BELT THAT IS TWISTED. TIGHTEN ANY LOOSE FASTENERS. REPLACE ANY BELT THAT HAS A DAMAGED OR INOPERATIVE BUCKLE OR RETRACTOR. REPLACE ANY BELT THAT HAS A BENT OR DAMAGED LATCH PLATE OR ANCHOR PLATE. REPLACE ANY CHILD RESTRAINT ANCHOR OR THE UNIT TO WHICH THE ANCHOR IS INTEGRAL THAT HAS BEEN BENT OR DAMAGED. NEVER ATTEMPT TO REPAIR A SEAT BELT OR CHILD RESTRAINT COMPONENT. ALWAYS REPLACE DAMAGED OR FAULTY SEAT BELT AND CHILD RESTRAINT COMPONENTS WITH THE CORRECT, NEW AND UNUSED REPLACEMENT PARTS LISTED IN THE DAIMLERCHRYSLER MOPAR PARTS CATALOG.

OPERATION

See the owner's manual in the vehicle glove box for more information on the proper use of all of the factory-installed child restraint anchors.

REMOVAL

The following procedure applies only to the rear seat upper child tether anchors used on models equipped with an optional rear seat. The child